

Your Dream Pool, Our Precision

FENTON POOLS offers premium swimming pool solutions with cutting-edge technology, elegant design, and long-lasting performance. From concept to completion, we ensure a perfect blend of aesthetics and functionality for residential and commercial spaces.

FENTON[®]
POOLS



Email id : info@fentonwater.com

Phone No. : 9982533337

www.fentonwater.com

Office Add. : Plot No 79, Parashram Nagar Behind
Baba Paradise, Patrakar Colony Road, Golyawas,
Mansarovar, Jaipur-302020, Rajasthan

Company

Fenton Technologies Pvt. Ltd. is a pioneering Indian company specializing in advanced engineering solutions across water treatment, and pool infrastructure. With innovation at our core, we design and deliver high-performance, reliable, and sustainable products tailored for real-world applications.

Jacuzzi

Fenton designs premium Jacuzzi systems that blend comfort, luxury, and advanced hydrotherapy. With a focus on quality engineering and aesthetic appeal, Fenton ensures a rejuvenating spa experience tailored for homes, hotels, and wellness spaces.



Water Parks

Fenton contributes to fun and safety in water parks by providing high-performance water systems, filtration setups, and custom-designed pool infrastructure. Our solutions are built to handle high footfall while delivering consistent water quality and thrill.



FENTON®
POOLS



Fenton crafts visually stunning infinity pools that seamlessly merge with the horizon. Through precision engineering and elegant finishes, we deliver a luxurious, resort-style pool experience for both private and commercial spaces.

Infinity Pool



Designed for elegance and efficiency, Fenton's home and villa pools bring the joy of a personal retreat to your doorstep. We offer end-to-end solutions from design to execution making each pool a perfect blend of style, comfort, and smart water management.

Home & Villa Pool

Our Clients



About us



MSME
सूक्ष्म, लघु एवं मध्यम उद्यम
MICRO, SMALL & MEDIUM ENTERPRISES



#startupindia



CONTENT

Wall-mounted Filter	02-12
Inground Filter	13-25
Sand Filter Series	26-38
Pump Series	39-47
Underwater Light Series	48-58
SPA Series	59-67
Machine Room Equipment	68-80
Pool Surrounding Accessories	81-92
Ladder Series	93-96
Cleaning Equipment	97-101

Wall-Mounted Filter



FENTON®
 POOLS


Wall-mounted Filter

Model: PK8025


The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean.

The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost.

The filter is made according to Countries codes and standards.

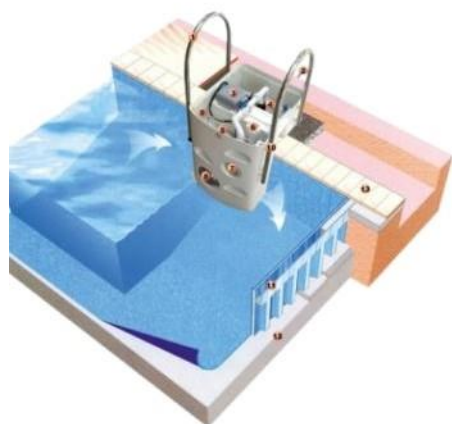

1. Stainless-steel hand rail
2. Cable pipe
3. Transformer and terminal box
4. Sewage pipe
5. Cartridge filter
6. Sterilizer
7. Injector nozzle
8. Swimming pool light
9. Water inlet
10. Water outlet
11. Hoarding
12. Concrete
13. Poolside tile

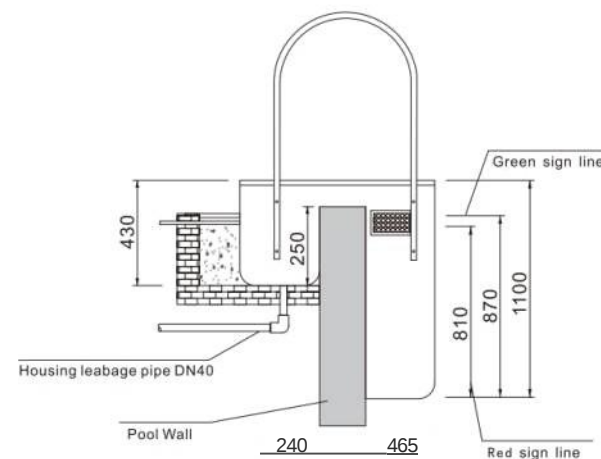

TECHNICAL CHARACTERISTICS


Dimensions	1120x 690x 1100mm
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	5u
Operating noise	≤50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Chlorine feeder	1pc
Light	1x LED 12W/ 12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc (options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

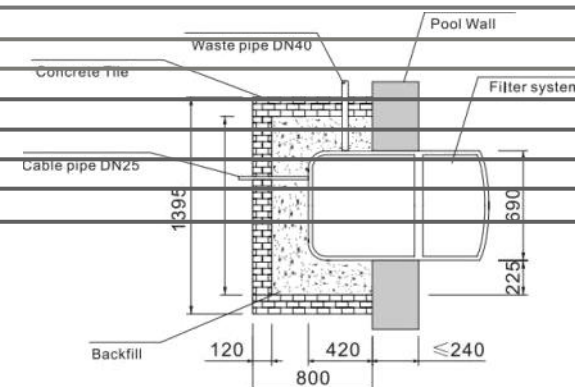
FENTON®
 POOLS

Wall-mounted Filter

Model: PK8020 (Children Swimming Pool)

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean.

The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost.

The filter is made according to Countries codes and standards.



CHARACTERISTICS



Dimensions	1110x 670x 780mm
Flow rate	10m³/h 15m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	150Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x1HP	1x1 SHP
Filtration basket with bag	1pc	
Chlorine feeder	1pc	
Light	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

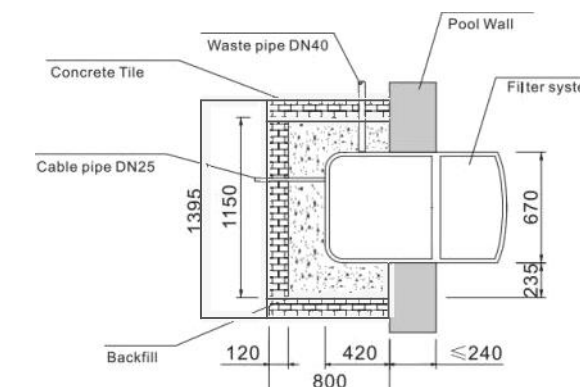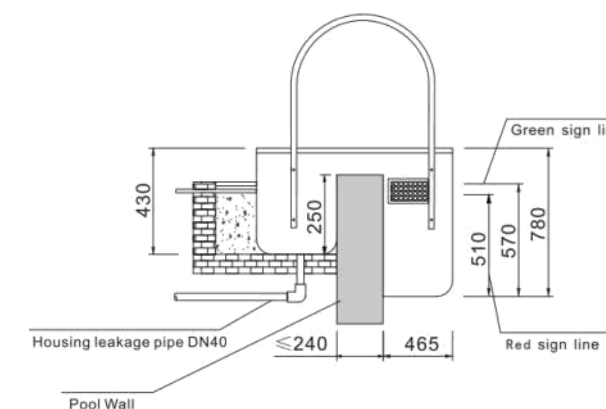

FENTON®
 POOLS

Wall-mounted Filter

Model: PK8026

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



TECHNICAL CHARACTERISTICS



Dimensions	1150x 710x 1090mm
Flow rate	25m³/h 35m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	≤50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP	1x3HP
Filtration basket with bag	1pc	2pcs
Chlorine feeder	1pc	
Light	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM


Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

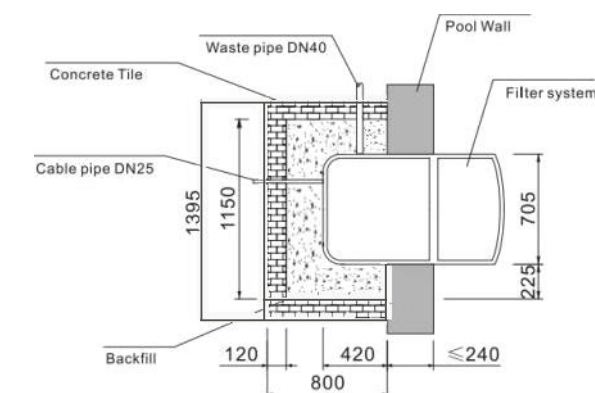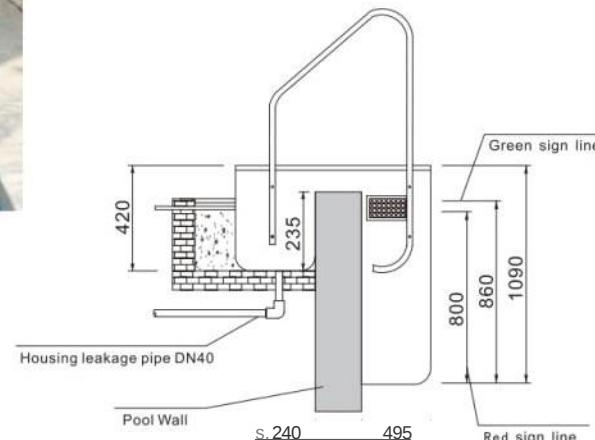

Wall-mounted Filter

Model: PK8028

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



leaf basket




spray nozzle



Chlorine feeder



Injector nozzle



LED Underwater light



Filter bag

TECHNICAL CHARACTERISTICS


Dimensions	1150x 710x 1090mm
Flow rate	25m³/h 25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	T50Db
Material	Acrylic
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP	1x3HP
Filtration basket with bag	1pc	2pcs
Chlorine feeder	1pc	
Light	1x LED	12W/12V
Time controller	1pc	
Swim jet	2pcs	
Handle rail (S.S.)	2pcs	
Ozone	1pc	(options)

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

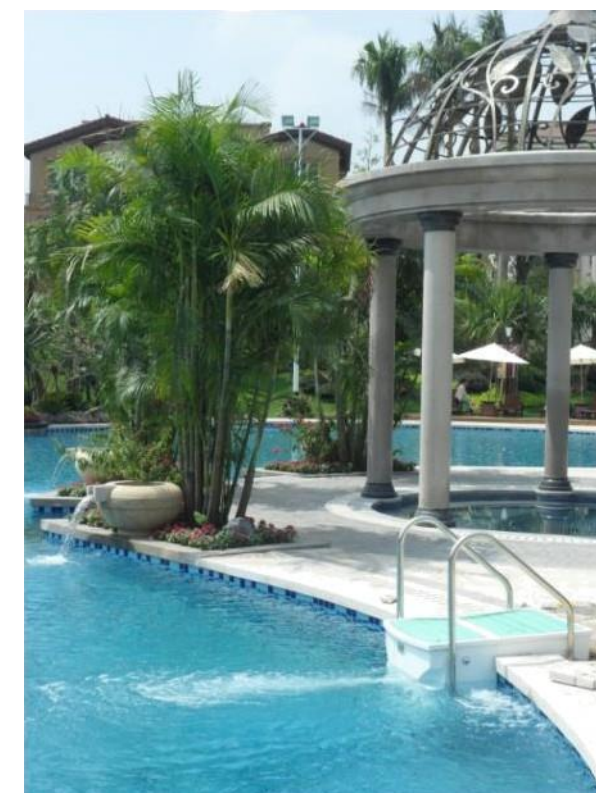


FENTON®
 POOLS

Wall-mounted Filter

PK8023

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.

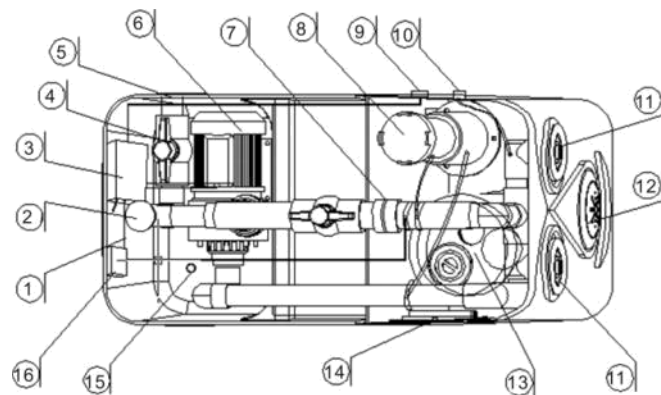

- | | |
|-------------------------------|-----------------------------|
| 1. filter shell | 10. air controller on/off |
| 2. water injector | 11. spa jet |
| 3. control box | 12. pool light |
| 4. drain valve | 13. water filter |
| 5. drain water pipe | 14. water inlet |
| 8. water pump | 15. pressure water purifier |
| 7. active connector | 1d. Ozone disinfection |
| g. chlorinator feeder | |
| 9. make air controller on/off | |

TECHNICAL CHARACTERISTICS


Dimensions	1050x550x860mm
Flow rate	10m³/h
Voltage	220V / 50Hz / 60Hz
Precision of filtration bag	15U
Operating noise	150Db
Material	Acrylic
Installation	Wall mounted

E

Filtration Pump	1x1HP
Filtration basket with bag	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc


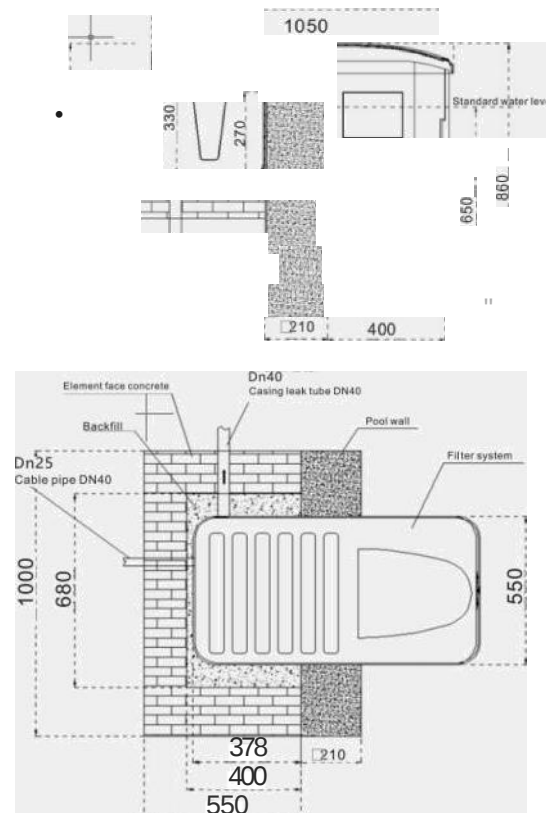


Wall-mounted Filter

FENTON®
 POOLS

Model: PK8030

The enclosure of wall-mounted filter is made of high quality acrylic, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. This model is higher flow rate with 8pcs filter bags for big swimming pool. The filter is made according to Countries codes and standards.

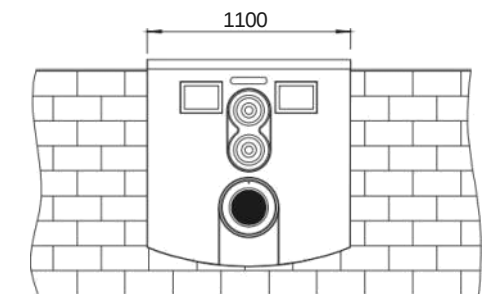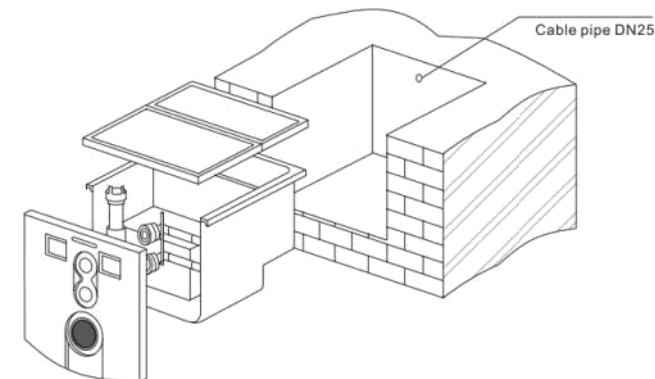

TECHNICAL CHARACTERISTICS


Dimensions	1100x1200x1120mm
Flow rate	47m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	5u
Operating noise	<50Db
Material	Acrylic
Installation	Inground

EG PK1EN

Filtration Pump	1x4HP
Filtration basket with bag	8pc
Chlorine feeder	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs x 5"

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

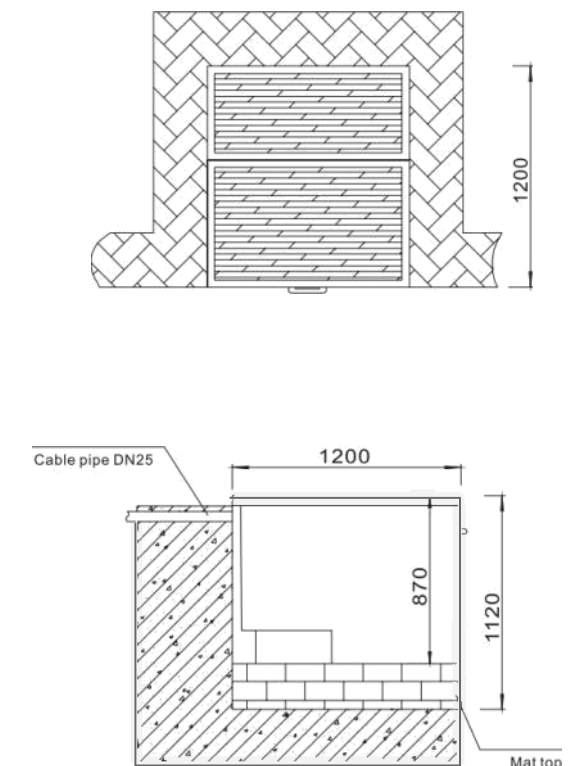

FENTON® POOLS

Wall-mounted Filter

Model: PK8021 (Children Swimming Pool)

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost.

The filter is made according to Countries codes and standards.



TECHNICAL CHARACTERISTICS



Dimensions	950x580x800mm
Flow rate	10m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	≤5u
Operating noise	50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x1.5HP
Filtration basket with bag	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

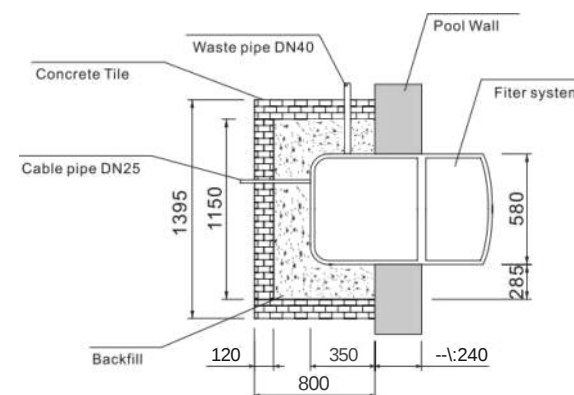
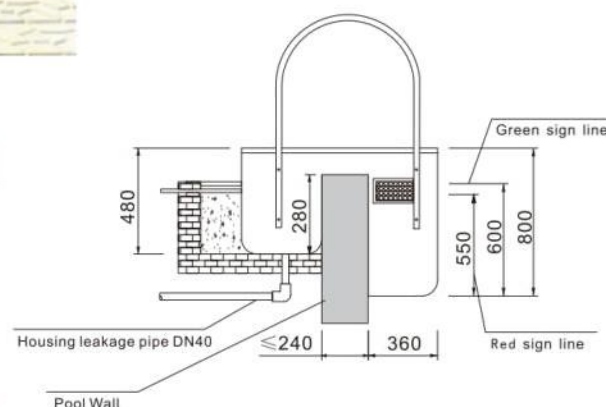


Wall-mounted Filter

Model: PK8029

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost.

The filter is made according to Countries codes and standards.

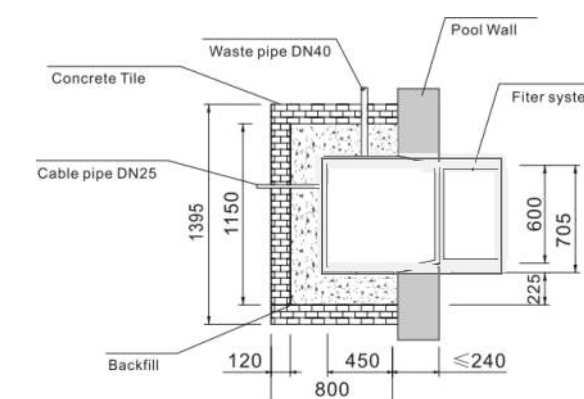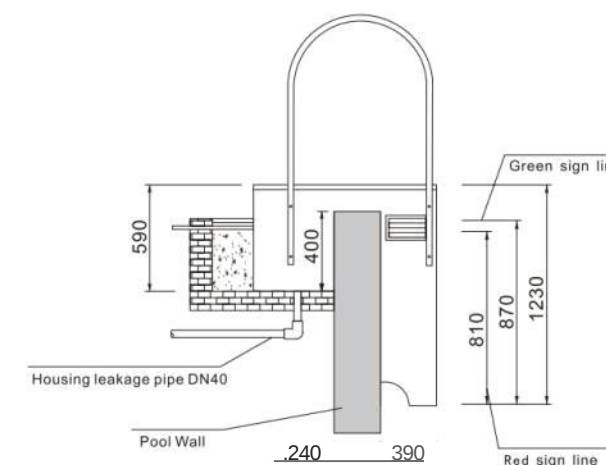

TECHNICAL CHARACTERISTICS

Dimensions	1095x 705x 1230mm
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	^5u
Operating noise	50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT

Filtration Pump	1x2HP
Filtration basket with bag	1pc
Chlorine feeder	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Handle rail (S.S.)	2pcs
Ozone	1pc (options)

SYSTEM



Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

FENTON® POOLS

Wall-mounted Filter

Model PK8032

The enclosure of wall-mounted filter is made of Polyethylene. The integrated filter replaces the traditional sand filter and can be installed without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.

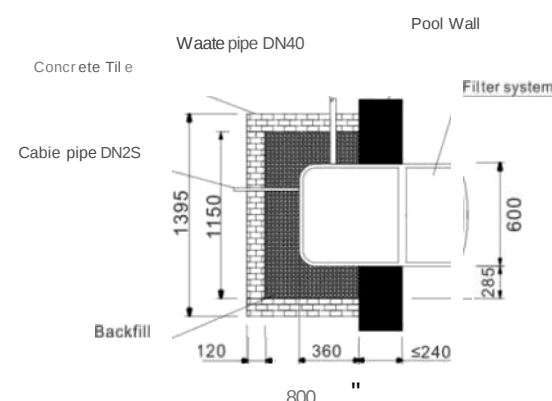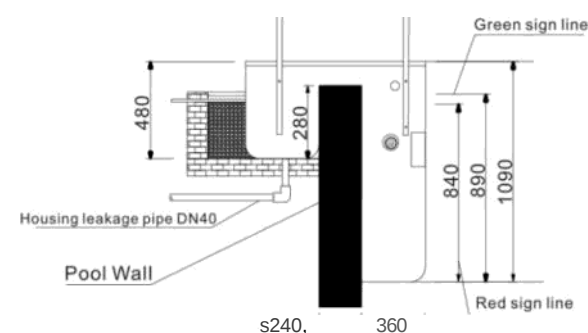

CHARACTERISTICS	
Dimensions	1090X600 X960
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	15u
Operating noise	50Db
Material	Polyethylene
Installation	Wall mounted

EQUIPMENT	
Filtration Pump	1x2HP
Filtration basket with bag	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc



Wall-mounted Filter

Model: PK8022

The enclosure of wall-mounted filter is made of high quality ABS, which is anti-acid, anti-fading and easy to clean. The integrated filter can install without machine room, with many advantages such as simple installation, convenient operation, excellent performance and saving construction cost. The filter is made according to Countries codes and standards.



FENTON® POOLS

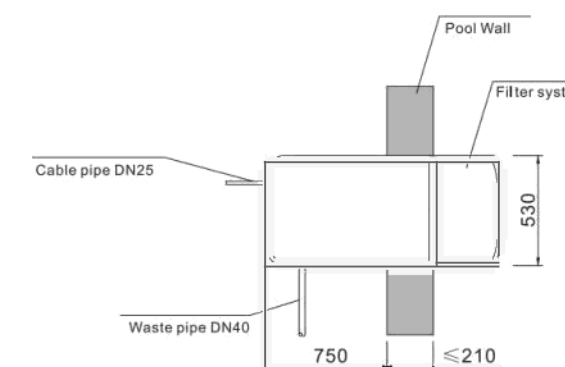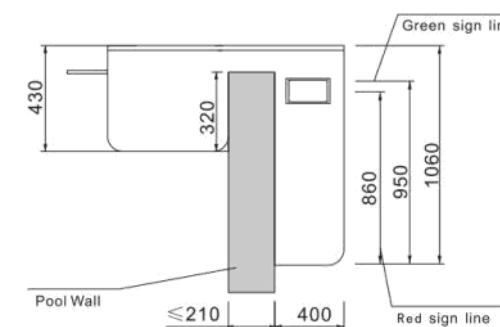

TECHNICAL CHARACTERISTICS	
Dimensions	1450x530x1060mm
Flow rate	25m³/h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	5u
Operating noise	< 50Db
Material	ABS
Installation	Wall mounted

EQUIPMENT	
Filtration Pump	1x2HP
Filtration basket with bag	1pc
Light	1x LED 12W/12V
Time controller	1pc
Swim jet	2pcs
Ozone	1pc

SYSTEM	
Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circulation system	1pc
Lighting system	1pc

Inground Filter




Quartz Sand Filter

Model: PK8017

The enclosure of inground filter is made of high quality fiberglass and polyvinyl chloride, which is strong and durable, rust-proof, low temperature resistance and anti-uv, etc. Equipped with filtering timing automatic control system and the automatic drainage system; easy to install, no need a special machine room.

Notes: Massage pump, salt chlorinator and automatic chlorine off-line feeder(Optional)

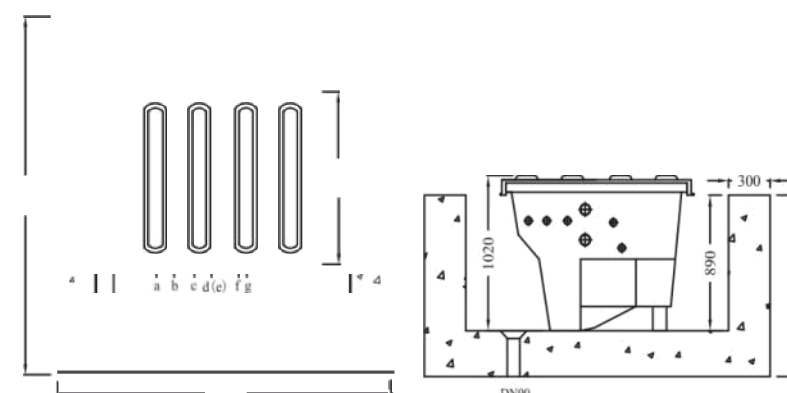

- a: Connect the water return inlet eso
- b: Connect vacuum suction eso
- c: Connect skimmer eso
- d: Connect the outlet of the massage pump es3
- e: Connect the inlet of the massage pump s63
- f: Connect the water outlet 650
- g: Connect the sewage outlet eso



Complete filtration
Complete circulation
Dose sterilization
Circulating water pump
Massage pump
Pressure relief valve
Pressure display
6-multi-port valve
Automatic doser
Time controller
Contactor

TECHNICAL CHARACTERISTICS

Power	1HP/220V	1.5HP/220V
Filter type	Sand filter	6525mm / O625mm
Flow rate	12m³/h	16m³/h
External Dimension	1400 X 1250 X 1020mm	
Disinfection	Sterilizer	
Water pump	120w/220v	
Salt chlorinator	16-42 /h	(options)
massage pump	PHP/220v	(options)
UV	65w/220v	(options)
CCOREL.250	(options)	




FENTON®
 PEOLS

Model: PK8018

The enclosure of inground filter is made of high quality fiberglass and polyvinyl chloride, which is strong and durable, rust-proof, low temperature resistance and anti-uv light, etc. Equipped with filtering timing automatic control system and the automatic drainage system; Easy to install, no need a special machine room.

Notes: Massage pump, salt chlorinator and automatic chlorine off-line feeder(Optional)

Quartz Sand Filter

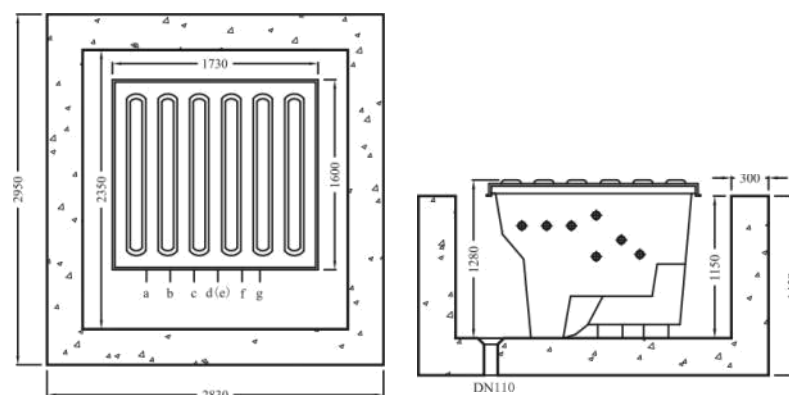

- a: Connect the water return inlet e50
- b: Connect vacuum suction e50
- c: Connect skimmer sso
- d: Connect the outlet of the massage pump e63
- e: Connect the inlet of the massage pump e63
- f: Connect the water outlet 650
- g: Connect the sewage outlet B50

TECHNICAL CHARACTERISTICS

Power	2HP/220V	3HP/220V
Filter type	Sand filter	6800mm / 6900mm
Flow rate	25m³/h	33m³/h
External Dimension	1730 x 1600 x 1280mm	
Disinfection	Sterilizer	
Water pump	120W/220V	
Salt chlorinator	16-42g/h	(options)
Massage pump	3HP/220V	(options)
CCOREL.250		(options)



Complete filtration
 Complete circulation
 Dose sterilization
 Circulating water pump
 Massage pump
 Pressure relief valve
 Pressure display
 6-multi-port valve
 Automatic doser
 Time controller
 Contactor

Quartz Sand Filter

FENTON®
 PEOLS

Model: PK8010


In-ground filter are made of fiberglass and polyvinyl chloride, which is design and good-looking and durable. The in-ground does not need a machine house, which save construction cost, convenient operation and save maintenance cost. Multic use in-ground sand filter assemble complete set filtration configuration to high filtering capacity and to reach to back wash. According with swimming pool specifications and standards.

NOTES: Ozone and heater(optional)




TECHNICAL CHARACTERISTICS

Power	1.5HP/220V	2.0HP/220V
Filter type	Sand filter	6625mm / 6700mm
Flow rate	16m³/h	21m³/h
External Dimension	1380 x 1180 x 1100mm	
Disinfection	Sterilizer	

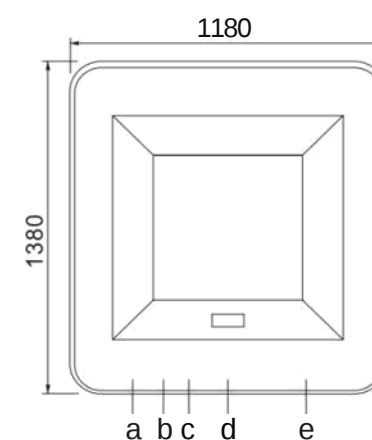

- a: Connected the water return inlet
- b: Connected skimmer
- c: Connected suction fitting
- d: Connected the recirculating water outlet
- e: Connected backwash

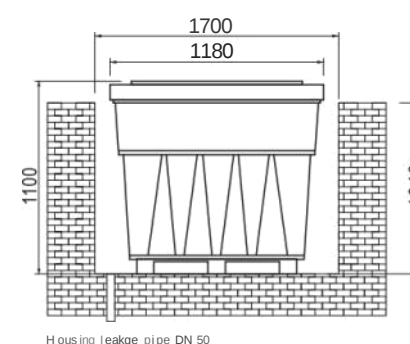

Housing leakage pipe DN 50

Complete filtration
 Complete circulation
 Dose sterilization
 Circulating water pump
 Pressure relief valve
 Pressure display
 6-multi-port valve
 Automatic doser
 Time controller
 Contactor




FENTON®
 POOLS

Model: PK8011

In-ground filter are made of fiberglass and polyvinyl chloride, which reasonable design and good-looking and durable. The in- ground does not need a machine house, which save construction cost, convenient operation and save maintenance cost. Multic use in-ground sand filter assemble complete set filtration configuration to high filtering capacity and to reach to back wash. According with swimming pool specifications and standards, it's the best choice for Big and commercail swimming pools.


NOTES: Ozone and heater(optional).

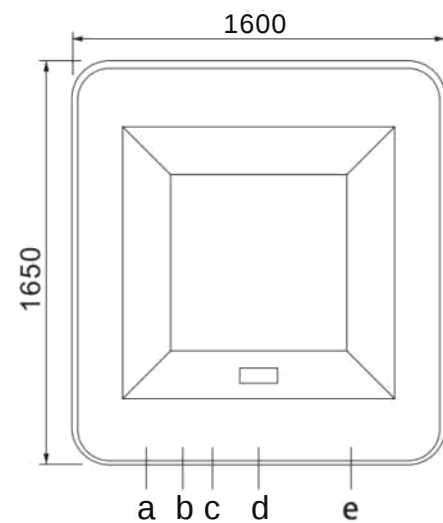


- a: Connected the water return inlet
 b: Connected skimmer
 c: Connected suction fitting
 d: Connected the recirculating water outlet
 e: Connected backwash

TECHNICAL CHARACTERISTICS

Power	2HP/220V	3HP/220V
Filter type	Sand filter	Ø800mm / Ø900mm / Ø1000mm
Flow rate	26m³/h	33m³/h 40.5m³/h
External Dimension	1650 • 1600 • 1260mm	
Disinfection	Sterilizer	

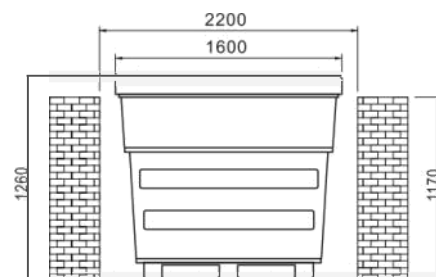Quartz Sand Filter

 DN50
 Housing leakage pipe DN50

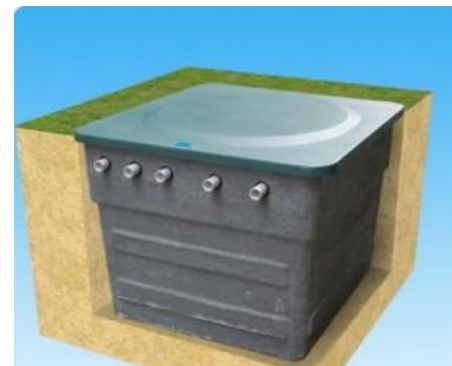Complete filtration
 Complete circulation
 Dose sterilization
 Circulating water pump
 Pressure relief valve
 Pressure display
 6-multi-port valve
 Automatic doser
 Time controller
 Contactor


Quartz Sand Filter
FENTON®
 POOLS


Model: PK8012

In-ground filter are made of fiberglass and polyvinyl chloride, which reasonable design and good-looking and durable. The in- ground does not need a machine house, which save construction cost, convenient operation and save maintenance cost. Multic use in-ground polyester fiber filter assemble complete set filtration configuration to high filtering capacity. According with swimming pool specifications and standards.


NOTES: Ozone and heater(optional)



TECHNICAL	STICS
Power	3HP/220V
Filter type	Polyester fiber 2 • 75ft*
Filtering Capacity	36m³/h
External Dimension	1380 • 1180 • 1200mm
Disinfection	Sterilizer

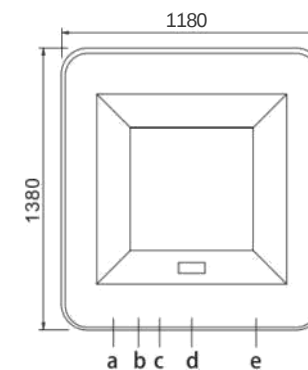

- a: Connect the water return inlet
 b: Connected skimmer
 c: Connected suction fitting
 d: Connected the recirculating water outlet

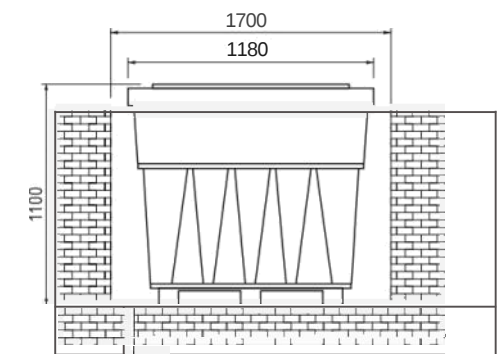

Housing leakage pipe DN50



 GL-002
 Time control box


FENTON®
 POOLS

Inground Filter

Model: PK8015

The enclosure of wall-mounted filter is made of high quality acrylic and fiberglass, so the filter is anti-acid anti-fading, and easy to clean. Integrated filter installation without room, simple installation, convenient operation, excellent performance, thereby reducing the construction cost. It's big flow rate for 8pcs filter bag.

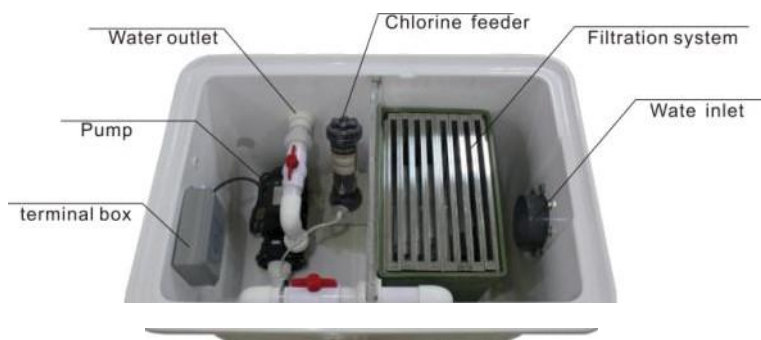

TECHNICAL CHARACTERISTICS


Dimensions	1370x1000x720mm
Flow rate	47m ³ /h
Voltage	220V / 50Hz or 60Hz
Precision of filtration bag	.5u
Operating noise	50Db
Material	Fiberglass / Acrylic
Installation	Inground

EQUIPMENT


Filtration Pump	1x4HP
Filtration basket with bag	8pcs
Chlorine feeder	1pc
Time controller	1pc
4" Connection inlet	1pc

SYSTEM

Filtration system	1pc
Disinfection system	1pc
Time control system	1pc
Circle system	1pc

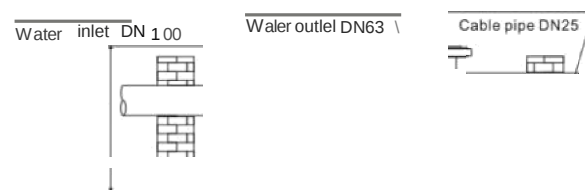

Housing leakage pipe a Dtd40

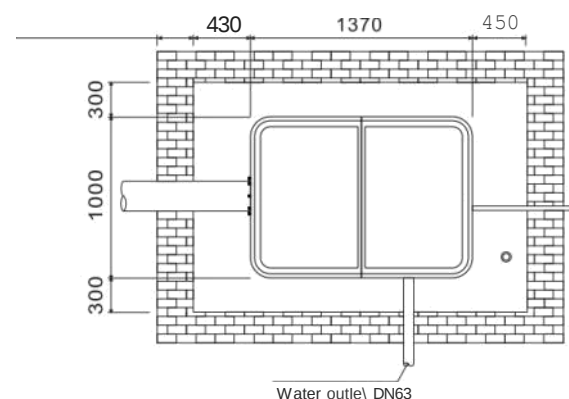


Quartz Sand Filter


Model: PK8015

In-ground filter are made of fiberglass and polyvinyl chloride, which reasonable design and good-looking and durable. The in-ground does not need a machine house, which save construction cost, convenient operation and save maintenance cost. Multic use in-ground sand filter assemble complete set filtration configuration to high filtering capacity and to reach to back wash. According with swimming pool specifications and standards, it's the best choice for Big and commercial swimming pools.

NOTES: Ozone and heater(optional).

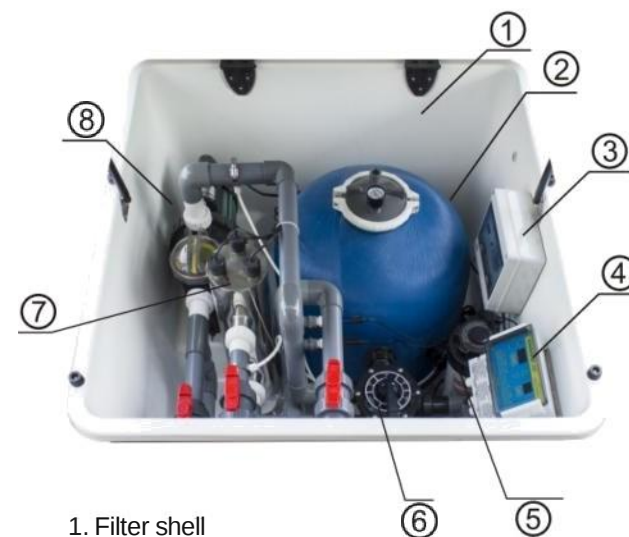


1. Filter shell
2. Sand filter
3. Junction box
4. Water quality controller
5. Chlorinator feeder
6. Submersible pump
7. UV sterilizer
8. Water pump

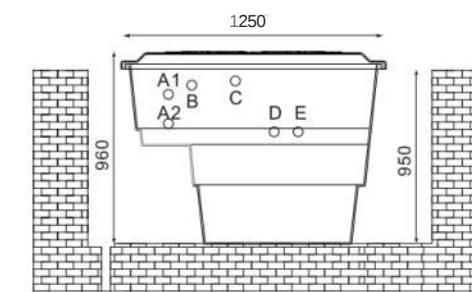

- A: Connect the water return inlet, suction fitting
 B: Connect the water outlet(after the water disinfection)
 C: Connect the water outlet(after the UV)
 D: Connect the water outlet(after the Submersible pump)
 E: Connect the water outlet(sand filter)

TECHNICAL CHARACTERISTICS

Power	1HP/220v	1.5HP/220v
Filter type	Sand filter	O525mm / 6625mm
Flow rate	12m ³ /h	16m ³ /h
External Dimension	1300x1250x960mm	
Disinfection	Sterilizer	
Water pump	120w, 220v	
Salt chlorinator	16-42 g/h	Optional
UV	6Sw/220v	Optional
CCOREL.250		Optional

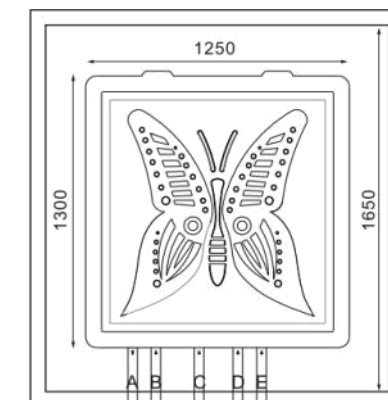


FENTON®
 POOLS

Quartz Sand Filter

Model: PK8016

In-ground filter are made of fiberglass and polyvinyl chloride, which reasonable design and good-looking and durable. The in- ground does not need a machine house, which save construction cost, convenient operation and save maintenance cost. Multic use in-ground polyester fiber filter assemble complete set filtration configuration to high filtering capacity. According with swimming pool specifications and standards.


NOTES: Ozone and heater(optional)

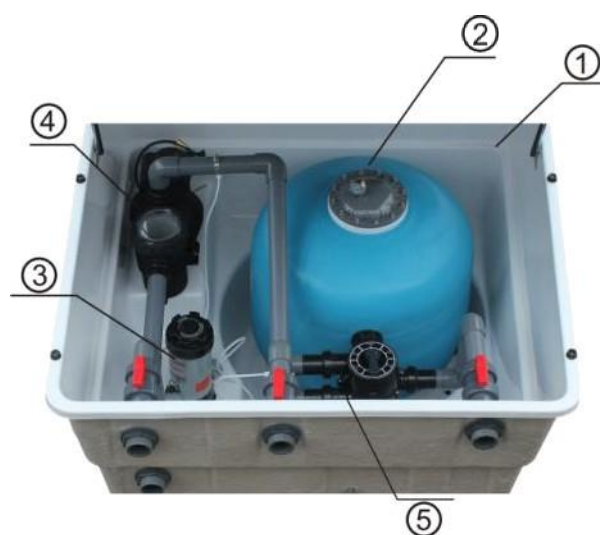

1. Filter shell
2. Sand filter
3. Chlorinator feeder
4. Water pump
5. Submersible pump

TECHNICAL CHARACTERISTICS

Power	2HP/220v	3HP/220v
Filter type	Sand filter	@800mm / 6900mm
Flow rate	25m³/h	33m³/h
External Dimension	1650x1700x1250mm	
Disinfection	Sterilizer	
Water pump	120w/ 220v	
Salt chlorinator	16-42 g/h	(optional)
UV	85w/220v	(optional)
CCOREL.250		(optional)

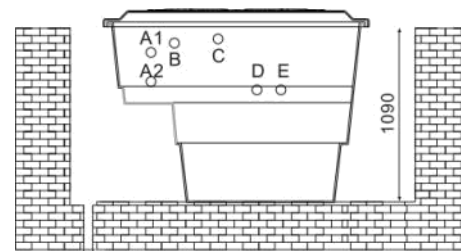


A: Connect the water return intel, sunction fitting

B: Connect the water outlet (after the water disinfection)

C: Connect the water outlet (after the uv)

D: Connect the water outlet (after the Submersible pump)

E: Connect the water outlet (sand filter)

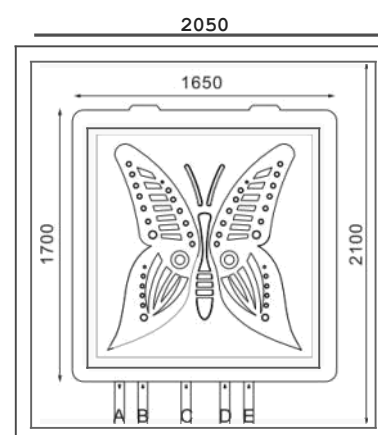


Quartz Sand Filter

FENTON®
 POOLS

Model: PK8013


The enclosure is made of high quality fiberglass and acrylic, which is strong and durable, rust-proof, low temperature resistance and anti-UV light, etc. Equipped with filtering timing automatic control system and the automatic drainage system; easy to install, no need a special machine room.

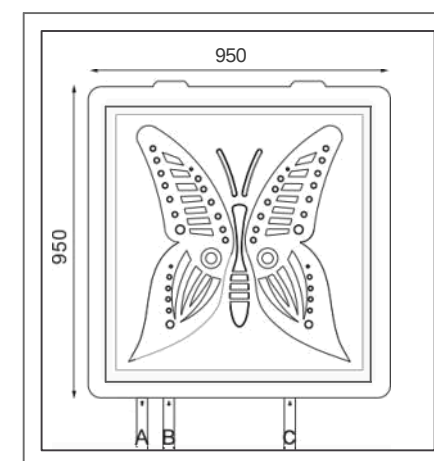

a: Connect the water return inlet

b: Connect the water outlet

c: Connect the sewage outlet

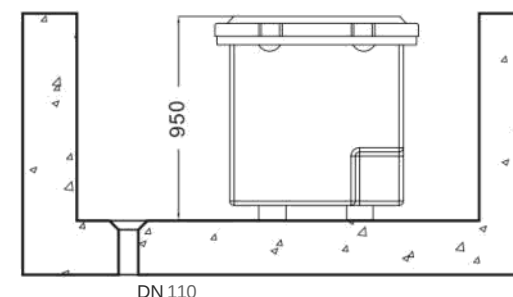

TECHNICAL CHARACTERISTICS

Power	0.5HP	0.75HP	1.0HP/220v
Filter type	Sand filter	6400mm / 4500mm	6525mm
Flow rate	8 m³/h	10 m³/h	12 m³/h
External Dimension	950x950x950mm		
Water pump	120w	220v	(options)
Disinfection	Sterilizer		

Complete filtration
 Complete circulation
 Ozone sterilization
 Circulating water pump
 Massage pump
 Pressure relief valve
 Pressure display
 6-multi-port valve
 Automatic doser
 Time controller
 Contactor

FENTON®
 POOLS

Quartz Sand Filter

Model: PK8027

The enclosure is made of high quality fiberglass and acrylic, which is strong and durable, rust-proof, low temperature resistance and anti-UV light, etc. Equipped with filtering timing automatic control system and the automatic drainage system; easy to install, no need a special machine room. Equipped with cartridge filter inside the box, easy to operate.




water inlet

Water outlet

 DN25
 Cable pipe DN25

1. Filter shell
2. Cartridge filtration
3. Chlorinator feeder
4. Water pump

A: Connect the water return inlet
 B: Connect the water return inlet
 C: Connect the water outlet
 O: Connect the water outlet (cartridge filtration)

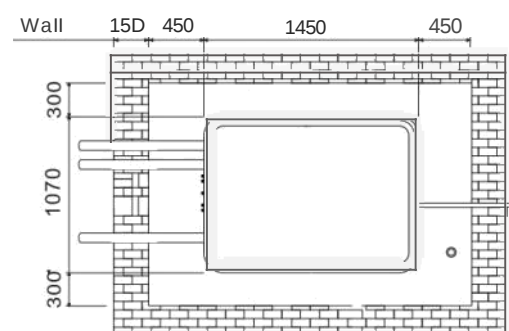

TECHNICAL CHARACTERISTICS

Power	3.0HP/220v
Filter type	Cartridge filtration AF50x3pcs
Flow rate	42m³/h
External Dimension	1450x1070x780 mm
Disinfection	Sterilizer
Water pump	120w, 220v (options)

Quartz Sand Filter

FENTON®
 POOLS

Model: PK803





A: Connect the water return inlet, suction fitting

D: Connected the recirculating water outlet

E: Connected backwash

Power	0.75HP/220V	1.0HP/220V
Filter type	Sand filter	6525mm
Flow rate	10m³/h	12m³/h
External Dimension	11BOX1100 X810mm	
Chlorine feeder	CL-100	1pc
Time Controller	1pc	

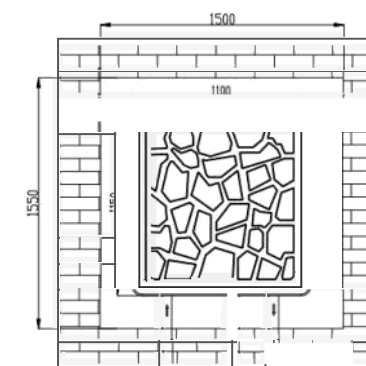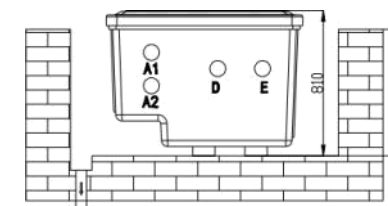

Model: PK8035B




A: Connect the water return inlet, suction fitting

D: Connected the recirculating water outlet

E: Connected backwash

Power	1.0HP/220V	1.5HP/220V
Filter type	Sand filter	B525mm / 6650mm
Flow rate	12m³/h	16m³/h
External Dimension	11BOX1100 X900mm	
Chlorine feeder	CL-100	1pc
Time Controller	1pc	

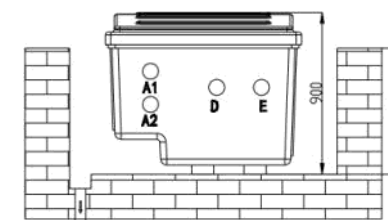

FENTON®
 POOLS

Pool Massage


Model: PK8031



PK-8031A

TECHNICAL CHARACTERISTICS

Model No.	PK8031 Pool massage		
Material	Acrylic		
Dimension	2600(L)x1600(W)x1200(H)mm		
Weight			
Color	Bone color		
Power	220V/50Hz		
Flowrate	25 m³/h		
Hydrotherapy system	jet 26pc	air jet : aop	s.s jet
	Circulating jet : 2pc	swim jet:1pc	
Filtering system	filter bag: 2pc		
	water return:2pc		
	water proof box:1200x1000x500mm		
Treatment	ozone: 1pc (500mg/h, 132W)		
Lighting	light: 2 x 18W		
Control panel	digital controller (options)		
	flow control valve (options)		
	air control valve (options)		
Pumps	filtration pump: 1 x 2HP (options)		
PK-8031A	massage pump: 2 x 3HP (options)		
	air blower: 1 x 900W (options)		
Approval	CE Certification		

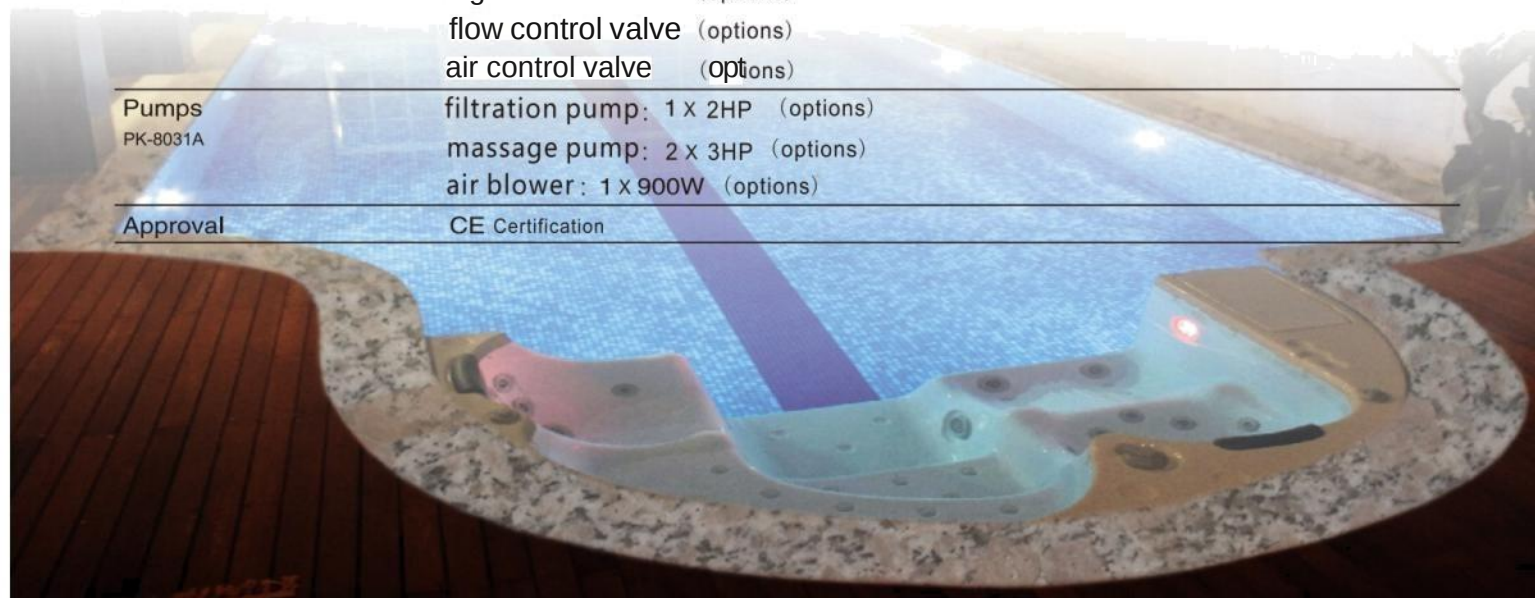
FENTON®
 POOLS

Sand Filter



FENTON®
 POOLS


“GFT” Series Top Mount Gel Sand Filter

GFT series tanks are non-corrosive gel-coated glass fiber tanks with smooth surface, which can adapt to different climates. The surface of the tank is treated with sun protection, which can operate in outdoor sunlight for a long time and it is suitable for residential and commercial swimming pools.



Highlight Features:

- Non-corrosive gel coated glass fiber tank
- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

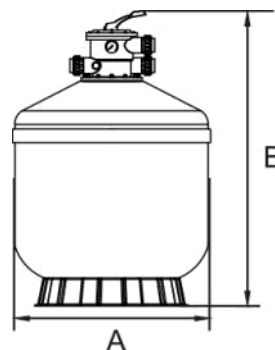

Technical Information

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Gravel (kg)	A (mm)	B (mm)
GFT500	0.20	1.5 inch	10.0 m³/h	88	535	900
GFT850	0.33	1.5 inch	16.5 m³/h	158	800	1000
GFT750	0.44	2 inch	22.0 m³/h	260	750	1200
GFT800	0.52	2 inch	28.0 m³/h	370	800	1280
GFT900	0.64	2 inch	32.0 m³/h	422	900	1330


“GFC” Series Side Mount Gel Sand Filter

GFC series tanks are non-corrosive gel-coated glass fiber tanks with smooth surface, which can adapt to different climates. The surface of the tank is treated with sun protection, which can operate in outdoor sunlight for a long time and it is suitable for residential and commercial swimming pools.



Highlight Features:

- Non-corrosive gel coated glass fiber tank
- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

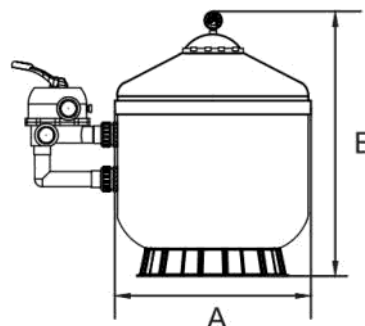

Technical Information

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Gravel (kg)	A (mm)	B (mm)
GFC500	0.20	1.5 inch	10.0 m³/h	100	525	790
GFC650	0.33	1.5 inch	18.5 m³/h	150	650	880
GFC750	0.44	2 inch	22.0 m³/h	250	750	1070
GFC800	0.50	2 inch	25.0 m³/h	350	800	1150
GFC900	0.64	2 inch	31.8 m³/h	375	900	1200

Note: Suggested weight of media is 1kg per 1m³ of filter area.

Quartz Sand Filter

FENTON®
 POOLS

S&SD Series Filters can withstand many years of prolonged exposure to sunlight. The UV-resistant one-piece blow-molded filter tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.

Highlight Features:


- 4-Way valve
- Max operating pressure 28psi/200k Pa
- Max temperature of 40°C (104°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm



S250-S300



SD250-SD300

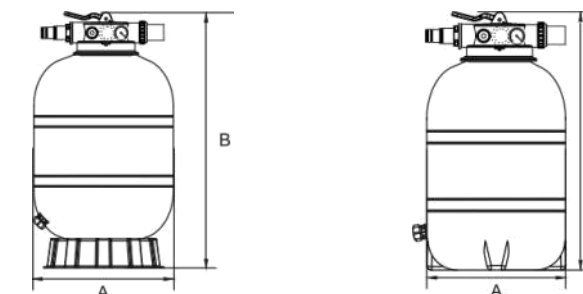


Technical Information

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Gravel (kg)	A (mm)	B (mm)
S250	0.06	1.5 inch	2.9 m³/h	14	250	540
S300	0.08	1.5 inch	3.5 m³/h	17	300	560
SD250	0.06	1.5 inch	2.9 m³/h	14	250	490
SD300	0.08	1.5 inch	3.5 m³/h	17	300	510

Note: Suggested weight of media is 1kg per 1m³ of filter area.

Functions 4 Way Multiport Valve

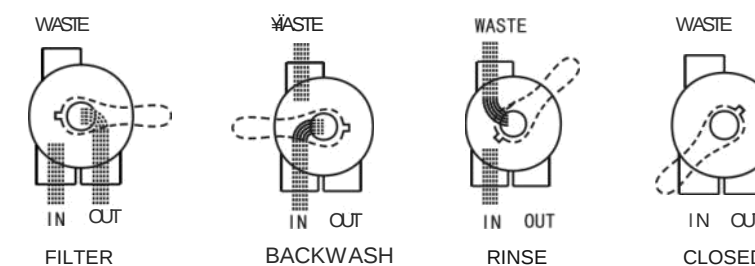


FENTON®
 POOLS

“PSY” Series Plastic Filter Combo

Highlight Features:

- 4-Way valve
- Max operating pressure 28psi/200kPa
- Max temperature of 40°C(104°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

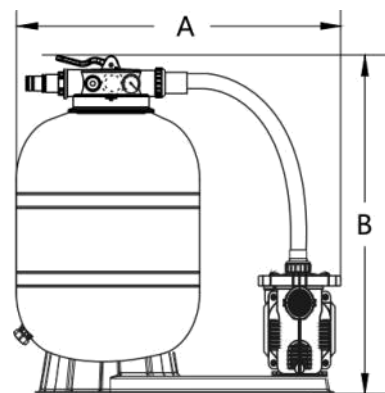

PSY Series Filters can withstand many years of prolonged exposure to sunlight. The UV-resistant one-piece blow-molded filter tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.

Technical Characteristics

Model	Max Flow Rate	Filter	Pump	valveConnections	sandm	A (mm)	B (mm)
PSY250-4W	2.9 m³/h	S250	0.33HP	1.5"/50mm	14	660	540
PSY300-4W	3.5 m³/h	S300	0.33HP	1.5"/50mm	17	660	560

Note: Suggested sand weight varies with differences in filter media size. For reference only.

“S” Series Top Mount Plastic Filter


FENTON®
 POOLS

S Series Filters can withstand many years of prolonged exposure to sunlight. The UV-resistant one-piece blow-molded filter tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.



Highlight Features:

- Tank Material HDPE
- Max operating pressure 28psi/200kPa
- Max temperature of 40°C(104°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

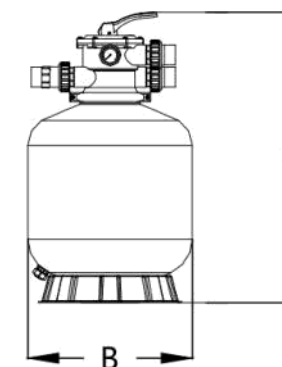

Technical Information

Model	Filter Area (ft²)	Valve Connections	Max Flow Rate Gravel (l/s)	A mm	B mm
S350	0.1	1.5 inch	4.32 m³/h	20	745
fg400	0.13	1.5 inch	6.12 m³/h	35	750
S450	0.16	1.5 inch	7.8 m³/h	45	815
Si525	0.22	1.5 inch	10.8 m³/h	85	B50
S650	0.31	1.5 inch	15.3 m³/h	145	915
SZ00	0.39	1.5 inch	19.20 m³/h	210	1010


SC Series Side Mount Plastic Filter

SC Series Filters can withstand many years of prolonged exposure to sunlight. The UV-resistant one-piece blow-molded filter tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.



Highlight Features:

- Tank Material HDPE
- Max operating pressure 28psi/200kPa
- Max temperature of 40°C(104°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm



Technical Information

Model	Filter Area (ft²)	Valve Connections	Max Flow Rate Gravel (l/s)	A mm	B mm
SC525	0.22	1.5 inch	10.8 m³/h	85	710
SC650	0.31	1.5 inch	15.3 m³/h	145	800
SC700A	0.39	1.5 inch	19.20 m³/h	210	870



FENTON®
 PCSLS

“PYS” Series Plastic Filter Combo

PSY Series Filters can withstand many years of prolonged exposure to sunlight. The UV-resistant one-piece blow-molded filter tank has been well-received by the industry, not only because of the durability of the material, but also due to its reliable performance and economy.

Highlight Features:

- 4/6-Way valve
- Max operating pressure 28psi/200kPa
- Max temperature of 40°C(104°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm



Technical Characteristics

Model	Max Flow Rate	Filter	Pump	valve Connection	Sandy	A (mm)	B (mm)
PSY350-4W	4.32m³/h	S350	0.33HP	1.5"/50mm	20	685	645
PSY400-4W	6.12m³/h	S400	0.50HP	1.5"/50mm	35	710	650
PSY450-4W	7.80m³/h	S450	0.75HP	1.5"/50mm	45	770	745
PSY500-4W	10.80m³/h	S525	1.0HP	1.5"/50mm	85	810	750
PSY650-4W	15.30m³/h	S650	1.2HP	1.5"/50mm	145	950	850
PSY350-6W	4.32m³/h	S350	0.33HP	1.5"/50mm	20	685	745
PSY400-6W	6.12m³/h	S400	0.50HP	1.5"/50mm	35	710	750
PSY450-6W	7.80m³/h	S450	0.75HP	1.5"/50mm	45	770	845
PSY500-6W	10.80m³/h	S525	1.0HP	1.5"/50mm	85	810	850
PSY650-6W	15.30m³/h	S650	1.2HP	1.5"/50mm	145	950	950

Note: Suggested sand weight varies with differences in filter media size. For reference only.

“P” Series Fiberglass Top Mount Filter

FENTON®
 PCSLS

Bobbin-wound fiberglass reinforced tank is still the most popular standard in the industry after all. With UV-resistant surface finished, it is able to operate under prolonged sunlight for years of reliability. P series (P400-P1400) filters are equipped with a six-position, clamp and screw styles multi-port valve and ABS laterals.



P400-700 PQ400-700




P750-1400



PV01-1/PV02-2



PS03-3/PS04-4



Highlight Features:


- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

Technical Characteristics

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Gravel Size (mm)	A (mm)	B (mm)
P400	0.13	1.5inch	10m³/h	35	720	400
P450	0.16	1.5inch	10m³/h	45	770	450
PS2S	0.22	1.5inch	12m³/h	85	840	520
P625	0.30	1.5inch	16m³/h	150	960	625
P700	0.40	2.0inch	20m³/h	210	1040	700
P700B	0.40	2.0inch	21m³/h	215	1080	700
P750	0.45	2.0inch	23m³/h	300	1100	750
P800	0.50	2.0inch	25m³/h	355	1210	800
P900	0.64	2.0inch	31m³/h	470	1270	900
P1000	0.79	2.0inch	36m³/h	620	1360	1000
P1100	0.68	2.0inch	42m³/h	800	1400	1100
P1200	1.13	2.0inch	45m³/h	900	1420	1200
P1400	1.54	2.0inch	56m³/h	1350	1750	1400

Note: For reference only.

Functions 6-way Multiport Valve

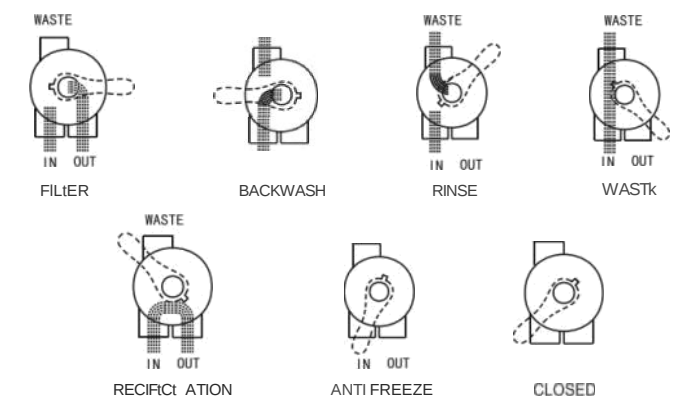

Size	1.5" Top mount	2.0" Top mount	1.5" Side mount	2.0" Side mount


FENTON®
 Pools

“PS” Series Fiberglass Side Mount Filter



PS525-700

Bobbin-wound fiberglass reinforced tank is still the most popular stand ard in the industry after all. With UV-resistant surface finished, it is able to operate under prolong sunlight for years of reliability. “PS”series filters are equipped with a six position, clamp and screw styles multi-port vale and ABS laterals.

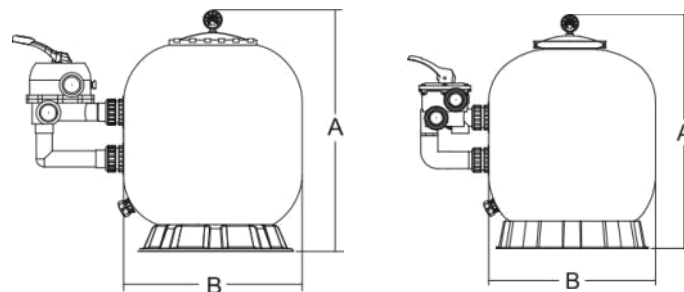

PS750-1400

Highlight Features:


- Max operating pressure 36psi/2.5bar
- Max temperature of 43°(109°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm

Technical Characteristics

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Orifice (mm)	A (mm)	B (mm)
PS525	0.22	1.5inch	50mm	12 m³/h	85	690 525
PS625	0.30	1.5inch	50mm	16 m³/h	150	790 625
PS700	0.40	1.5inch	50mm	20 m³/h	210	890 700
PS700B	0.40	2.0inch	63mm	21 m³/h	215	930 700
PS750	0.45	2.0inch	63mm	23 m³/h	300	050 750
PS800	0.50	2.0inch	63mm	25 m³/h	355	1060 800
PS900	0.64	2.0inch	63mm	31 m³/h	470	1120 900
PS1000	0.70	2.0inch	63mm	36 m³/h	620	1210 1000
PS1100	0.96	2.0 inch	63mm	42 m³/h	800	1290 1100
PS1200	1.13	2.0inch	63mm	45 m³/h	800	1310 1200
PS1400	1.54	2.0inch	63mm	56 m³/h	1350	1600 1400

Note: For reference only

PS525-700



PS750-1400



“PS” Series Fiberglass Side Mount Filter

FENTON®
 Pools




PS Series Commercial Sand Filter satisfies the demand of different water treatment including pool s installed within-floor cleaning systems spa, fountains and public swimming pool.

Highlight Features:

- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Universal standard of Union connection provided
- Suggested size of media: 1-2mm



PS1200-2350



water inlet



water outlet

Technical Characteristics

Model	Filter Area (m²)	Valve Connection	Max Flow Rate (m³/h)	Orifice (mm)	A (mm)	B (mm)
PS1200	1.13	3.0inch	60mm	55m³/h	900	1410 1200
PS1400	1.54	3.0inch	90mm	76m³/h	1350	1570 1400
PS1800	2.06	4.0inch	110mm	100m³/h	2300	1740 1600
PS1800	2.06	4.0inch	110mm	120m³/h	2900	2040 1600
PS2000	2.97	6.0inch	160mm	145m³/h	4000	2210 2000
PS2300	4.43	8.0inch	200mm	210m³/h	6000	2510 2300
PS2350	4.43	8.0inch	200mm	210m³/h	6000	2510 2300

Note: For reference only


4/5 Way Butterfly Valve


 PA-01
 4 Way butterfly valve

Maximum Working Pressure: 250kPa/36psi/2.5bar
 Factory Testing Pressure: 400kPa/58psi/4.0bar
 Maximum Water Temperature: 43° C (109° F)


 PA-02
 5 Way butterfly valve

SL Series Side Mount Deep Bed Filter offers a more thorough filtration with the standard of either 1.0m or 1.2m deep sand bed which is suitable for high filtration performance of domestic swimming pool.




Lateral system



Man hole

Highlight Features:

- 1-Way valve
- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Universal standard of union connection provided
- Suggested size of media: 1–2 mm

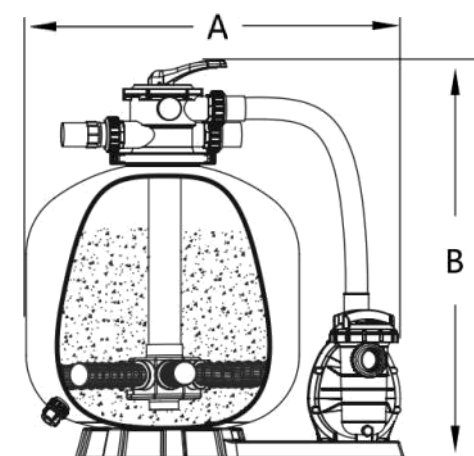

Highlight Features:

- Max operating pressure 36psi/2.5bar
- Max temperature of 43°C (109°F)
- Maximum filtration velocity: 50m/h/m
- Universal standard of union connection provided
- Suggested size of media: 1-2mm
- Dual layers of laterals
- 4" Sight glass
- 1.58mm manhole for servicing
- 2" bottom drain

Technical Characteristics


Model	Filtration Area (m ²)	Valve Connection	Max Flow Rate	Gravel (kg)
SL700-1.0	0.38	1.5 inch 5Gmm	253lpm 1520m ³ /h	700
SL700-1.2	0.38	1.5 inch 5mm	253lpm 15.20m ³ /h	696
SL800-1.0	0.50	2.0 inch 63mm	333lpm 20.00m ³ /h	769
SL800-1.2	0.50	2.0 inch 63mm	333lpm 20.00m ³ /h	814
SL900-1.0	0.63	2.0 inch 63mm	420lpm 25.2m ³ /h	957
SL900-1.2	0.63	2.0 inch 63mm	420lpm 25.2m ³ /h	1146
SL1000-1.0	0.78	2.0 inch 63mm	520lpm 31.20m ³ /h	1204
SL1000-1.2	0.78	2.0 inch 63mm	520lpm 31.20m ³ /h	1438

Designed for easy set-up domestic pool, “PSF” Series filtration combo offers the right solution for home user who is looking for user-friendly and excellent filtration performance. PSF Series Filtration Combo includes top mount fiberglass filter tank, multiport valve, swimming pool pumps attached with base.

Technical Characteristics

Model	Max Flow Rate	Filter	Pump	Valve Connections	Sand (kg)	A (mm)	B (mm)
PSF400-6W	6.48m ³ /h	P400	0.50HP	1.5inch 50mm	35	780	520
PSF450-6W	8.10m ³ /h	P450	0.75HP	1.5inch 50mm	45	820	555
PSF525-6W	11.1 m ³ /h	P525	1.0HP	1.5inch 50mm	85	880	630
PSF625-6W	15.6 m ³ /h	P625	1.2HP	1.5inch 50mm	150	1010	740

Note: Suggested sand weight varies with differences in filter media size. For reference only

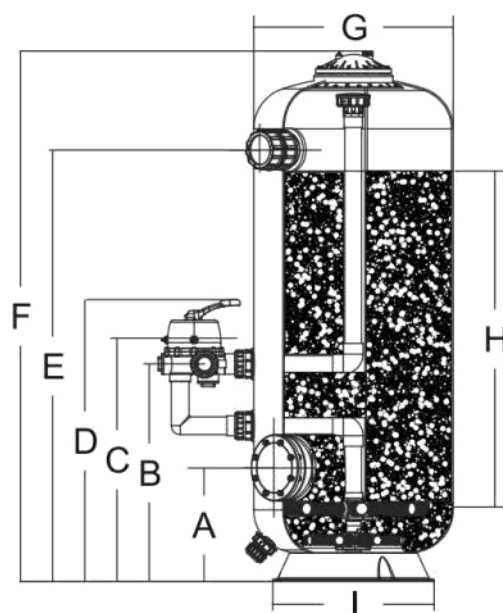

SL700-4.0	388	7SB	844	987	1820	1672	700	1000	576
SL700-4.2	388	7SB	844	987	1820	1672	700	1000	576
SL800-4.0	422	7SB	844	987	1820	1672	700	1000	576
SL800-4.2	422	7SB	844	987	1820	1672	700	1000	576
SL900-4.0	422	7SB	844	987	1820	1672	700	1000	576
SL900-4.2	422	7SB	844	987	1820	1672	700	1000	576
SL1000-4.0	422	7SB	844	987	1820	1672	700	1000	576
SL1000-4.2	422	7SB	844	987	1820	1672	700	1000	576

Note: Suggested sand weight varies with differences in filter media size. For reference only

Cartridge filtration is an effective trouble-free proven method of filtration. Pool water enters the filter and passes through a polyester single element cartridge. Suspended particles are trapped and the water is returned to the pool. As the build-up of dirt in the element increases, so the water pressure rises and the flow decreases. When the pressure reaches an unacceptable level the element must be removed and cleaned.



AF Cartridge Filter

Technical Characteristics								Package Dimensions			
Model	High (mm) A	High (mm) B	Diameter (mm) C	Pump selection range I)	Filter area (m ²)	Flow (m ³ /h)	Neatest pessu/e (kpa)	Long mm	Width mm	High mm	Weight kg
AF25	445	387	225	250-370	2.25	5.5	350	320	320	510	5.85
AF50	625	567	225	550-750	4.63	11.4	350	320	320	690	7.35
AF75	805	747	225	750-1100	7.00	17.0	350	320	320	860	9.05
AF100	985	927	225	1100-1500	9.38	22.9	350	320	320	1045	10.8
AF150	1165	1107	225	1100-2200	13.72	33.4	350	320	320	1220	12.6

AF Cartridge

Model	Core diameter (mm)	Caliber (mm)	High (cm)	Filter material	Filtration accuracy (μm)
AF25	6183	678	18.45	with precision polyester fiber fabric	≤15
AF50	@183	@78	36.45		
AF75	@183	@78	54.45		
AF100	e1s3	e7s	72.45		
AF150	6183	678	90.45		



PD01

The crystal sand filter material can effectively reduce the frequency of electric backwashing and save the number of water use; it has more advantages than quartz sand. Higher wear resistance, longer service life, not easy to break. No biofilm will be formed, and the surface area is 300 times larger than that of sand; suitable for use for filtration of gymnasium swimming pools, dedicated to marine aquariums, private villa swimming pools, and children's water parks.

Technical Characteristics	
Size (mm)	Weight (kg/bag)
0.5-0.8	25
1.0-2.0	25
3.0-4.0	25


Diatomaceous Earth Integrated Filter




- Multi-media filtration performance & adaptability (diatomaceous earth and perlite);
- 0.5 NTU effluent quality / leading efficiency, variable pulse back washing technology, and reconstruction of industry technical barriers;
- Systems: filter operation & monitoring, backwashing & filtration controller system, medium storage & dosing system, auto maintenance system, auto remote control system, the synergy leads the industry in synergy.

Technical Characteristics					
Model	Filter	Number of Filter Rods (pcs)	Filter Area (m ²)	Flow Rate (m ³ /h)	Valve Connections
PLG20	P350	48	4	20	DN50
PLG30	P450	108	8.8	30	DN50
PLG40	P500	155	12.5	40	DN65

NEW "PB" series heavy duty pump delivers high flow and energy efficiency ultra performance. It is suitable for commercial swimming pool. 2 inch suction. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.

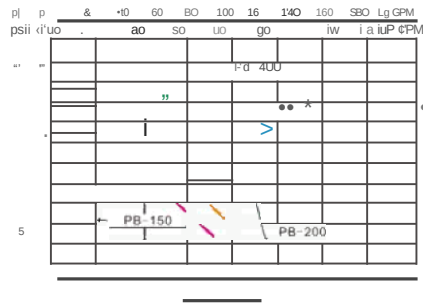

overall dimension

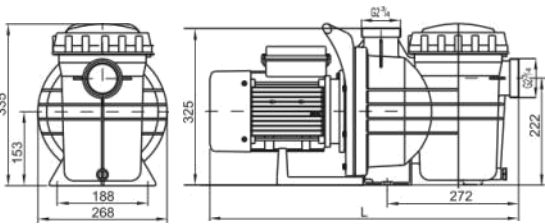


Technical Characteristics


	HP	NP					
PB-120	0.9	1.2	350	12.5	220/50	60.3or63	675x315x420
PB-150	1.1	1.5	380	15.5	220/50	60.3or63	675x315x420
PB-200	1.5	2.0	500	20	220/50	60.3or63	675x315x420
PB-300	2.2	3.0	600	22	220/50	60.3or63	675x315x420
PB-300	2.2	3.0	600	22	380/50	60.3or63	675x315x420
PB-400	3.0	4.0	650	25	380/50	3	700x315x420

NEW "PC" Series Pump

NEW "PC" series swimming pool pump is designed for medium head installation in medium or domestic pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and easy maintenance.

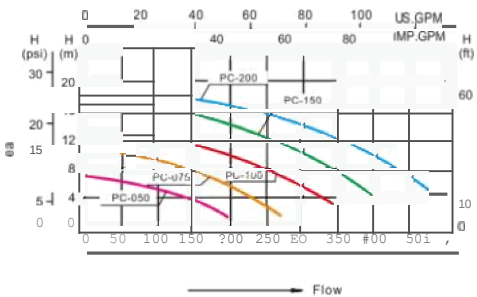

overall dimension


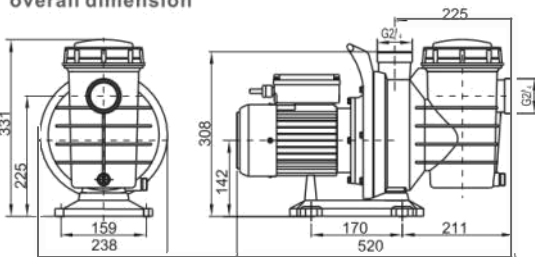


Technical Characteristics

New Model	KW	HP	(l/min)	(m)	(V/Hz)	(mm)	(mm)
PC-050	0.37	0.5	195	7	220-240/50	48.5or50	575x275x405
PC-075	0.55	0.75	255	10	220-240/50	48.5or50	575x275x405
PC-100	0.75	1.0	340	12.5	220-240/50	48.5or50	575x275x405
PC-150	1.1	1.5	390	17.5	220-240/50	48.5or50	575x275x405
PC-200	1.5	2.0	470	18.5	220-240/50	48.5or50	575x275x405





“PC” series swimming pool pump is designed for medium head installation in medium or domestic pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and easy maintenance.

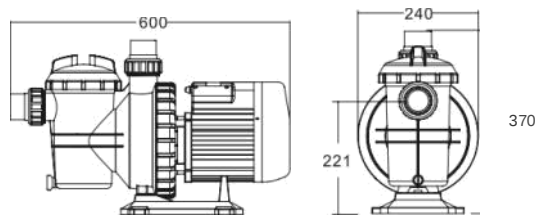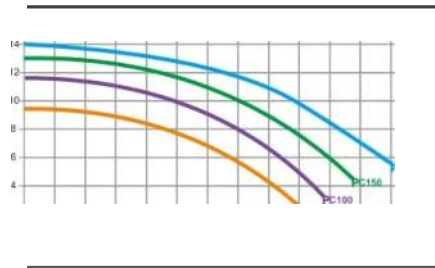

Model	Input power (KW)	Horse power (HP)	Port size (inch / mm)	Weight (kg)
PC100	0.75	1.0	1.5T50	13.40
PC150	1.10	1.5	1.5/50	14.9T
PC200	1.50	2.0	1.5 50	15.40





“PR” series heavy duty pump delivers high flow and energy efficiency ultra performance. It is suitable for commercial spa pool. 2 inch suction and discharge port with transparent lid. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.

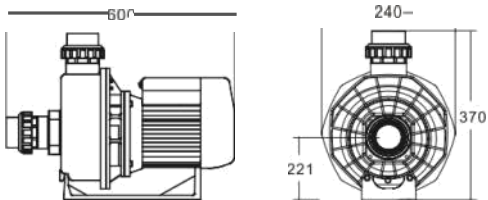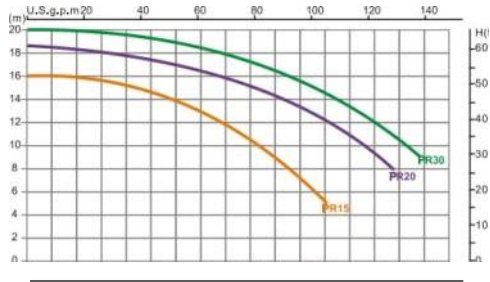



Model	Input power (KW)	Horse power (HP)	Port size (inch / mm)	Weight (kg)
PR15	1.10	1.5	2.0 / 63	16.30
PR20	1.50	2.0	2.0 / 63	19.70
PR30	2.20	3.0	2.0 / 61	22.10





“PB” series heavy duty pump delivers high flow and energy efficiency ultra performance. It is suitable for commercial swimming pool. 2 inch suction and discharge port with transparent lid. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.

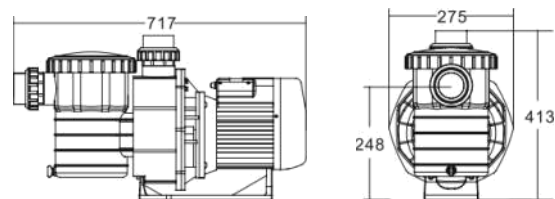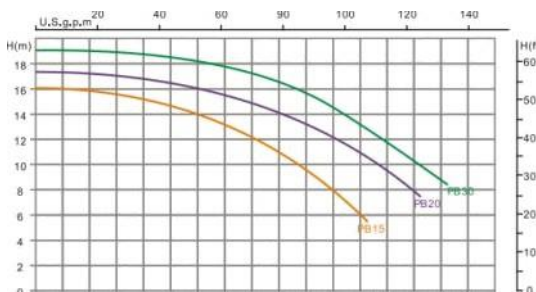

Model	Input power (KW)	Horse power (HP)	Port size (inch / mm)	Weight (kg)
PB15	1.10	1.5	2.0 / 63	17.00
PB20	1.50	2.0	2.0 / 63	23.00
PB30	2.20	3.0	2.0 / 63	24.00

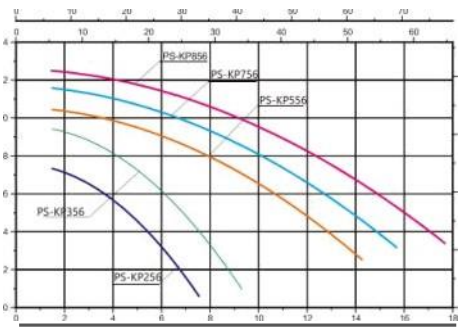



Model	Qmax (l/min)	Hmax (m)	Voltage		Input power		Port size
PSh P256	12"	7.5	220-240	50	0.25	0.33	1.5 inch
PS-KP355	160	9.5	220-240	50	0.35	0.50	1.5 inch
PS-KPSSG	235	12	220-240	50	0.55	0.75	1.5 inch
PS-KP7SG	260	12.5	220-240	50	0.75	1.00	1.5 inch
i'S-KI"66	27"E	12.5	220-240	50	0.85	1.20	1.5 inch

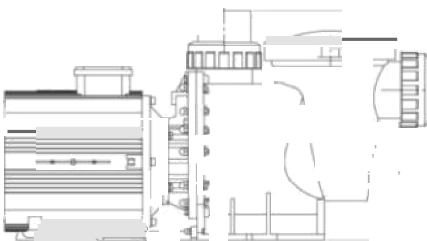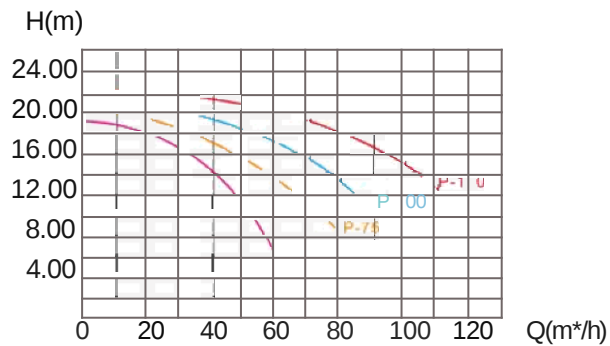

Technical Characteristics

Model	Qmax (m³/h)	Hmax (m)	Voltage (V/Hz)	Power		Inlet øD (inch)	Outlet øE (inch)
				KW	HP		
P-55	60	19	380/50	4	5.5	3.0"/90mm	3.0"/90mm
P-88	85	21	380/50	7.5	10	3.0"/90mm	3.0"/90mm
P-150	110	22	380/50	15	20	3.0"/80mm	3.0"/80mm



FD Series Pump

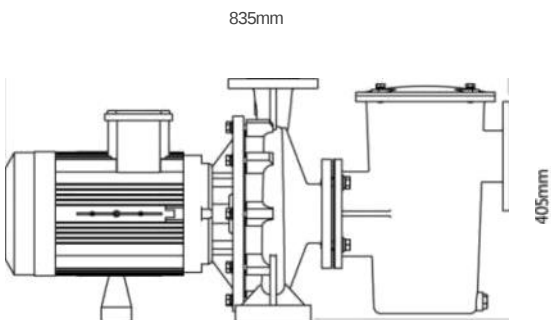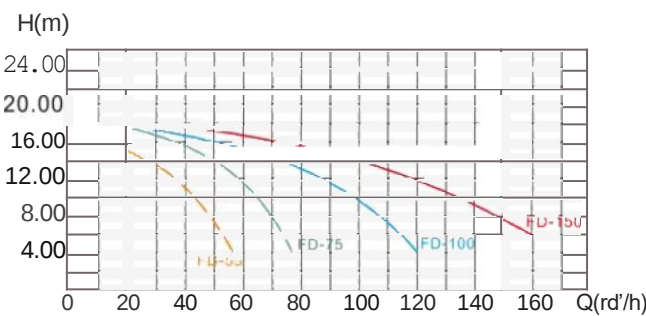

Technical Characteristics

Model	Qmax (m³/h)	Hmax (m)	Voltage (V/Hz)	inlet flange (mm)	outlet flange (mm)	Inlet øD (inch)	Outlet øE (inch)
FD-55	60	18	380/50	4-M12Ø90	4-Ø18Ø75	Φ 86	Φ 63
FD-75	75	18	380/50	4-M12Ø90	4-Ø18Ø75	Φ 86	Φ 63
FD-100	120	18	380/50	8-Ø18Ø110	4-Ø18Ø90	Φ 100	Φ 80
FD-150	160	18	380/50	8-Ø18Ø110	4-Ø18Ø90	Φ 100	Φ 80

WQ Series Pump

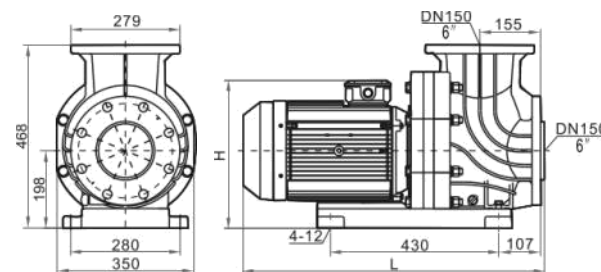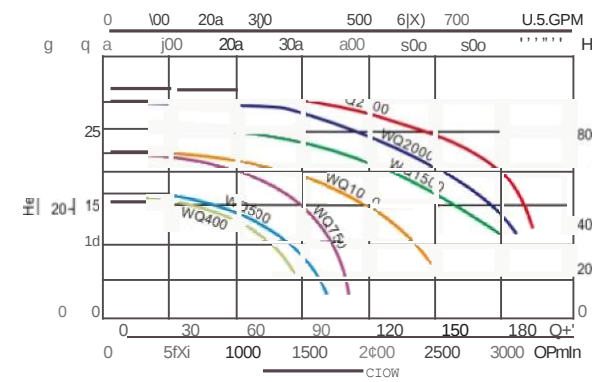

Technical Characteristics

Model	Qmax (l/min)	Hmax (m)	Voltage (V/Hz)	Power (KW/HP)	Current (Amps)	Inlet/outlet
WQ-400	1480	16	380/50	5.0/4	5.9	DN150(6")
WQ-500	1680	17	380/50	5.5/4	6.8	DN150(6")
WQ-750	1830	22	380/50	7.5/10	10.3	DN150(6")
WQ-1000	2560	22	380/50	7.5/10	12.7	DN150(6")
WQ-1500	3000	26	380/50	11/15	20.1	DN150(6")
WQ-2000	3100	29	380/50	15/20	28.7	DN150(6")
WQ-2500	3300	31	380/50	18.5/25	30.3	DN150(6")







Perfect for small pools where space is limited.
Excellent for fitness training, underwater massage,
endless no-lap swimming and unnecessary tumble
turns.

Product Features

- * Powerful counter current.
- * Product can be used in a single or double jet system with one or two pumps.
- * Counter current surface plate with LED light.
- * Counter current control plate with switch, can be operated in the water perfectly safely. Adjust the valve to control the bubble effect. Water flow direction can be changed through the adjustable nozzle.


Characteristics

		4	780	19	220V/50HZ
PK1000	LEO/White	4	7900	13	380V/50HZ
		5.5	1500	17.5	380V/50HZ

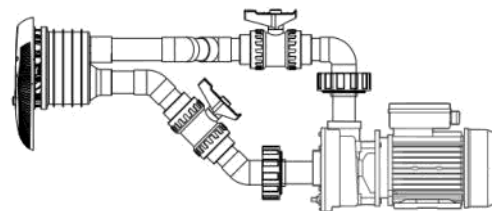

Pump

Installation of Counter Current Jet



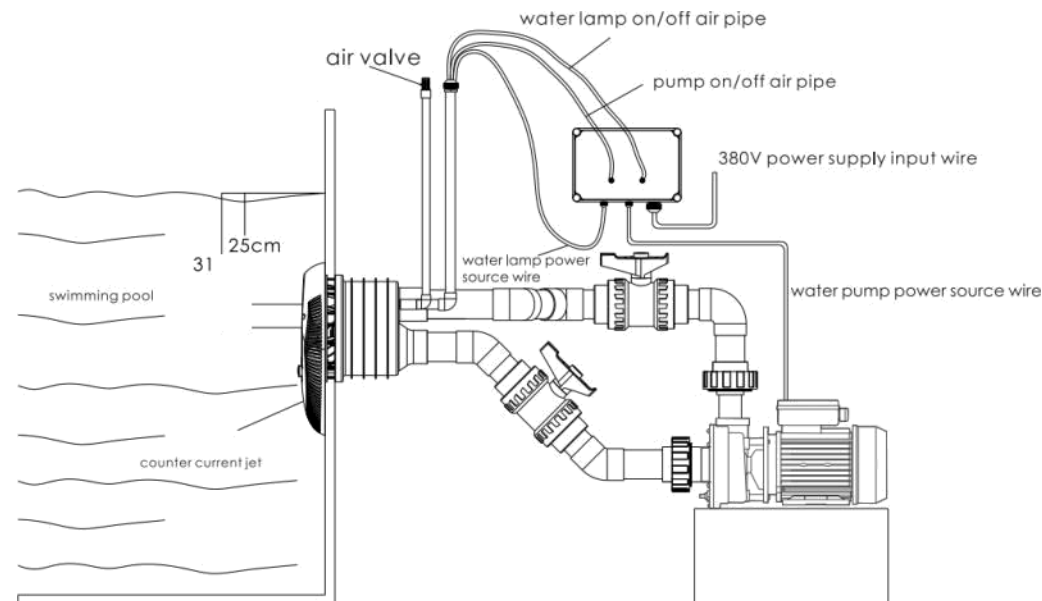


Swim jet PK2000

- Jet Swim 2000 housing made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting on concrete, wood or prefabricated board walls.
- Pump power: 2.18KW/3HP
- Control box including contactor and overload protection
- Air mixture control
- Air mixture hose
- Hose connectors
- Hose clamps
- Hose for suction and pressure
- Valves

Technical Characteristics

Model	Power (KW)	Voltage (V)	Pump Connection (mm)	Water Capacity (L/Min)	Jet Material
Ph2000	2.18	220	m63	35	stainless steel






Swim Jet PK3000 Swimming Counter Current Trainer



Swim jet PK3000

- Jet Swim 3000 housing made of stainless steel and the rear scaffold made of copper, front and handle made of polished acid-proof stainless steel AISI 304. For mounting on concrete, wood or prefabricated board walls.
- Pump power: 3KW/4HP
- Control box including contactor and overload protection
- Air mixture control
- Air mixture hose
- Hose connectors
- Hose clamps
- Hose for suction and pressure
- Valves

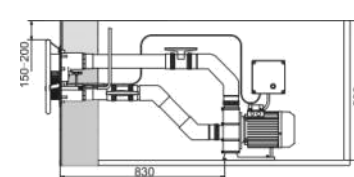

WP-4HP/220v/380v





Technical Characteristics

Model	Power (KW)	Voltage (V)	Pump Connection (mm)	Water Capacity (m³/H)	Jet Material
PK3000	3	220/380	eT5	39/7'	Stainless steel


Underwater Light Series





PK8100



Torrent pump 2.8kW/380V
(with control system) 1pcs
Automatic drainage pump 1pcs

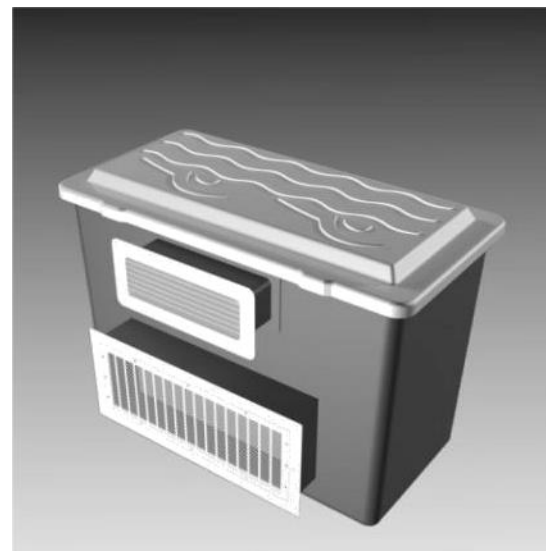

PK8000

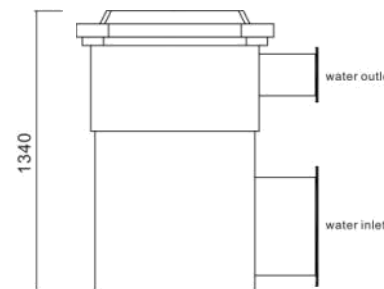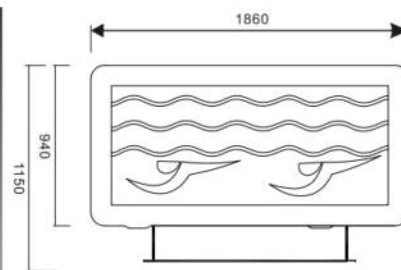

Torrent pump 2.8kW/280V
(with control system) 1pcs
Sand filter P400 2pcs
Circulating water pump
(STP100 1HP/220V) 2pcs
Automatic drainage pump 1pcs

The propulsion system is made of high-density fiberglass and acrylic materials, high load and high temperature operation, more reliable. As a new-generation swimming machine developed, it's a device for infinity swimming, turning the small pool into an endless pool. Through a special hydraulic pushing device, a directional water flow is formed and pushed to the swimmer to achieve the purpose of exercise.

Model	Power (KW)	foliage(V)	Packing size(mm)
PK8100	28	380	1200x980x1300
PK8000	2.8	380	1860x1150x 340



FENTON®
 PCSLS

Underwater Light Series



180mm

PK6001S Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.5mm²x1.5m
(White color/Auto color change)

Waterproof standard: IP68
Available: LED 6x1W / 12V



60mm

230mm

Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.5mm²x1.5m
Waterproof standard: IP68
white color/Auto color change)

Available :
1. 144 LED Bulbs 12W/12V
2. LED 6x1W/12V
3. LED 9x1W/12V
4. LED 12x1W/12V



70mm

280

PK6001 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 2x1.5mm²x1.5m

1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
4. LED 18x1W/12V
5. LED 24x1W/12V


PK6002 Wall mounted type pool light

Material: ABS+UV
Waterproof standard: IP68
Available:

1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)


Cable: 2x1.5mm²x1.5m

2. LED 12x1W/12V
3. LED 18x1W/12V
4. LED 24x1W/12V


PK6003S Wall mounted type pool light

Material: ABS+UV
Cable: 3x1.5mm²x1.5m
1. 144 LED Bulbs 12W/12V
2. LED 6x1W/12V
(White color/Auto color change)


Waterproof standard: IP68
Available:
3. LED 9x1W/12V
4. LED 12x1W/12V


PK6004 Wall mounted type pool light

Material: ABS+UV
Available:
1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
3. 432 LED Bulbs 35W/12V
(White color/Auto color change)

Cable: 2x1.5mm²x1.5m
Waterproof standard: IP68
4. LED 12x1W/12V
5. LED 18x1W/12V
6. LED 24x1W/12V

Underwater Light Series

FENTON®
 PCSLS


180mm

PK6005 Wall mounted type pool light

Material: ABS+UV
Cable: 2x1.5mm²x1.5m

1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
3. LED 12x1W/12V
4. LED 18x1W/12V


PK6006 Wall mounted type pool light

Material: ABS+UV
Cable: 2x1.5mm²x1.5m
1. Bulbs 12W/12V
2. Bulbs 18W/12V
3. Bulbs 25W/12V

Waterproof standard: IP68
(White color/Auto color change)



160



PK6007 Wall mounted type pool light

Material: ABS+UV
Waterproof standard: IP68
Available:

1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)

Cable: 2x4mm²x1.5m

5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 28x3W 35W/12V


PK6016 Buried type pool light

Material: ABS+UV
Cable: 2x4mm²x1.5m
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)

Waterproof standard: IP68

5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 18x3W 35W/12V


PK6007 Wall mounted type pool light

Material: ABS+UV
Cable: 2x1.5mm²x1.5m
1. 144 LED Bulbs 12W/12V
2. 252 LED Bulbs 25W/12V
(White color/Auto color change)

Waterproof standard: IP68
Available:
3. LED 12x1W/12V
4. LED 18x1W/12V


PK6009 Wall mounted type pool light

Material: 304 Stainless steel+ABS+UV
Cable: 2x1.5mm²x1.5m
1. 8 Bulbs 12W/12V
2. 8 Bulbs 18W/12V

Waterproof standard: IP68
(White color/Auto color change)




160


PK6017V Buried type pool light (for liner pool)

Material: ABS+UV
Waterproof standard: IP68
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. LED 12x1W/12V
(White color/Auto color change)

Cable: 2x4mm²x1.5m

5. LED 18x1W/12V
6. LED 24x1W/12V
7. LED 18x3W 35W/12V



Material: 304 Stainless steel+ABS+UV
Cable: 2x4mm²x1.5m
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V
3. 441 LED Bulbs 35W/12V
4. 546 LED Bulbs 40W/12V
(White color/Auto color change)

Waterproof standard: IP68

5. LED 12x1W/12V
6. LED 18x1W/12V
7. LED 24x1W/12V
8. LED 18x3W 35W/12V


FENTON®
POOLS

Underwater Light Series


PK6010 Buried type pool light

Material: 304 Stainless steel
Waterproof standard: IP68
Available:
1. 100W/12V Halogen light bulb
2. 36 LED Bulbs 3W/12V

Cable: 3*2.5mmx 5m
3. 90 LED Bulbs 6W/12V

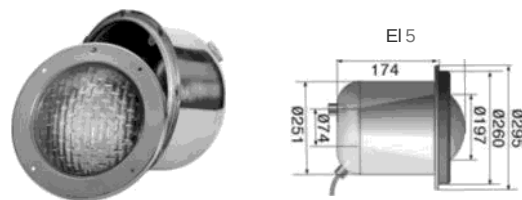
PK6011 Buried type pool light

Material: 304 Stainless steel
Waterproof standard: IP68
Available:
1. 300W/12V Halogen light bulb
2. 252 LED Bulbs 18W/12V

Cable: 3x4mmx1.5m


PK6627 Buried type pool light


Watt: 12/18/25/35W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.5mm*2.5m


PK6628 Buried type pool light


Watt: 6/9/12/18W
Voltage: AC/DC 12V/24V
Material: Electrolytic treatment of stainless steel 316

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm*1.5m

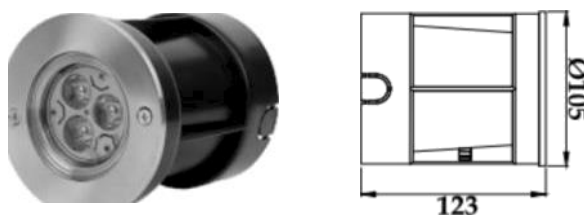
PK6629 Buried type pool light


Watt: 3/6W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm*1.5m

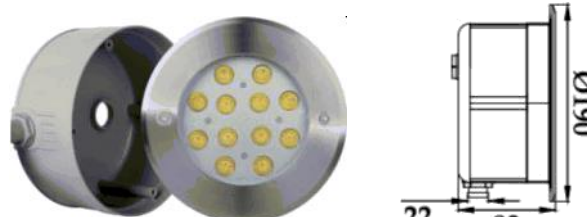
PK6630 Buried type pool light

Watt: 12/18/25W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm*1.5m

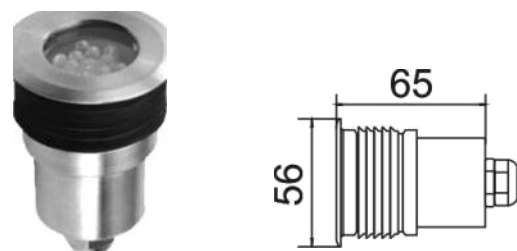
PK6631 Buried type pool light

Material: AISI-304 Stainless steel
Watt/Voltage: 1W/12V

Waterproof standard: IP68


PK6632 Buried type pool light


Watt: 6/9/12/18W
Voltage: AC/DC 12V/24V
Material: 304 Stainless steel

Waterproof standard: IP68
Lens material: Tempered glass
Cable: 3*1.0mm*1.5m

RGB series Underwater Light

FENTON®
POOLS

RGB Remote Control

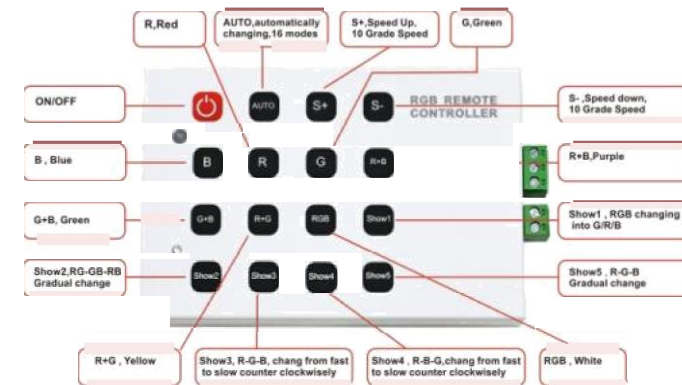


PK041 Remote Control



Battery 23A 12V
Working current: <30mA
Control power: 600W
Handle transmitting frequency: 315MHz
Remote output power: 3mW
Remote control size: 132*52*11mm
Remote control distance: 30 meters in open area, built-in antenna

Wiring Diagram

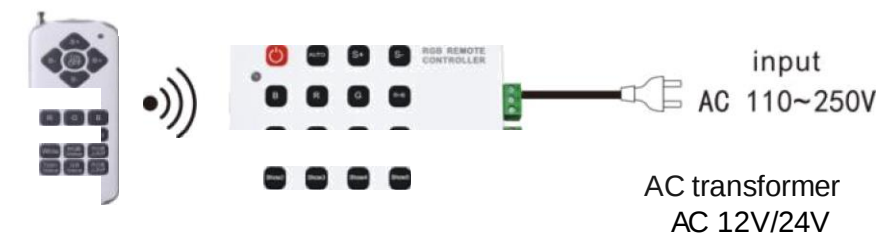

PK041 Synchronous Remote Controller is used together with RGB Controller, allowing users to switch between 7 kinds of static light colors, 9 kinds of lighting transformation modes at will. They can quickly select the next mode and adjust the light brightness to achieve wireless control at close range.



RGB INSTRUCTION

B 1: BLUE 2: RED 3: GREEN 4: R+B, PURPLE
5: G, GREEN 6: R, YELLOW 7: R+B, WHITE
8: R, G, B 9: R, G, B, WHITE
10: R, G, B, WHITE
11: R, G, B, WHITE
12: R, G, B, WHITE
13: R, G, B, WHITE
14: R, G, B, WHITE
15: R, G, B, WHITE
16: R, G, B, WHITE
17: R, G, B, WHITE
18: R, G, B, WHITE
19: R, G, B, WHITE
20: R, G, B, WHITE
21: R, G, B, WHITE
22: R, G, B, WHITE
23: R, G, B, WHITE
24: R, G, B, WHITE
25: R, G, B, WHITE
26: R, G, B, WHITE
27: R, G, B, WHITE
28: R, G, B, WHITE
29: R, G, B, WHITE
30: R, G, B, WHITE
31: R, G, B, WHITE
32: R, G, B, WHITE
33: R, G, B, WHITE
34: R, G, B, WHITE
35: R, G, B, WHITE
36: R, G, B, WHITE
37: R, G, B, WHITE
38: R, G, B, WHITE
39: R, G, B, WHITE
40: R, G, B, WHITE
41: R, G, B, WHITE
42: R, G, B, WHITE
43: R, G, B, WHITE
44: R, G, B, WHITE
45: R, G, B, WHITE
46: R, G, B, WHITE
47: R, G, B, WHITE
48: R, G, B, WHITE
49: R, G, B, WHITE
50: R, G, B, WHITE
51: R, G, B, WHITE
52: R, G, B, WHITE
53: R, G, B, WHITE
54: R, G, B, WHITE
55: R, G, B, WHITE
56: R, G, B, WHITE
57: R, G, B, WHITE
58: R, G, B, WHITE
59: R, G, B, WHITE
60: R, G, B, WHITE
61: R, G, B, WHITE
62: R, G, B, WHITE
63: R, G, B, WHITE
64: R, G, B, WHITE
65: R, G, B, WHITE
66: R, G, B, WHITE
67: R, G, B, WHITE
68: R, G, B, WHITE
69: R, G, B, WHITE
70: R, G, B, WHITE
71: R, G, B, WHITE
72: R, G, B, WHITE
73: R, G, B, WHITE
74: R, G, B, WHITE
75: R, G, B, WHITE
76: R, G, B, WHITE
77: R, G, B, WHITE
78: R, G, B, WHITE
79: R, G, B, WHITE
80: R, G, B, WHITE
81: R, G, B, WHITE
82: R, G, B, WHITE
83: R, G, B, WHITE
84: R, G, B, WHITE
85: R, G, B, WHITE
86: R, G, B, WHITE
87: R, G, B, WHITE
88: R, G, B, WHITE
89: R, G, B, WHITE
90: R, G, B, WHITE
91: R, G, B, WHITE
92: R, G, B, WHITE
93: R, G, B, WHITE
94: R, G, B, WHITE
95: R, G, B, WHITE
96: R, G, B, WHITE
97: R, G, B, WHITE
98: R, G, B, WHITE
99: R, G, B, WHITE
100: R, G, B, WHITE



FENTON®
 POOLS

RGB Series Underwater Light



PK8001 Wall mounted type pool light

Material: PC
Cable: 2x1.0mm²X1.5m
 1.LED Bulbs 18W/12V/24V

Waterproof standard: IP68
Available:
 1.LED Bulbs 35W/12V
 1.LED Bulbs 40W/12V



PK8004 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 2x1.0mm²X1.5m
 1.LED Bulbs 18W/12V/24V
 2.LED Bulbs 25W/12V/24V
 3.LED Bulbs 35W/12V/24V

Waterproof standard: IP68
Available:
 4.LED Bulbs 40W/12V/24V
 5.LED Bulbs 12x1W/12V/24V
 6.LED Bulbs 18x1W/12V/24V

(White color/ Auto color change)




PK8005 Wall mounted type pool light

Material: 304 Stainless steel
 1.LED Bulbs 12W/12V/24V
 2.LED Bulbs 18W/12V/24V
 3.LED Bulbs 25W/12V/24V

Waterproof standard: IP68

(White color/ Auto color change)

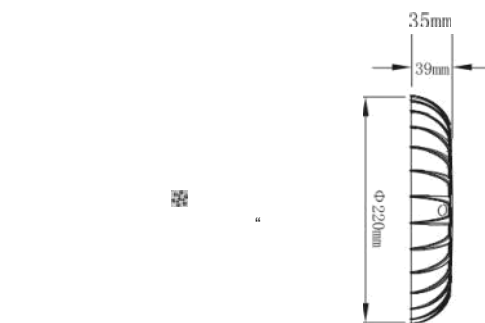


PK8003 Wall mounted type pool light

Material: PC
Cable: 2x1.0mm²X1.5m

Waterproof standard: IP68
Available:

(White color/ Auto color change)

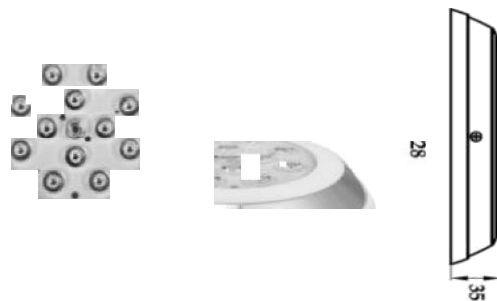

PK8004 Wall mounted type pool light

Material: 304 Stainless steel
Cable: 3x1.0mm²X1.5m

Waterproof standard: IP68
Available:

(White color/ Auto color change)

TRANSFORMERS


 VTP-042
 Transformers

(220V—12V) 50Hz/60Hz
 60W / 100W / 200W / 300W / 400W


 SP-034
 Junction Box


Water Descent

FENTON®
 POOLS


Technical Information

Model	Connection size	A mm	B mm	C mm	D mm	Power	Voltage
With LED light							
WD300-25-LED	1.5inch	50mm	306	138	76	25	4W DC12V
WD300-150-LED	1.5inch	50mm	306	263	76	150	4W DC12V
WD300-230-LED	1.5inch	50mm	306	343	76	230	4W DC12V
WD800-25-LED	1.5inch	50mm	606	138	76	25	6W DG12V
WD600-150-LED	1.5inch	50mm	606	263	76	150	8W DC12V
WD600-230-LED	1.5inch	50mm	606	343	76	230	8W DC12V
WD900-25-LED	1.5inch	50mm	906	138	76	25	12W DC12V
WD900-150-LED	1.5inch	50mm	906	263	76	150	12W DC12V
WD900-230-LED	1.5inch	50mm	906	343	76	230	12W DC12V
WD1200-25-LED	1.5inch	50mm	1206	138	76	25	17W DC12V
WD1200-150-LED	1.5inch	50mm	1206	263	76	150	17W DC12V
WD1200-230-LED	1.5inch	50mm	1206	343	76	230	17W DC12V
Without LED light							
WD300-25	1.5 inch	50mm	306	138	76	25	-
WD300-150	1.5 inch	50mm	306	263	76	150	-
WD300-230	1.5 inch	50mm	306	343	76	230	-
WD600-25	1.5 inch	50mm	606	138	76	25	-
WD600-150	1.5 inch	50mm	606	263	76	150	-
WD600-230	1.5 inch	50mm	606	343	76	230	-
WD900-25	1.5 inch	50mm	906	138	76	25	-
WD900-150	1.5 inch	50mm	906	263	76	150	-
WD900-230	1.5 inch	50mm	906	343	76	230	-
WD1200-25	1.5 inch	50mm	1206	138	76	25	-
WD1200-150	1.5 inch	50mm	1206	263	76	150	-
WD1200-230	1.5 inch	50mm	1206	343	76	230	-


WATER DESCENT WITH VALVE INSTALLATION

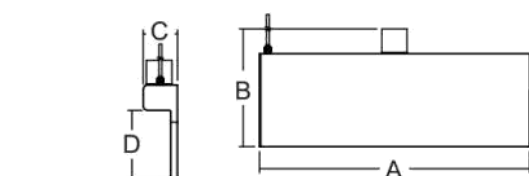

Utility Model Patent Certificate ' ZL 2017 2 0295318.6

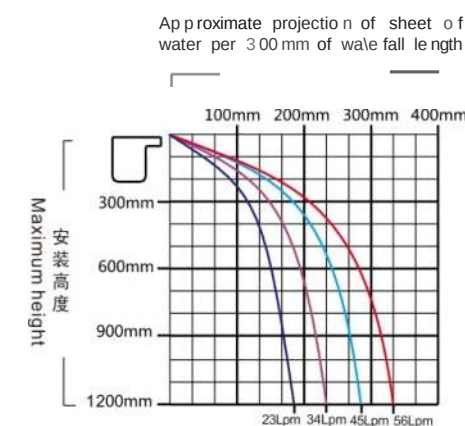

MULTIPLE WATER DESCENT WITH VALVE MOUNTING

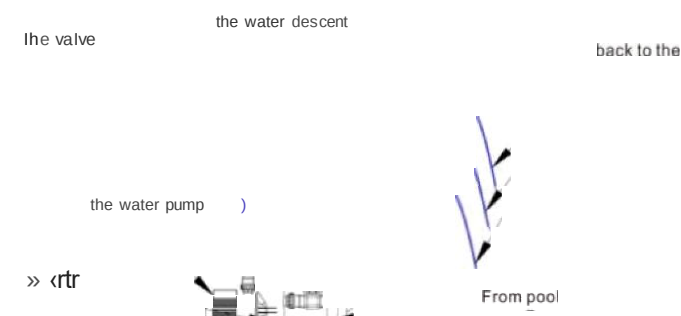

"PKES" water descent are suitable for installation on finished walls and new construction walls, as well length and thickness of the wall product design unique novel, beautiful. Efficient to hide the outlet, Showing a beautiful linear effect of the water.

FENTON[®]
POOLS

New Water Descent



“PIKES” water descent provides several sizes and configurations to be available for different installation requirements. With a suitable water pump and filtration system, you Can enjoy vibrant water falling effect, which will bring elegance and visual interest to the private gardens, swimming pools, parks or gardens. The soothing sound of the water flowing will add pleasure to people.

FEATURES

- Replnceable light bai with line length of 3m.
- Easy to install bottom water inlet
- Hig h Slabili ty, advanCe0 arlifical waterfall Over in China
- BuItt-in waterproof LED lighis to beauttfy the water color
- The LED lights are powered by 12V DC. RGB light source are safe and reliable
- The LEO lights can be operated lthrough remote control, different light mode changes
- The oulets of the waterfall are available in different sizes la meet di fferent installation requirements
- Multiple water descent systems can be connected to one controlJer to meet the effect sy \chorr1zation of light mode

WATER DESCENT WITH VALVE INSTALLATION

the water dscent

back to the /swimming pool

water distribution to the swimming pool

the water pump

the filter

FROM POOL

the water dscent

the valve

back to the SWIMMING POOL

the water pump

the filter

POOL

Power cord

Seven Colored Lights



Model	Connection size	B	"	"	Power	V! **8+
With LED light						
NDR300-38-LED	1.5 inch	fi10mm	306	109	136	38
WDR300-150-LED	1.5inch	50mm	300	221	i36	1sB
NOR300-230- LED	1.5 inch	50mm	306	70y	136	230
WDR600-38-LED	1.5inch	50mm	606	iee	v26	38
NOR600-150- LED	1.5inch	50mm	606	221	136	150
NORMB-238- LED	1.5inch	50mm	606	301	136	236
NDR900-38-LLD	1.5inch	50mm	906	109	136	38
NOR900-156- LED	1.5inCh	50mm	906	221	136	156
NOR908-236- LED	1.5inch	50mm	906	301	136	236
WDR120*B-38-LED	1.5inch	50mm	1206	109	i36	38
WDR1280-150-LED	1.5inch	50mm	1206	221	136	150
WDR1200-230-LE0	1.5inch	50mm	1206	301	136	236
Without LED light						
WDR300-38	1.5inch	50mm	306	1B9	136	38
WDR300-150	1.5inch	50mm	306	221	136	156
WDR300-230	1.5inch	50mm	306	301	136	230
WDR600-150	1.5inch	50mm	606	1B9	136	38
WDR600-230	1.5inch	50mm	606	221	136	150
WDR900-30	1.5inch	50mm	906	109	136	38
WDR900-158	1.5inch	50mm	906	221	136	158
WDRMB-230	1.5inch	50mm	906	301	136	230
WDR1200-38	1.5inch	50mm	1206	169	136	38
WDR24T-150	1.5inch	50mm	1206	221	136	150
WDR200-230	1.5inch	50mm	1206	301	136	230

New Water Descent






Product Number	Model	Product Description	Operating Temperature	Input	Output	Transmitting Distance
08080016	K24/ K.O2	LED CONTROL BOX	-20+40°C	S0/60L-JZ	DC 12V/24W	3M
08080017	K25/ K-O1	LED CONTROL BOX	.20+40°C	AC 100V-240v 50/60HZ	DC 12V/60W	20 M

Model	Product Name	Length	Voltage	Power
L30	LED strip	300mm	DC12V	4W
L60	LED strip	600 mm	DC12V	8W
L90	LED strip	900mm	DC12V	12W
L120	LED strip	1200mm	DC12V	17W

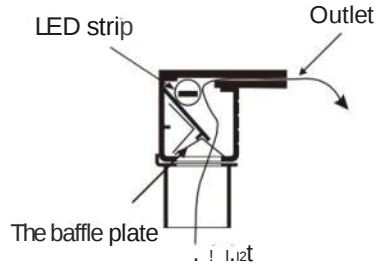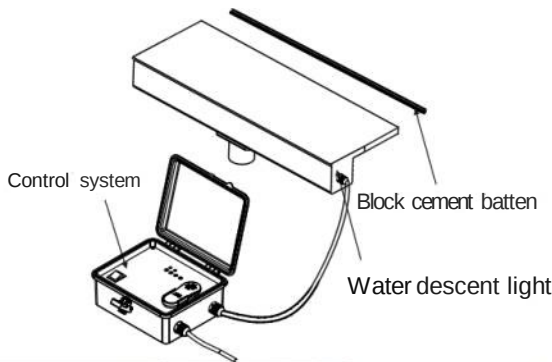


Do not move the retaining bar before installation is complete, and avoid prolonged exposure to the sun!

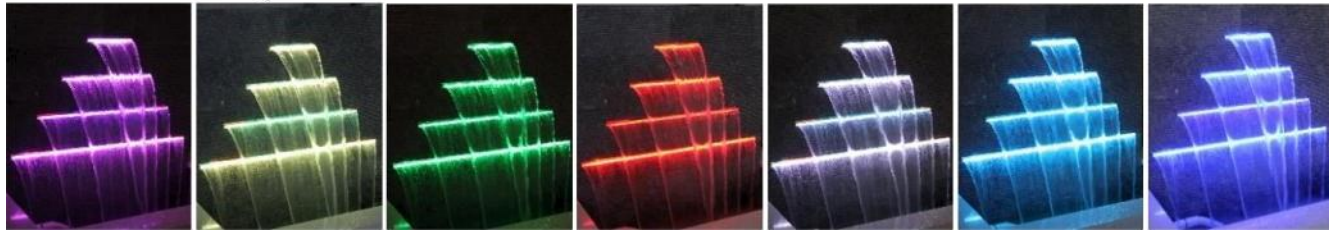

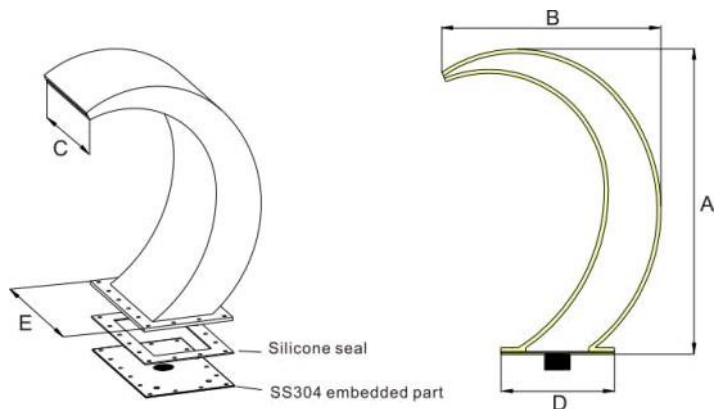

Technical Characteristics

Model	Connection	Size	A(lym)	R/f-nm*	Cfmml	D(mm)	E(mm)	Power	Voltage
WF-300	1S inch	50mm	603	423.5	320	236	416	—	—
WF-301	2 inch	63mm	750	540.6	395	280	500	—	—
WF-300LED	1S inch	S0mm	603	423.5	320	236	416	12.0W	DC12V
WF-301LED	2 inch	63mm	750	540.6	395	280	500	13.0W	DC12V

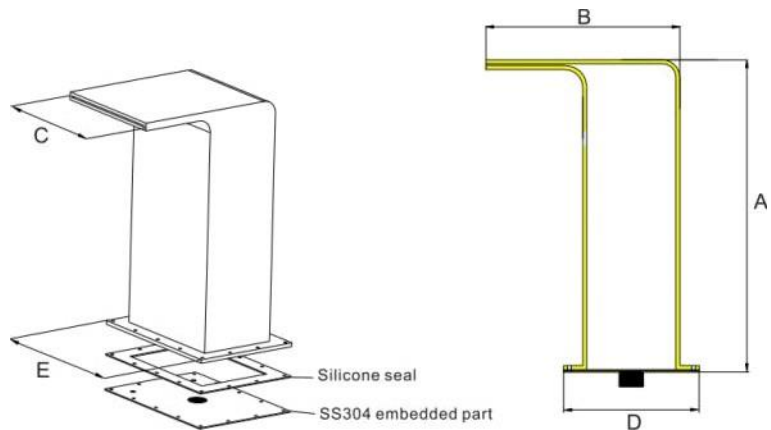

Technical Characteristics

Model	Connection Size		A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Power	Voltage
WF-302	15 inch	S0mm	603	45D	300	280	400	—	—
WF-303	2 inch	63mm	800	500	400	350	500	—	—
WF-302LED	1.5 inch	S0mm	603	450	300	280	400	13.0W	DC12V
WF-303LED	2 inch	63mm	800	500	400	350	500	14.0W	DC12V




K-01

K25



MODEL : K25

Operating temperature	-20 +40°C
Input	AC 100V-220V 50/60Hz
Output	DC 2V/60w
Transmitting distance	20m

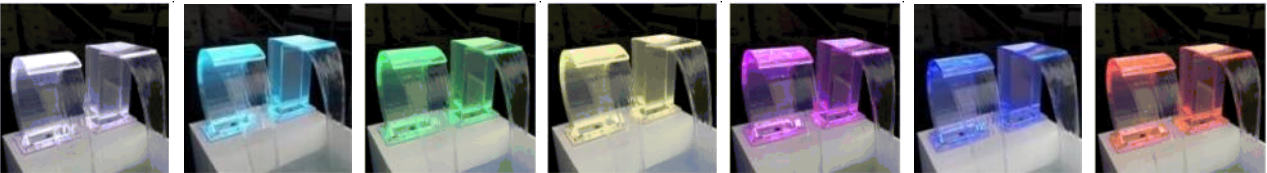


SPA Series




SPA Series




Description	Model No.	Material	Length (mm)	Width (mm)
Spa bed	VTSPA-14	Acrylic	1996	830

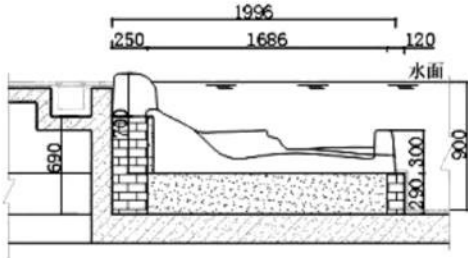

Description	Model No.	Material	Length (mm)	Width (mm)
Massage seat	VTSPA-15	Acrylic	950	700

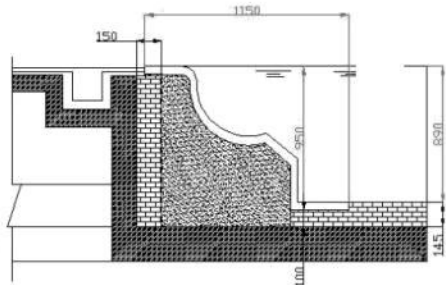

Description	Model No.	Material	Length (mm)	Width (mm)
Massage seat	VTSPA-09	Acrylic	890	600

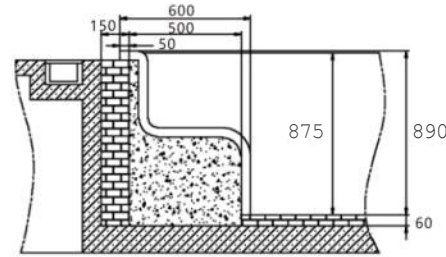



Model No.	Description	Material	Size
-----------	-------------	----------	------

VTSPA-05	Vichy Shower	Acrylic	2250*1030*150mm
----------	--------------	---------	-----------------



Model No.	Description	Material	Color	Size
-----------	-------------	----------	-------	------

WSPA-06B	Water pressure massage bed	Acrylic	White	1860*680mm
----------	----------------------------	---------	-------	------------



Model No.	Description	Material	Size
-----------	-------------	----------	------

MS-011M	Massage bed	Acrylic	1900*600*600mm
---------	-------------	---------	----------------


VT-090 Arc hook water waterfall 600x300mm	V-7090 Dolphin Mountain	W492 Water curtain	W481 Water curtain
VY-011B Universal strength shower	VY-030B Duck mouth shower	VY-020B Barrage shower	VT-031 Back massage shower
			VY-080 High waterfall screen equipment Size: 400/500/600mm




FENTON®
 PEOLS

SPA Series



VT-06t Ball shape rain shower
 VT-062 Ball spraying shower
 VT-063 Ball universal hammer shower
 W464 Ball universal duck shower
 W-065 New heavy rain shower
 VT-066 New duck month shape shower
 VT-068 Double head shower



VT-111
 Round bubble shower
 Size: B300mm



VT-110
 Round spraying shower
 Size: @300-450mm



W-J12
 Fountain nozzle
 Size: @300mm




VT-113
 Square bubble shower
 Size: 300x350mm



VT-116
 Floating bath spray board
 Size: 350x350mm



VT-117
 Hips massage
 Size: 400x25mm



VT-120
 Water foot hydraulic massager
 Size: 350x350mm



VT-114
 Rain shower
 Size: 1000x300x100mm



VT-115
 Size: 250x180mm



VT-121
 Acupuncture shower



VT-128
 Body massage shower



VT-118
 Stainless steel spa massage chair
 Size: 600x500mm



VT-122
 Bath bracket



VT-067
 Acupuncture shower



VT-133
 Barrel impact


SPA Series
FENTON®
 PEOLS


VT-022 Fan shape shower
 VT-023 Universal phoenix tail shower
 VT-030 Duck mouth impactor shape shower
 VT-020 Heavy rain shower
 VT-0t1 Universal strength shower
 VT-010 Universal airjet shower



VT-0004
 Aerated nozzle



VT-0006
 Heavy rain nozzle



VT-0001
 Flat hole nozzle



VT-0007
 Phoenix tail nozzle



VT-0003
 Universal water hammer nozzle

Size:
 100/150/
 200/300mm



VT-0008
 Duck mouth shape nozzle



VT-00023
 Universal jade
 chapstick shower nozzle



VT-0014
 Slimming nozzle




VT-0002
 Fan shape nozzle



VT-0011
 Spraying round nozzle



VT-0012/13
 Duck mouth shape nozzle
 100/150mm



VT-111B
 Round bubble board

VT-0009
 Five holes round nozzle

W4010
 Three holes round nozzle

FENTON®
 POOLS

SPA Series



Cartoon Impact Bath

FENTON®
 POOLS


□ 1500x2000mm
□ 1250x2000mm
□ 1000x2000mm



FENTON®
 PEOLS

Inductive Controller



VTP-33301

Exquisite pUrple crystal sensor
 Single channel induction controller (disk assembly)

la 130 x 65
 66 x 72 x 115



VTP-33302

Diamond purple crystal sensor
 Single channel induction controller (disk assembly)

ai 130 x 70
 66 x 72 x 115



VTP-33304

Frosted white crystal sensor
 Single channel induction controller (disk assembly)

ei 130 x 65
 66 x 72 x 115



VTP-33305

Diamond purple crystal sensor
 Single channel induction controller (disk assembly)

0 130 x 90
 66 x 72 x 115



VTP-338

Stainless steel & crystal sensor
 B 90 x 40




VTP-33303

Chromium plated ABS & Siwer ABS sencer
 el 90 x 40



VTP-340

Stainless steel inclined columr & ABS sensor
 B 115 x 90



VTP-33306

Under water massage lamp
 113 x 113



VTP-33311

Small display screen
 (wall hanging)
 270 x 150 x 30



VTP-33309

Small display screen
 (Concealed installation)
 265 x 130 x 30



VTP-33310

Double sided desktop display acraan
 (Two Sides and two temperature)
 270 x 140 x 100




VTP-33312

Big display screen
 (wall hanging)
 265 x 270 x 30

FENTON®
 PEOLS

Machine Room Equipment

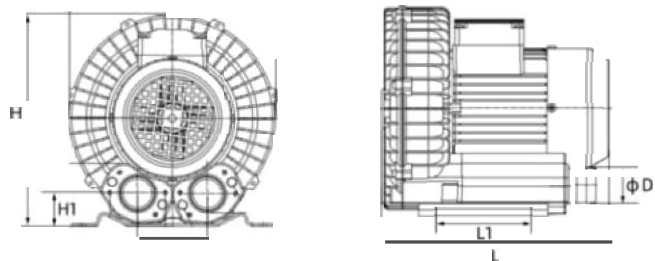


VTP—003


H=height W=width
L=Length L1=Side mounting center distance

Size (mm)							
Model	L	W	H	A	D	HI	LI
XB-550	275	263	272	92	40	40	83
XB-750	275	263	272	92	40	40	83
XB-1100	302	287	305	113	50	48	96
XB-1500	360	328	338	120	60	48	140
XB-2200	348	350	370	124	60	58	140
XB-3000	415	365	390	126	60	60	140
XB-4000	448	375	400	126	60	60	140
XB-7500	470	445	466	145	75	65	172

FEATURES

- Centrifugal vanes make high pressure, great outflow and low noise.
- High quality engine ensures safe and steady effect. Non-oil lubrication and pure compressed air. Phosphorize disposition, regular coloring and adhesive strength.
- Wide range of power, long life of this machine.

APPLICATION

• To be used in paper cutters, filter cigarette shapers, pulverizingdries, net printers, photo plate makers, liquid-canning machines, electric welding equipment, film machinery, plate makers, liquidcanning machines, electric welding equipment, film machinery, papertransporting, clothes dry-cleanin g, rinsing , air cleaning, pneumatic conveying , material conveying , collection and so on.

NOTE

a The products must be put at dry and ventilated places abovewater level .

Technical Characteristics

Model	Voltage (V/Hz)	Rated current (A)	Power (w)	Pressure (kPa)	Max Vacuum (kPa)	Output (m³/h)	Noise (kPa)	Weight (kg)	Dimensions (cm)
XB-550	220/50	2.9	550	14	-13	8S	<55	14.8	30*31*31.5
XB-750	220/50	3.8	750	18	-15	110	<55	16.5	35*32*34
XB-1100	220/50	4.9	1100	25	-21	145	<63	21	37*35*38
XB-1500	220/50	8.6	1500	27	-24	210	<84	26.75	38*35*39.5
XB-2200	380/50/60	5.2	2200	30	-35	230	<69	31	41*41*43
XB-3000	380/50/60	7.3	3000	38	-35	318	<69	39.4	47*44*46
XB-4000	380/50/60	9.3	4000	42	-35	380	<70	54	49*46*48.5
XB-7500	380/50/60	16.7	7500	50	-51	500	<80	71.5	50*50*52.5


VTP—011

1-10m² Plate type heat exchanger


Technical Characteristics

Model	Exchange area (m²)	In/Outlet water (mm)	WxHxThickness (mm)	Maximum weight (kg)
BR005	0.5-5	40	230x580x(158-300)	70
BR01	2-10	50	320x860x(472-760)	280
BR02	8-30	65	410x1180x(660-1060)	590
BR03	10-60	100	490x1420x(730-1400)	1450

Cool Machine


10HP 380V 1450X800 X1600 mm
8HP/380V 1450 x 800 x 1600mm
SHP: 380V 1250X650X 1080mm

2HP / 220V
3HP.. 380V
920X650X960 mm



VTP-006
" —T" water heater
S.S.—60kw,220V/380U

Technical Characteristics

Pakage Dimensionss

Item No.	Power (KW)	Inlet/Outlet (inch)	Voltage (V)	Long (mm)	Width (mm)	Hight (mm)
HS-55	5.5	1	220/380	535	110	380
HP-75	7.5	1.5	220/380	535	110	380
HS-110	11	1.5	220/380	535	110	380
HS-150	15	1.5	220/380	535	110	380
HS-180	18	1.5	220/380	535	110	380
HS-240	24	2	380	580	365	510
HS-320	32	2	380	580	365	510
HS-360	36	2	380	580	365	510
HS-450	45	2	380	725	425	560
HS-600	60	2	380	725	425	560

New NX Water Heater



NX water heater
3—9KW/220V/380V



NX water heater
12—18KW/220V/380V
21-36KW/380V/4J 5V

Technical Characteristics

Item No.	Power (KW)	Inlet/Outlet (inch)	Voltage (V)	Pakage(mm) L x W x H
NX-30	3	1.5	220/380	535*270*105
NX-60	6	1.5	220/380	535*270*105
NX-90	9	1.5	220/380	535*270*105
NX-120	12	1.5	220/380	535*270*105
NX-150	15	1.5	220/380	535*270*105
NX-180	18	1.5	220/380	535*270*105
NX-210	21	2	380	610*425*140
NX-240	34	2	380	610*425*140
NX-300	30	2	380	610*425*140
NX-360	36	2	380	610*425*140



VTP—010 I

I type heat exchanger



VTP—010 II

II type heat exchanger




VTP—010 III

III type heat exchanger

Features:


Heat Exchanges are highly engineered for fast heating, high capacity and easy use. High capacity, multi-tubular heat exchange. Primary inlet water circuit (heating agent). High efficiency, low energy consumption.

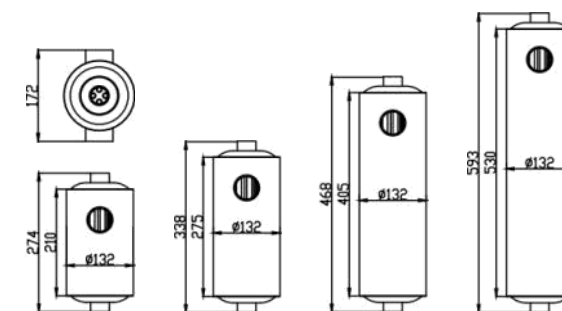

Technical Characteristics

Model	Power (kw)	Heat Water Flow (l/min)	Cold Water Flow (l/min)	Heat Transfer SQRT Inn°s	Length Tmm)	Volume (m³)
MF80	24	20	150	2.0 0.10	290	<30
MF135	40	25	200	3.2 0.30	355	30-60
MF200	60	30	250	4.6 0.45	485	60-75
MF260	75	35	300	6.4 0.60	610	75-115
MF400	120	50	360	12.0 1.10	1060	115-175

Installation

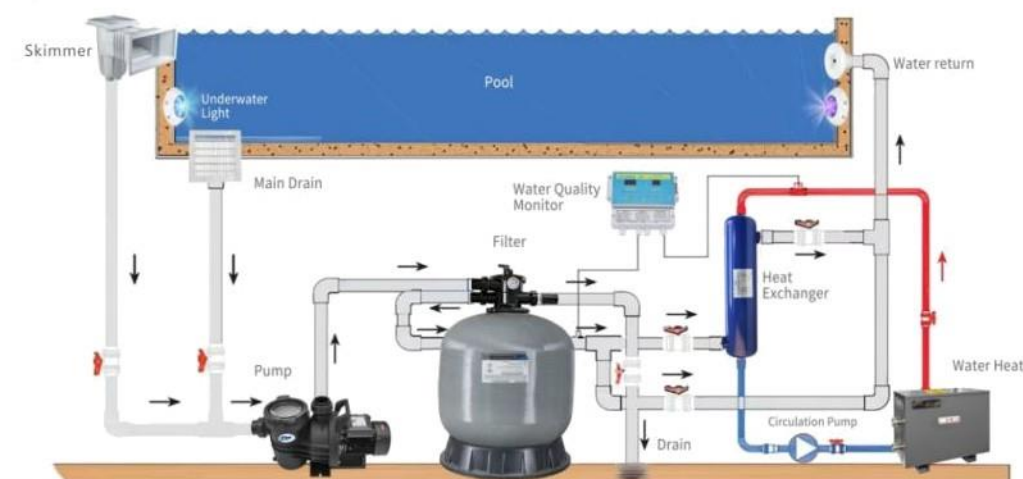

FENTON®
POOLS

Heat Pump




MD20D

MD50 D

Swimming Pool Heat Pump Technical Characteristics						
Model No	MD20D	MD30D	MDSOD	MD100D	MD1SOD	MD200D
Horse Power(HP)	2	3	5	10	15	20
Rated input power(KW)	1.84	2.98	4.6	9.2	11	19
Delivered(KW)	7	14	21	42	50	84
Rated voltage(V)	220	220/380	380	380	380	380
Rated frequency(Hz)	50					
Rated Current(A)	8	13/6	9	18	25	35
Maximum outlet water temperature(°C)	35/45					
Water flow(L/H)	2,000	3,600	5,500	11,000	15,000	22,000
Circulating water pipes(mm)	50	50	50	63	63	75
Dimensions(mm)	1050*350*620	1120*490*710	1120*490 1260	1440*760*1060	440*760*1060	T990*980*2080
Weight(KG)	75	95	150	300	330	600
Level of security	IPX4					
Electric shock protection grade	One-grade					
Noise(Db)	s40Db	s45Db	s55Db	s60Db	60Db	
Refrigerant	R417A/R407C/R22/R404A					
Compressor	Valley wheel compressor					
Evaporator	Finned heat exchanger					
Condenser	Titanium heat exchanger					
Throttle units	Electric expansion valve					
Defrost	PID defrost, according to the free fin temperature and environment temperature running state, intelligent defrost					
Control system	MUI0-COOLFOI					
The test conditions of above parameter	Dry bulb temperature: 20°C Wet bulb temperature: 17°C Inlet water temperature: 15°C					

Dehumidify Unity



DH—504B

- Front air inlet, left side air outlet.
- » Defrosting function automatically starts when the ambient temp is below 18 C.
- o intelligent Micro-computer control with Digital Displaying humidity level.
- « Four casters make the machine more freely.
- » Filter, easy take—down for cleaning.

Applied area : 2. 6—3m Height 40—60m"

220v , 50Hz 920 Rotary 8 530 X 375 X 730 32



DH—82B

Applied area : 2. 6—3m Height 140—160m°

220V/50Hz 2000 Rotary 710X 575X1175 78

- « Left side air outlet, front air inlet.
- « Defrosting function automatically starts when the ambient temp is below 18 C.
- « Digital display makes humidity control more freely.
- « Four casters make the machine move freely.
- a External drainage pipe drains off water continuously.



DH—1000

Applied area : 2. 6—3m Height 170—200m-

220V/ 50Hz 3220 Rotary 760 X 565 X 1910 137

- » Upward air outlet, front air inlet.
- » Defrosting function automatically starts when the ambient temp is below 18°C.
- » Digital display makes humidity control more freely.




VTP-024

240x200x120mm

SIMPLE TO OPERATE

The CCOREL 250 ORP/PH Digital Controller automatically maintains both sanitizer ORP(oxidation-reduction potential or redox) and water PH in pools and spas. All operating functions are clearly labeled and accessible from the front panel with safety and easy-reset features not found on other controllers. The default PH control level is 7.0. Below 6.9, the water is too acidic and causes corrosion and eye irritation. Above 7.5, it is too alkaline and causes are irritation plus water cloudiness, scaling, stains and reduced sanitizer efficiency. The default ORP control level is 650mV, values for prevention of germs and bacteria.

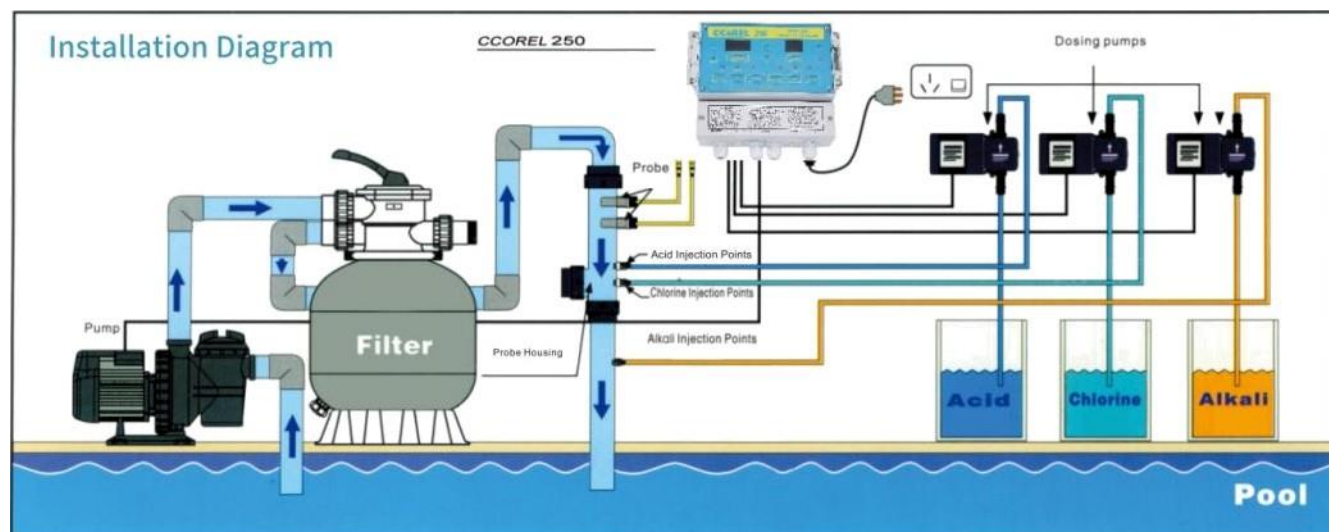

“PIKES” Saltwater solutions:

Salt chlorinator, are an alternative means of sanitizing your pool with chlorine using the process of electrolysis.

The electrolysis process is achieved by passing the salt water solution through an electrolytic cell which converts sodium chloride(salt) in the water into chlorine gas which, when dissolved in water become sodium hypochlorite(liquid chlorine).

Safe and respecting the environment, this technology brings you:

- ' Relaxation: Your pool is automatically disinfected.
- ' Safety: Reduction in chlorine storage and handling.
- Comfort: Clean, safe and crystal-clear water.
- ' Health and well-being: Therapeutic, saltwater does not irritate eyes and dry out skin.

Product characteristics:

- The chlorine production of NQ series salt chlorine generator has been improved obviously, and the disinfection of swimming pool is more efficient.
- It can adjust the chlorine production in 6 grades, meet the requirements of swimming pool in different operation periods, save energy and be very environmentally friendly.
- Simple operation, Chinese and English menu function settings, with manual and automatic time control.
- The reactor has the function of forced heat dissipation and automatic reverse pole cleaning. The reactor has the structure of resin protective layer, and the service life of the product is longer.
- NQ series salt chlorine generator can't control the circulating water pump, underwater light.
- It has the functions of water flow detection, water temperature display, internal overheating protection, salt level prompt, and high-definition OLED display screen.
- There are two optional outlets, which greatly facilitates different management requirements in actual installation.
- Designed removable movable titanium plate structure for easy installation and maintenance.

Technical Characteristics					
l i c e		tt			
NO 20	365 x 260 x 140	16	AC22&240V/50Hz	25DW	s68
NO 30	365 x 260 x 140	25	AC220 +240V/50Hz	25DW	s105
NO 40	365 x 280 x 140	33	AC22&240V/50Hz	25DW	6140
NO 50	365 x 260 x 140	42	AC100+240V/50Hz	250W	s175


FENTON[®]
POOLS

Multifunctional water Quality Monitor



CCOREL online water quality monitoring system can monitor water temperature, PH, ORP, residual chlorine, turbidity, TDS and other indicators closely related to the pool water quality and health indicators in real time, control the dosing pump that needs to be adjusted for each indicator, realize automatic monitoring, automatic dosing, and control the monitoring indicators of pool water quality within the limit range specified in relevant standards. Prevent excessive dosage caused by manual dosing.

Installation Diagram

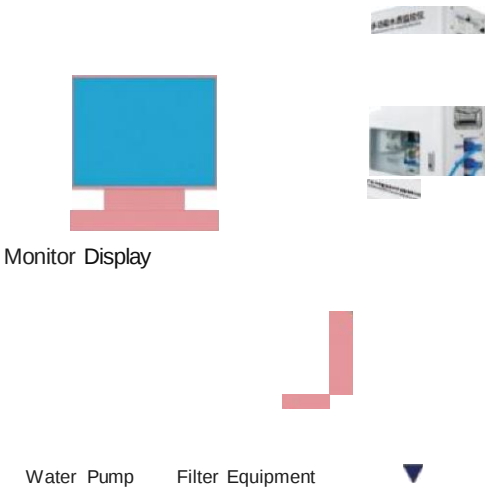

I	
RNS- 00	water temperature + time control +pH+ORP
RNS- 150	Water temperature +time control +pH+TDS
RNS-200	Water temperature + time control +pH+ residual chlorine
RNS-250	Water temperature + time control +pH+ORP+TDS
RNS-300	Water temperature + time control +pH+ORP+ residual chlorine
RNS-350	Water temperature + time control +pH+ residual chlorine +TDS
RNS-400	Water temperature +time control +pH+ORP+ residual chlorine +turbidity
RNS-450	Water temperature + time control +pH+ORP+ residual chlorine +turbidity +TDS

FENTON[®]
POOLS

UV Sterillizer



PYZ 80W-240W

Water treatment capacity	10T/H
Size	980*130*270mm
Working pressure	TO.8Mpa
Voltage	220v/50Hz
Power	80w-240w
Caliber	Dn40 (external thread)
99.9%A Bactericidal rate	99.9%4 Sterilization rate

PYZ 300X 2160X

Water treatment capacity	40T/H
Size	1280*165*430mm
Working pressure	<0.8Mpa
Voltage	220v/50Hz
Power	360w-2160w
Caliber	Dn80 (external thread)
99.99% Bactericidal rate	99.9%A Sterilization rate


Technical Characteristics

Model	PYZ-39	PYZ-80	PYZ-120	PYZ-160	PYZ-200	PYZ-240	PYZ-320	PYZ-360	PYZ-480	PYZ-600	PYZ-720
Power	39W	80W	120W	160W	200W	240W	320W	360W	480W	600W	720W
Water Flow	7T/h	10T/h	15T/h	20T/h	25T/h	30T/h	35T/h	40T/h	45T/h	55T/h	65T/h
Interface	DN40	DN40	DN40	DN50	DN50	DN65	DN65	DN80	DN100	DN100	DN100




PVC plastic chamber is compatible for fresh water, sea water, chlorine feeder and salt chlorinator. Lamp life: 9000 hours of operation, approximate 12 months of continuous service.

Ballasts: UL, CUL, TUV-CE listed, LED visual & audible alarm, Overheating protection, Instant start.

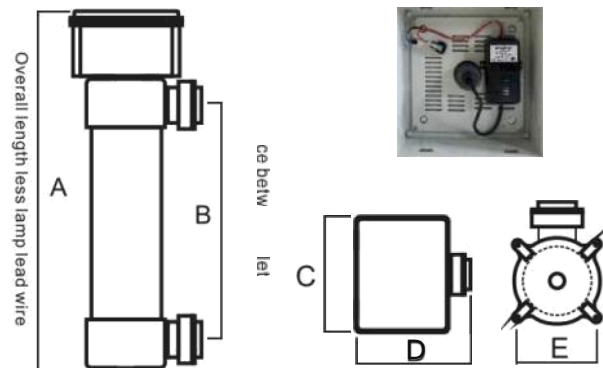

Model	Flow rate GPM/LPH	Dimension (mm) A/B/C/D/E/F	Inlet/outlet Union (Unit: Inch)	UV Lamp	Output power	Voltage frequency	Designed working pressure	Operation temperature
PL-I	162GPM (36612LPH)	765/988/219/ 230/351/305	2"	T585	8Sw	100-240V 50-60Hz	40Psi	2-40V
PL-II	162GPM (36612LPH)	1065/1288/219/ 210/351/305	2"	TS 20	120w	100-240V 50-60Hz	40Psi	2-40°C



VTP-004
Sidekick-Chlorine feeder
703/t
Maximum pressure: 10bar
Flow rate: 9L/H
Working type: Electronic
Voltage: 220V
803#
Maximum pressure: 4 bar
Flow rate: 54L/H
Working type: Electronic
Voltage: 220V



VTP-005
Sidekick-Chlorine feeder
BLUE WHITE
C-660P
Maximum pressure: 4 bar
Flow rate: 13L/H
Working type: Mechanical
Voltage: 220V
C-6125P
Maximum pressure: 2.1 bar
Flow rate: 30L/H
Working type: Mechanical
Voltage: 220V



VTP-009
CL-100
4.21 LBS/2kg
Automatic Chlorine/
Bromine off-Line feeder

VTP-009A
CL-200
9LBS/p.08Cg
Automatic Chlorine/
Bromine off-Line feeder



VTP-008
Automatic Chlorine/Bromine
off-Line feeder

OM-3834
Sup & Blue Clarifier

OM-3835
Sup & Blue Algicide

VTP-027
Chlorine of sanitizing



10-120g

3-5g

10-120g

Model	Prc<luct	Size(CM) L x W x H	Ozone Output	Voltage	(KG) Weight	Pcwwer
HY-013	Ozone	80x5sx130	dUq/h	220V ""	40	1000
			100g/h		60	1300
			120g/h		65	1500
HY-004		32x2Sx82	5g7h		11	160
	40g/h		13		180	
MY-003	Ozone	40x30x93	20g/h		2S	3Bo
			40g/h		30	400
Max. ozone density		Oxygen source: 80 100mg/L		Dry air source: 1S-20mg/L		

Main application:

Ozone generator is mainly used in medicine, water, pure water, mineral water, secondary water supply, swimming pool, aquaculture water, food and beverage industries such as water disinfection essence processing, and chemical industry, papermaking industry such as degreasing, bleaching, for life, industry, hospital sewage treatment (sterilization, remove BOD, COD, etc.), as well as the life sewage, industrial cooling water reuse treatment, etc.



OM-3836
Algaecide
(imported copper sulfate)



OM-3637
PH regulator



OM-383B
Precipitating agent
(aluminum chloride)



VTP-325
ø150 Wind type swim
lane line



VTP-326
Spiral arc Swimming
pool lane rope



VTP-327
6 110 Normal Swimming
pool lane rope



VTP-328
0 120 Six rowed Swimming
pool lane rope



VTP-324
6 12cm Six prism lane rope
(Anti-scratch)



VTP-331
Safe float line



VTP-365
Hook



VTP-366
Hook



VTP-064
Embedded cup



VTP-316
Life buoys



VTP-332
Life clothe




VTP-333
Life clothe



VTP-317
Life-Gaurd chair
1900x900x800mm



VTP-318
Life-Gaurd chair
1900x900x800mm



VTP-315
Lane line reel
size: 150x980x108mm



FT 3045
FT 2545
FT 2045

300-45°Fiberglass Corner Tile (White)
250-45°Fiberglass Corner Tile (White)
200-45°Fiberglass Corner Tile (White)

Model	A	B	H	L
FT3045	174	50	28.5	300
FT2545	154	50	28.5	250
FT2045	133	50	28.5	2@

VTP-303 Standard one-step starting block



VTP-305 Standard two-step starting block





FT 3090
FT 2590
FT 2090

300-90°Fiberglass Corner Tile (White)
250-90°FiDerglass Corner Tile (White)
200-90°Fiberglass Corner Tile (White)

Meet	A	H	L
FT 3090	350	28.5	300
FT 2590	300	28.5	250
FT 2090	250	28.5	200

VTP-301 Standard one-step starting block





PT 3045
PT 2545
PT 2045

300-45°Fiberglass Comer Tile (White)
250-45°Fiberglass Corner Tile (White)
200-45°Fi berglass Corner Ti(e (White)

Model	A	B	H	L
PT3045	174	50	28.5	300
PT2545	154	50	28.5	Z50
PT2045	133	50	2B.5	200


VTP-3011 Standard one-step starting block

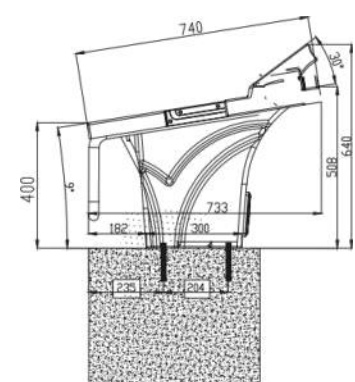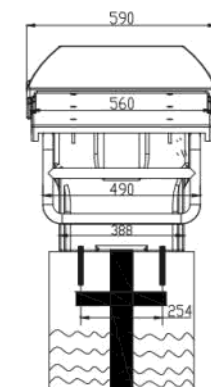

PT 309 0
PT 259 0
PT 209 0


300-90°Fiberglass Comer Tile (White)
250-90°Fi berglass Corner Ti(e (White)
200-90°Fiberglass Corner Tile (White)

Model	A	H	L
PT 3090	350	28.5	300
PT 2590	300	28?	250
PT 2090	250	28?	200

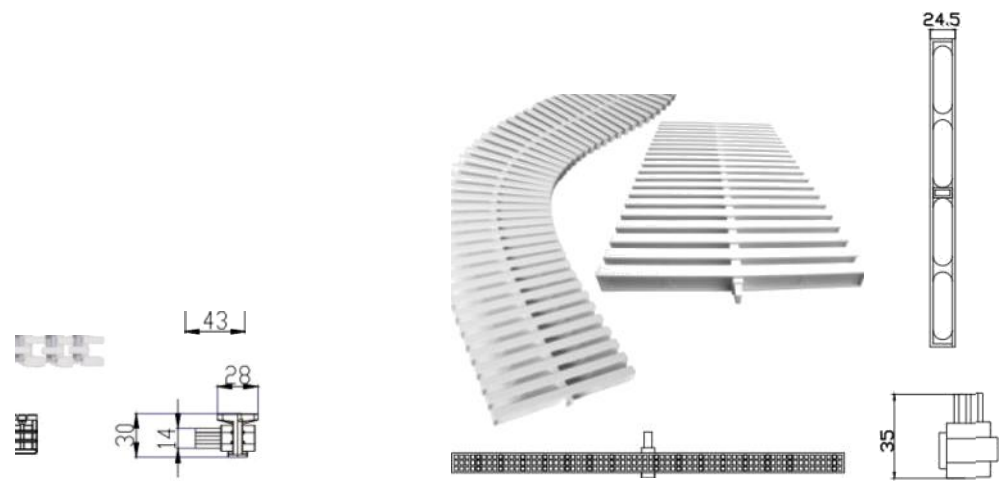


Model No	Colour	Material	Size
VTP-602	White	ABS/PP	18/20/25/30CM

Model No	Colour	Material	Size
VTP-607	White	PP	18/20/2 S/30C M


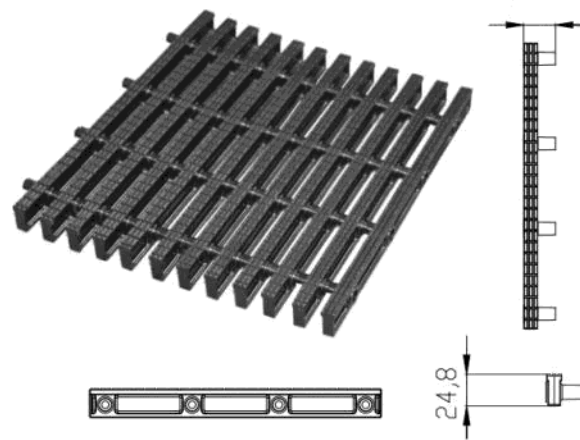


Model No	Colour	Material	Size
VTP-606	WH/B K/GY	ABS	25/30.*3 5C M

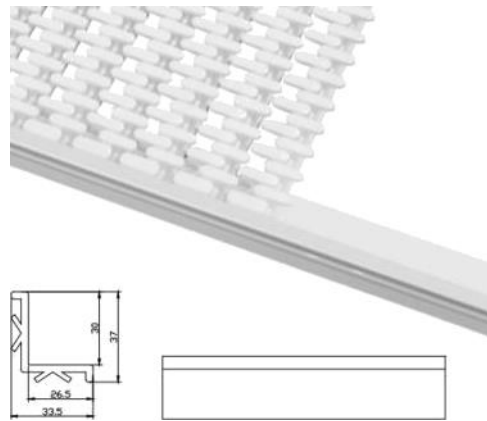


Model No	Colour	Material	Size
VTP-617	White	ABS	2m


Aluminium Alloy Gratings

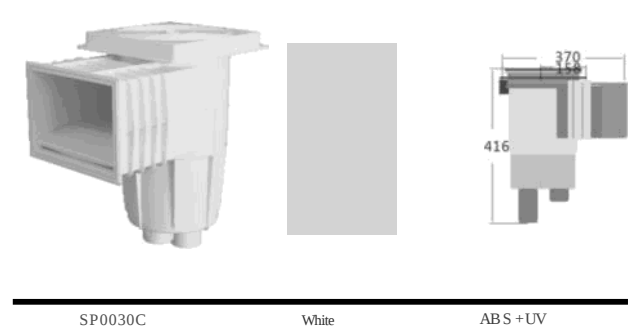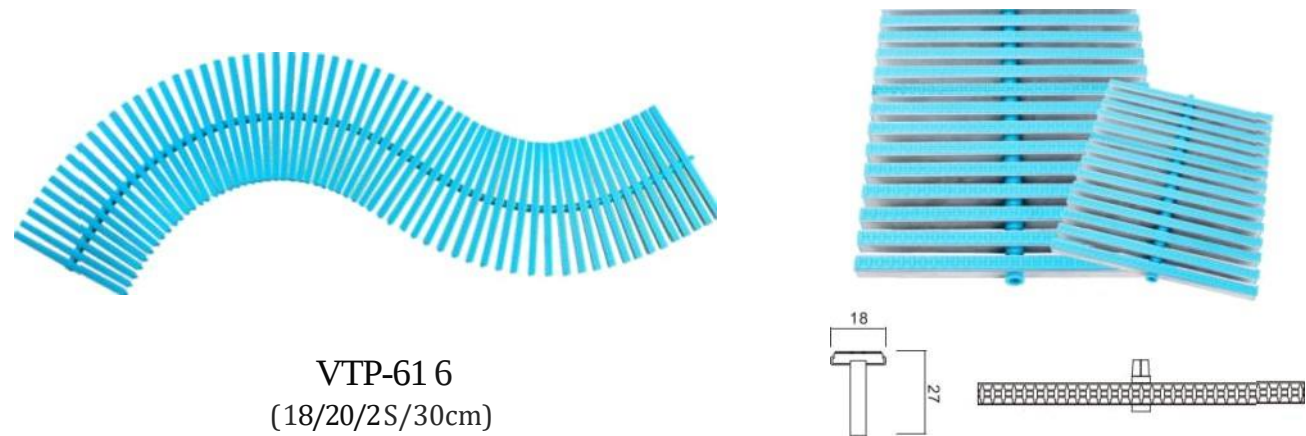


Model No	Colour	Material
SP0030C	White	ABS +UV

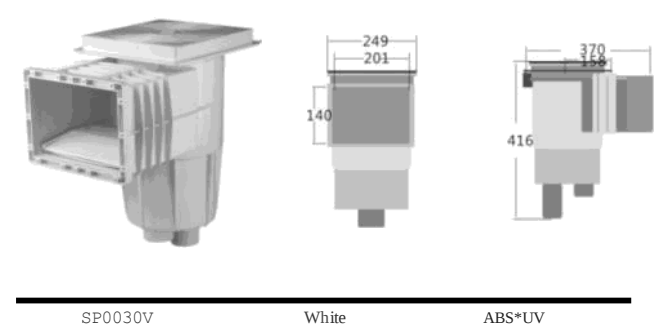


Model No	Colour	Material
SP0030V	White	ABS*UV

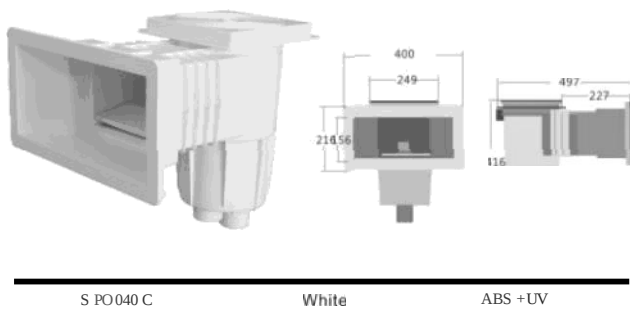


Model No	Colour	Material
SP0040C	White	ABS +UV

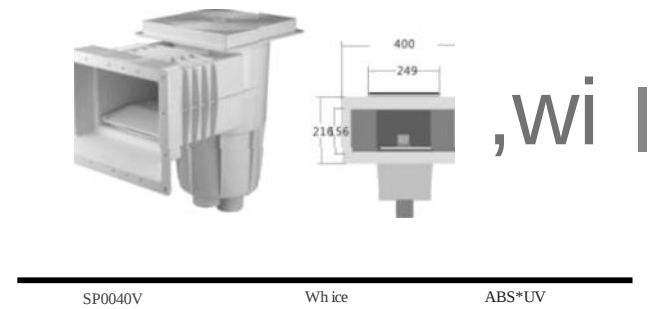


Model No	Colour	Material
SP0040V	White	ABS*UV

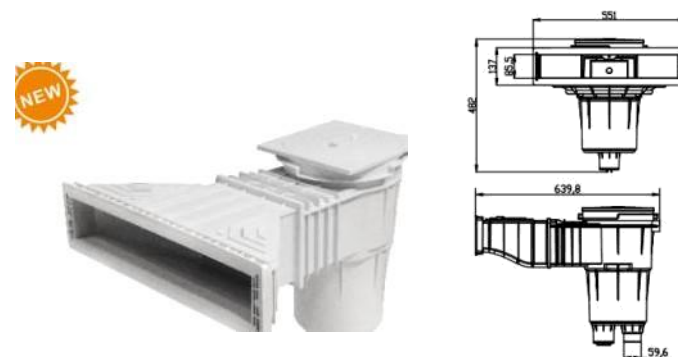

Model No	Colour	Material
SP0080C	White	ABS

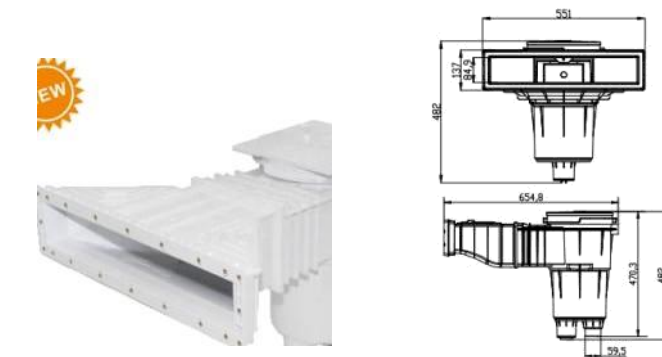


Model No	Colour	Material
SP0080V	White	ABS

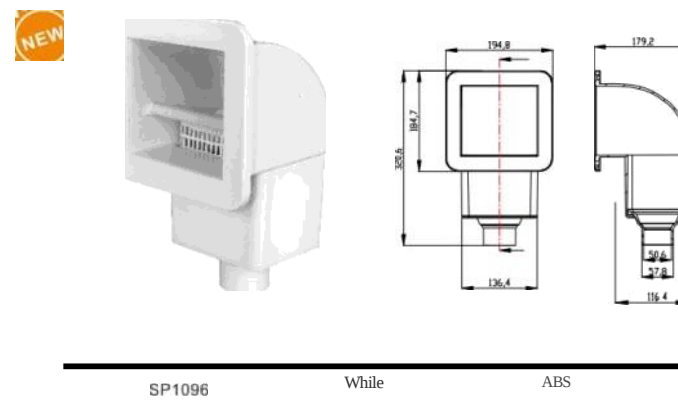


Model No	Colour	Material
SP1096	White	ABS




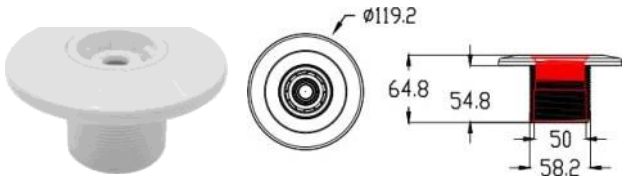


Model No	Colour	Material	Connection
S P2851	White	ABS+ UV	1.5" interpolation 2" external

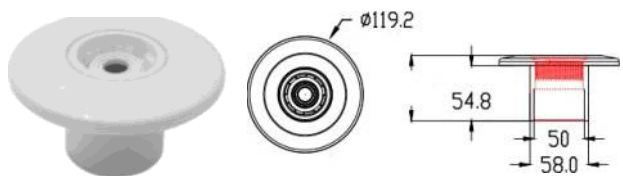

Model No	Colour	Material	Connection
SP2852	White	ABS*UV	1.5"

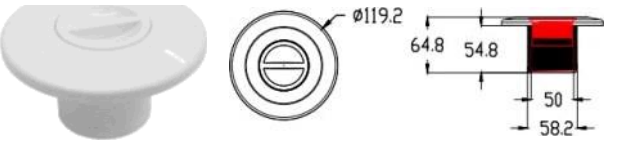

SP2853	White	ABS+ US	4.5" interpolation 2" external
--------	-------	---------	-----------------------------------

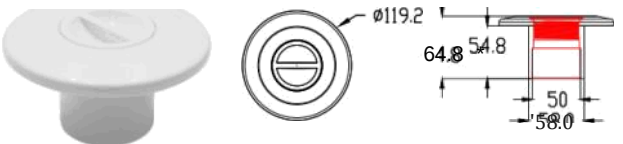


SP2854	White 白色	ABS*UV	1.5"
--------	----------	--------	------




Model No	Colour	Material	Connection
SP2857	white	ABS* UV	8 8" interpolation




Model No	Colour	Material	Connection
SP2858	White	ABS*UV	I.S.

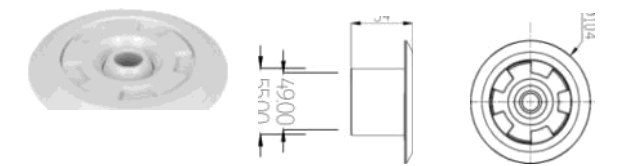


SP1432	White	DN50/DN63	AgS
--------	-------	-----------	-----

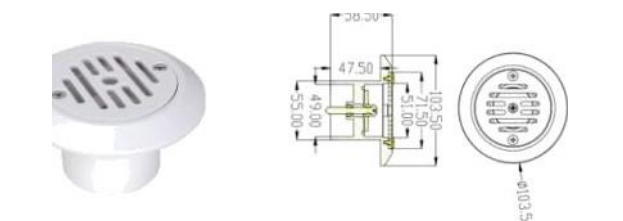


Model No	Colour	Size	Material
SP1433	White	DN50/DN63	ABS

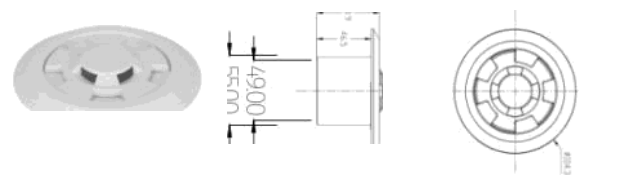


SP1435	White	DN50/ DN63	ABS
--------	-------	------------	-----

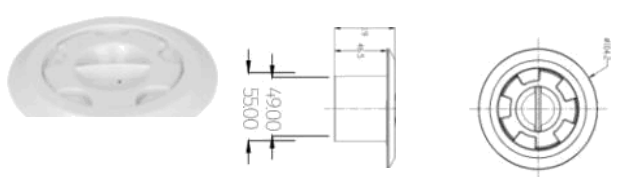

SP1436	White	DN50, DN63	AgS
--------	-------	------------	-----

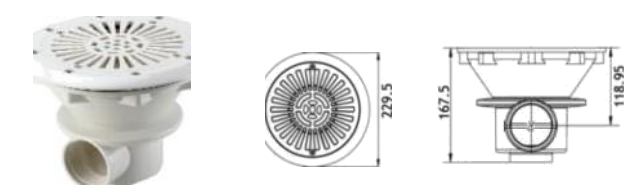


SP2850V	White	ABS+ UV
---------	-------	---------

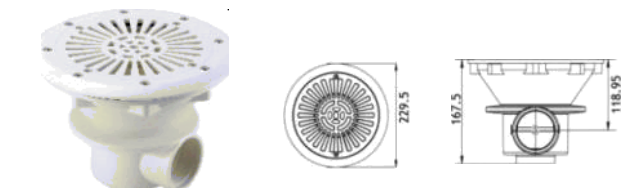


SP2850C	White	ABS+UV
---------	-------	--------




SP1423	White	ABS+PVC
--------	-------	---------

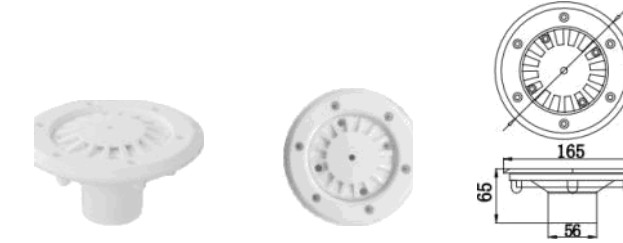


SP1426	White	ABS+PVC
--------	-------	---------

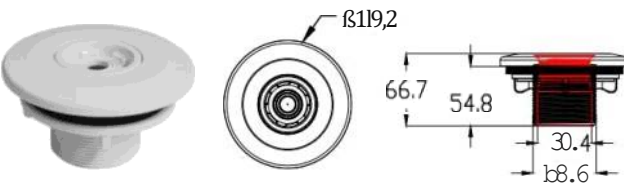


Model No	Colour	Material
	White	ABS+UV

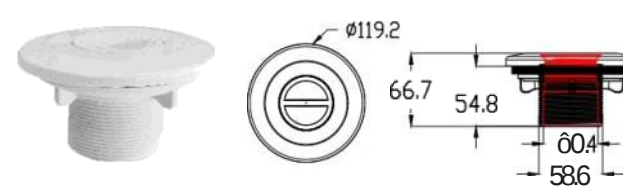


Model No	Colour	Material
SP1004V	White	ABS+UV

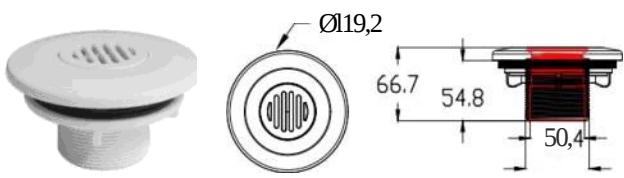


SP1005V	White	ABS+UV
---------	-------	--------

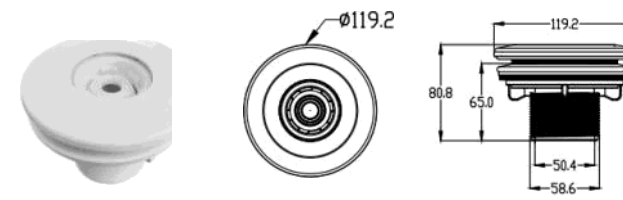


SP1006V	White	ABS*PVC
---------	-------	---------

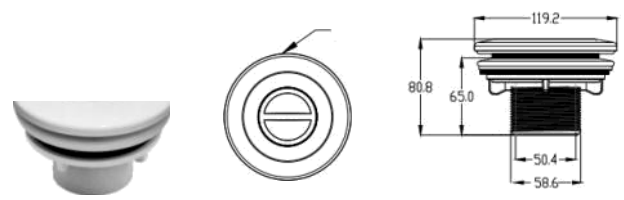

SP1007V	White	ABS*UV+PVC
---------	-------	------------

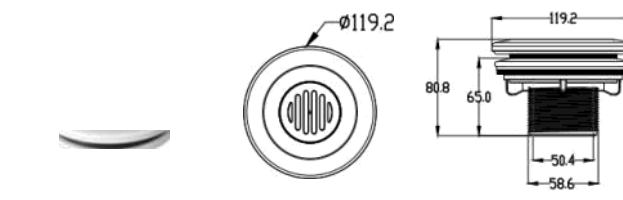

SP1008V	White	ABS*UV*PVC
---------	-------	------------

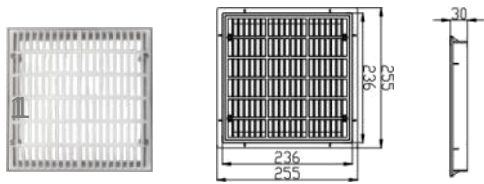


SP1029
SP1031
SP 1032

White
White
White

ABS
ABS
ABR

7"x7"
9"x9"
12"x12"

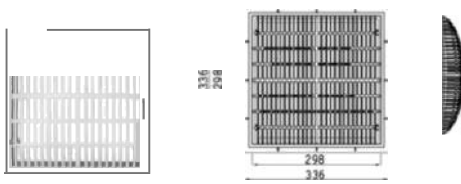


SP7035
SP1036

White
Mile

ABS
AgS

9"x9"
12"x12"



9P2840

Wtiie

ABS




SP1030



White


ABS

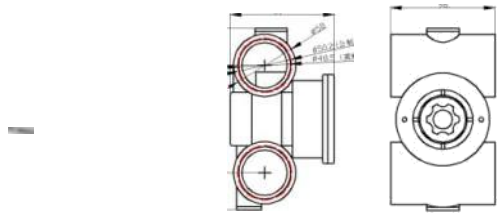

SPC428

White


A6S*UV

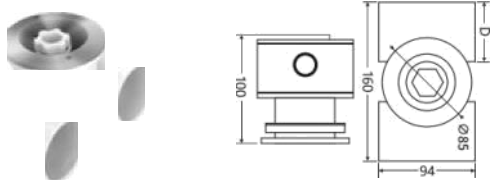

SP-1434S

Whe

55304+ABS

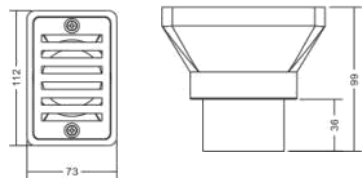


SP 2819

White

ABS+UV 6 PVC




SP2824

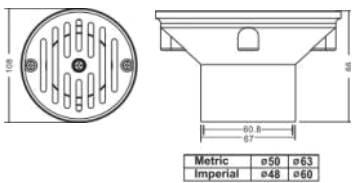

White

ABS+UV 6 PVC

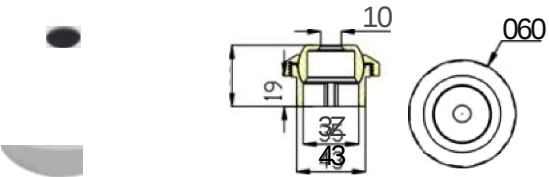


PL-1419B

White

J. S' 10mm

ABS+UV

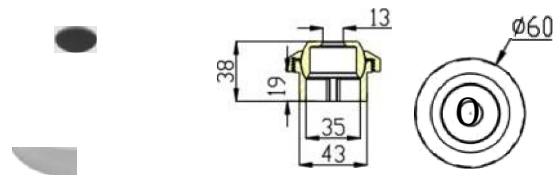


PL-1g19C

White

1.5" 12.5mm

ABS+UV




SP \022
SP1022

Whne
whiie

ABS+UV
ABS+UV

1.5"
2" thread




S P1022A
SP1022B

Wite
Wh*e

ABS+UV
ABS+UV


Below / Es

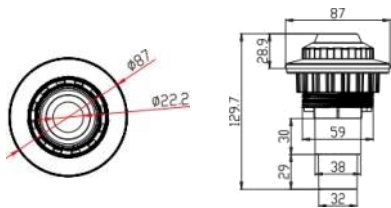

SP1009V

White

ABS



SP1420

white

AB8



SP1068
Check Valve
2" / 1.5"



F71
Double Union Ball Valve
Size: 1/2"to 4" thread,socket
1/2"-2": 23Spsi Max.
2-1/2-4": 150psi Max.




F-62
Butterfly valve

ssive spray no



SP2856




Grey

1.5"



SP1450T



White

AB8




H201
One-way thread union



SP2876
Connection
g" / y \$•



NON-0324
Wall condu it



B-158
Connector
white 1.5" / 2"



FO3
Tee
Size: DN50,Dn63 socket



FO9-90
Degree Elbow
Size: DN50,Dn63 socket



N103
1.5" 12"



H102
2"-1.5" / 1.5"-1"



H101
1.5" / 2"



F61
Single Union Ball Valve
Size: 1/2"to 2" thread,socket
235psi Max




A-128
Non-return valve 2" / 1.5"


Non-slip vinyl liner



Clear blue pool liner



Mosaic pool liner



Dark blue pool liner



Blue white pool liner

Clear blue pool liner	2x25(140) m	1.2mm
Mosaic pool liner	1.83x25 (40) m	1.5mm
Dark blue pool liner	1.83x25 (40) m	1.5mm
Blue white pool liner	1.83x25 (40) m	1.5mm



SP-1030S
Main drain



SP-1031 S
Main drain



SP-2866
Anchor type



N104
2" 1.5" / 1"



S90012 S
SS suction nozzle(screw)



SP-0024
SS water return(screw)




SP-0029
SS gutter drain(screw)




SP-0030
Copper floor drain

Instruction:




Instruction diagram showing the correct way to install the liner.

Installation details:



Remark:

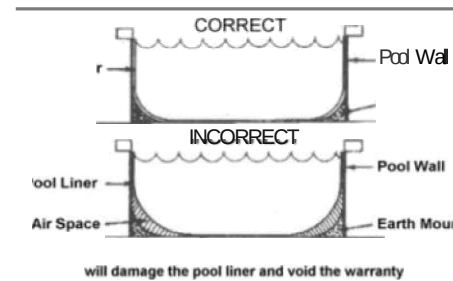

Ideal for residential pools. Manufactured in reinforced PVC-P, this materials is the most useful far lining pools thanks to enhanced malleability, resistance to tearing, ease of welding, resistance to discoloration by UV rays and with a wide range ad available colors.

Made-to-measure liners are put together by high frequency welding machines at our facilities. Perfectly adaptable to any pool design or shape, with excellent watertight features, so you can forget about annoying leaks.

"Ensures total watertightness in odd shaped pools or pools with numerous steps.

"Highly flexible and adaptable.

"Smooth and pleasant to touch, it is easy to maintain and durable.

"Highly resistant to impacts and tearing.

"PVC does not release dioxins into the atmosphere and can be recycled.

*Compatible with concrete, prefabricated or steel panel pools. Can also be installed in pools with overflow.



SP-2855
Discharge jet



SP-0022A
Motor pneumatic switch



SP-0022
Plastic chrome plating switch



SP-0023
Plastic adjust switch

Ladder Series



Ladder Series

SF Ladder

Model	A mm	B mm	G mm	D mm	E mm	F mm	G mm
SF 215	502	1330	650	640	180	200	250
SF—315	502	1580	650	640	180	200	250
SF—415	502	1830	650	640	180	200	250
SF—515	502	2080	650	640	180	200	250

SL Ladder

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
SL 215	502	1330	650	640	180	200	250
SL—315	502	1580	650	640	180	200	250
SL 415	502	1830	650	640	180	200	250
SL-515	502	2080	650	640	180	200	250





MU Ladder

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm
MU—215	502	1330	365	640	180	200	250
MU—315	502	1580	365	640	180	200	250
MU 415	502	1830	365	640	180	200	250
MU 515	502	2080	365	640	180	200	250

SP Ladder

SP ladders diameter g2mm polishing stainless steel ladders. sianless steel mead. Perfect curve designs. The surface is anlislippy. No minot faults with sharp sioe cape.

Item No.	Step	A mm	B mm	C mm	D mm	E mm	F mm
SP2+2	2+2	1150	1380	250	730	420	500
SP3+3	3+3	1150	1580	250	930	420	500
SP4+4	4+4	1360	1880	250	1230	420	500
SP4+4	4+4	1360	1900	250	1350	420	500
SP5+5	5+5	1700	2120	250	1530	420	500

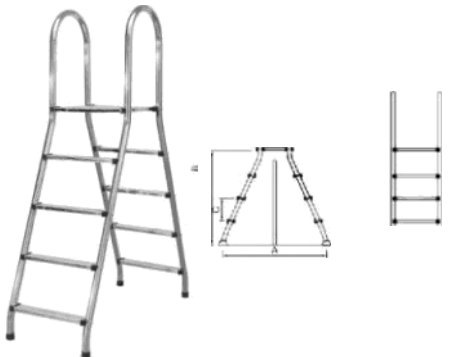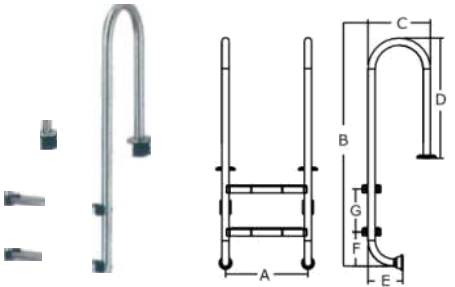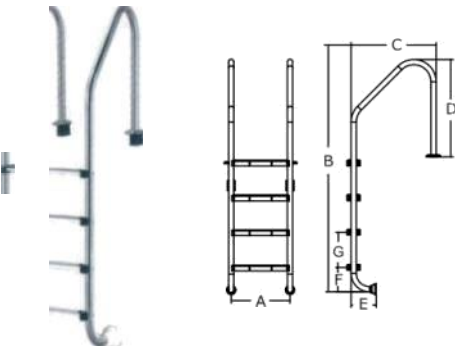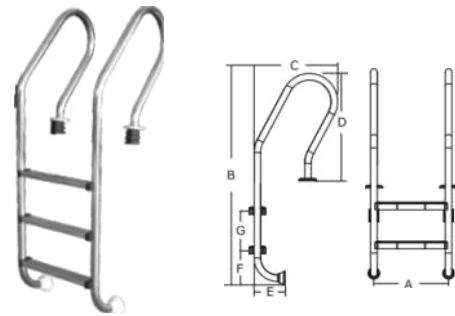

Stainl ess Steel Step



Stainless Steel
Step With Anti Slip



Anchor Type




Flange Type



LF Ladder											
Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	
LF215	493	1460	1042	830	190	200	250	561	831	750	
LF315	493	1710	1042	830	190	200	250	811	831	750	
LF415	493	1960	1042	830	190	200	250	1061	831	750	
LF515	493	2210	1042	830	190	200	250	1311	831	750	

With polished stainless steel pipe(O42mm), this ladder is specially designed for overflow pool with attractive appearance. Easily installed with anchoring or flange fixtures.

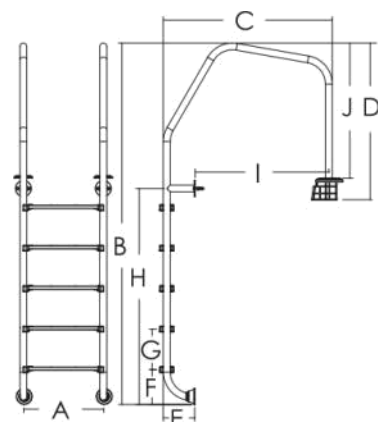

Anchor Type



Stainless Steel Step



Ancillary Shoring

The following components are for the installation of grad rails around the edge of the pool



Straight Hand

Polished Stainless Steel AISI 304 or AISI 316.
Handrail length in 1m.

Model: With AISI-304 With AISI -316



End Cap

Polished Stainless Steel AISI 304 or AISI 316.
For the end of 42mm pipe.


Model: With AISI-304 With AISI -316



Curved Connector

Polished Stainless Steel AISI 304 or AISI 316
For joining 42mm pipe.


Model: With AISI-304 With AISI-316

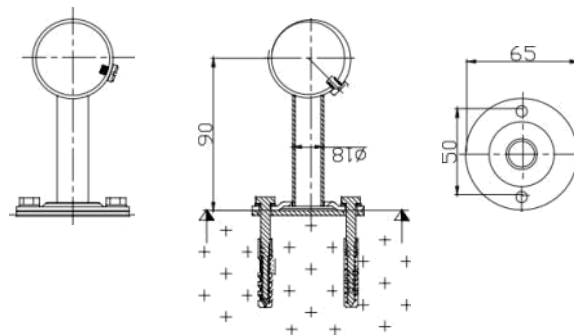

ARB Series

Polished AISI 304 or AISI 316 Stainless Steel(42mm) pipe
Both anchor and flange installations are available.


Model	Description
ARB-F	304 Exit Handrail
ARB-F	316 Exit Handrail

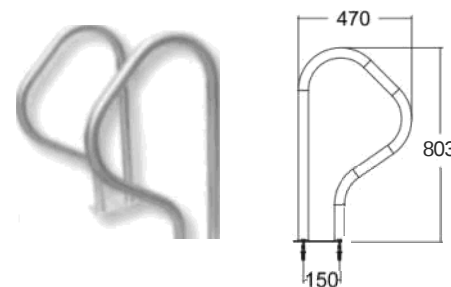

ARC Series

Polished AISI 304 or AISI 316 Stainless Steel(42mm) pipe
Both anchor and flange installations are available.

Model	Description
ARCF	304 Exit Handrail
ARCF	316 Exit Handrail

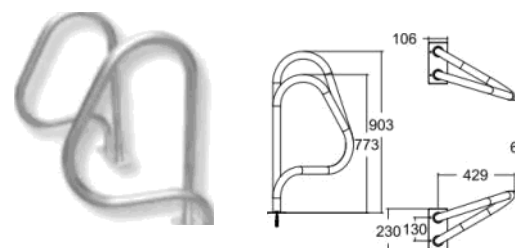

ARG Series


Polished AISI 304 or AISI 316 Stainless Steel(42mm) pipe.
Both anchor and flange installations are available

Model	Model	Description
ARG	ARG-F	304 Exit Handrail
ARG	ARG-F	316 Exit Handrail



预埋件
Anchor Type
ARG

法兰
Flange Type
ARG-F



ARS Series


Polished AISI 304 or AISI 316 Stainless Steel(42mm) pipe.
Both anchor and flange installations are available

Model	Model	Description
ARS	ARS-F	304 Exit Handrail
ARS	ARS-F	316 Exit Handrail



Anchor Type
ARS

Flange Type
ARS-F



Cleaning Equipment



Cleaning Equipment



Dolphin M200 Cleaner robot
Cable length 24 metre;
cycle time: 3 hours;



Dolphin PRox2 3002# Cleaner robot
Cable length 30m, remote control,
Programmable, climb wall



dolphin Z2# Cleaner robot
Cable length 45m, remote control,
Programmable, climb wall,
best choice for Olympic pool



HJ-20J2L
Automatic pool cleaner




PAC-08
Automatic pool cleaner
Requires a pump of minimum 0.75HP/550W
(minimum flow of 6.5m3/hr/1700gal/hr)



FTP-51
Manual pool cleaner



VTP-050
55 cleaning car

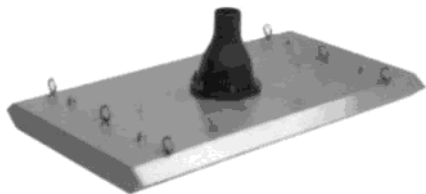

VTP-336
SS vacuum head
1000x350mm

FENTON®
 POOLS

Cleaning Equipment



PVH-01
Triangular Liner Vac Head w
Swivel Cuff



PVH-06
Deluxe triangular transparent
cast iron weighted vac head



PVH-07
Vac Head w/Side Brushes




PVH-03
Vac Head w/Side Brushes



PVH-09
Flexible Vac Head w
Swivel Brush For IG Pool



PVH-0B
Flexible Vac Head
For In-ground Pool



PV-05
14-19" Vacuum head



PV-03
14-19" Vacu/m head



PVH-17
Deluxe Vacuum
Brush w/Easy Button



PVH-18
Deluxe Vacuum Head w
Transparent Cover & Easy Button



PVH-16
Deluxe Pentagonal Vacuum
Head w/Easy Button 19"



PVH-19
14-19" Aluminium Folding
Vacuum Head w/4 Folding Panels



PLS-02
Professional Aluminium
Leaf Skimmer



PLS-1001
Deluxe Leaf Skimmer
w/Easy Button



PDRS-1001
Deluxe Deep Rake
w/Easy Button



PDRS-05
Professional Heavy Duty
Deep Rake w/Alu Frame



PDRS-10
Professional Deluxe Deep
Rake w/Squeegee Strip
and Replaceable Net



PLS-01
Standard leaf Skimmer(Blue)



PDRS-04
Economy deep bag rake



PDRS-01
Heavy duty plastic leaf rake
with long wearing screen mesh



PLS-03
Heavy duty plastic
leaf Skimmer(Blue)



PLSH-02
Leaf Skimmer with
48"/122cm Aluminium Pole

Cleaning Equipment

FENTON®
 POOLS


PB-04
Oversized Polybristle
Wall Brush w/EZ-clip



PB-11
18"/45cm Metal
Back wall Brush



PB-D8
18"/45cm Stainless
Steel Algae Brush



PB-02
18"/45cm Standard
Curved Wall Brush



PB-03
Flexible Brush w/
Alu Handle & Extra Bristles



PB-05
10"/26cm Polybristle
Wall Brush



PB-06
10"/26cm Stainless
Steel Algae Brush



PB-07
10"/26cm Polybristle
Wall Brush w/Alu
Handle and EZ-Clip



PD-01
Deluxe Large Chemical
Dispenser for 3" Tablets 9"



PT-13
Large Scale Floating
Dial Thermometer



PT-05
Deluxe Round
Thermometer w/String



PT-08
Jim BUoy
Thermometer w/String

PT-11
Coating Animal
Thermometer in 4 styles

Electronic Tester



PTK-02
PHOTO



PTK-01
Basic pH & Cl Test Kit(20cc)



PTK-OS
5-Way Test Kit (PH/Cl/Alkalinity/
Acid Demand/Bromine)



VTP-360
Telescopic Pole
3m/5m/7m/8m/9m



VTP-361
Life Saving Hook



H-R-01
Hose Reel Without Hose



VTP-362
Vacuum Hose
9/12/15/30m



VTP-363
Vacuum Hose
9/12/15/30m



VTP-364
Vacuum Hose
2"10m

FENTON®
 POOLS

Pool Cover



Ceramics



YCS-201



YCS-202

YCS-203




YCS-204

Swimming pool tiles are a special high-tech product, available in two types: glazed flat and textured corrugated surface, with complete specifications and perfect matching. The glazed flat type has various colors such as black, white, blue, etc. It is crystal clear and smooth. The corrugated surface type has the characteristics of simple and elegant, anti slip and wear-resistant. Specially designed for long-term immersion in water in swimming pools. It has water pressure resistance, corrosion resistance, and extremely high quality physical properties, without any chemical reaction to the human skin.



水質



YCS-205



YCS-206



YCS-207

YCS-208

YCS-209



YCS-210

Y 211



YCS-215



YCS-216




YCS-217




YCS-218




PY-4B704




PY-4B602



PY-4B501



PY-4B402




PY-4B303



Sauna & Steam Series

After enjoying sauna, you will feel relaxed, your body and brain freed from the boring work and daily life. Tired, or the headache has gone with the busy modern life, it's a good time to relax yourself.

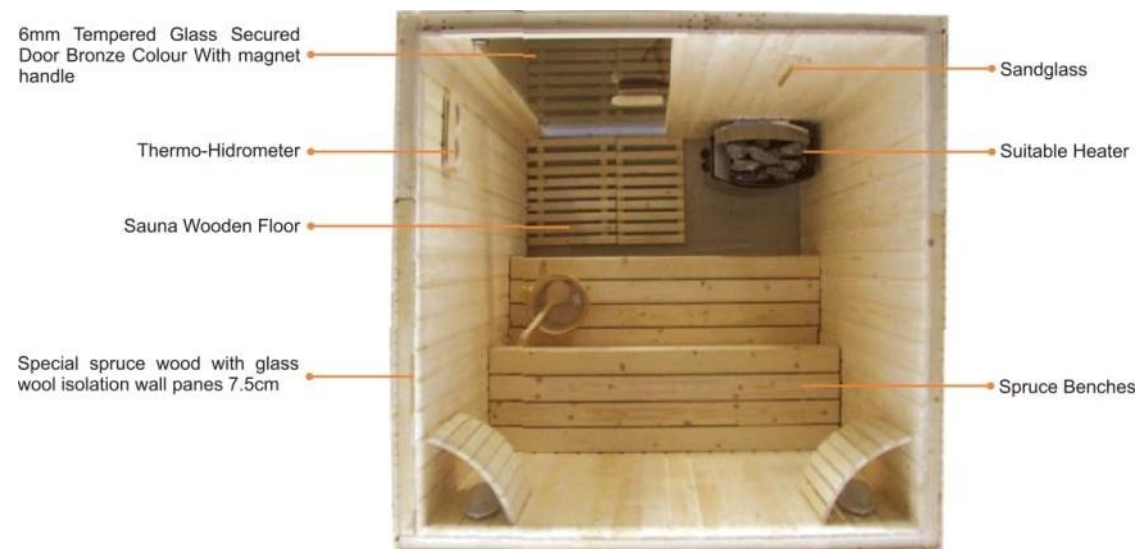

Luxury Combined Type Sauna Room

Material: Finland spruce, Aberbach, hemlock, canadian cedar, burmese cedar, hemlock.
Size: according to customer asking.




M-2020
2000x2000x2100mm



D-1815
1800X1500X2100mm



K-2015
2000X 1500X2100mm

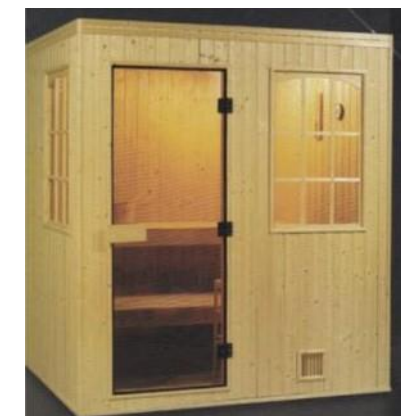

E-2018
2000X 1800X2100mm



A-1212
1200X 1200X2100mm





H-3025
3000X2500X2100mm


Sauna Series





1100x1200x2100mm




1500x1800x 2100mm



2000x2000x2100mm



2000 x2000x 2100mm



Sauna Series

KV-AC100
900*900*1900KV-AC200
1200*1000*1900KV-AC320
KD Series
1300*1200*2000KV-AC300
1500*1000*1900KV-AC400
1800*1200*1900KV-AC500
1200X 1300X2000mm

Sauna Series



A - Fann Frared sweat stream room series

Model:	MH 01A	M-00ZA		KN-004A
Size:	90*95*190cm	120*105*190cm	150*115*190cm	180*125*190cm
Voltage:	110v/220v	110v/220v	110v/220v	110v/220v
Power:	1400w	1700w	2100w	2600w
Material:	spruce wood	Cedar wood		



B - Farin Frared sweat stream room series

Model:	KN-001B	KN-002B	KN-003B	KN-004B
Size:	90*95*190cm	120*105*190cm	150*115*190cm	180*125*190cm
Voltage:	110v/220v	110v/220v	110v/220v	110v/220v
Power:	1400w	1700w	2100w	2600w
Material:	Spruce wood	Cedar wood		



C - Farin Frared sweat stream room series


Model:	UN-001C	KN-002C	KN-003C	KN-004C
Size:	90*95*190cm	120*105*190cm	150*115*190cm	180*125*190cm
Voltage:	110v/220v	110v/220v	110v/220v	110v/220v
Power:	1400w	1700w	2100w	2600w
Material:	Cedar wood			



H - Farin Frared sweat stream room series

Model:	KN-001H	M-002H	KN-004H	KN-004H
Size:	90*95*190cm	120*105*190cm	150*115*190cm	180*125*190cm
Voltage:	110v/220v	110v/220v	110v/220v	110v/220v
Power:	1400w	1700w	2100w	2600w
Material:	Cedar wood			

"Fenton" Sauna Heater Series

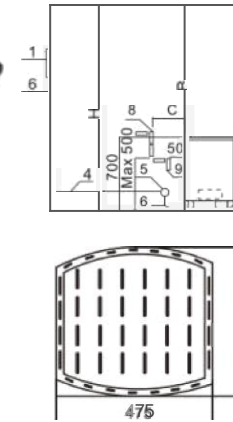



Sauna room				Min.Distance to heater			
H-105	J0.5	9	15	190	12	120	15
H-135	J3.5	1\	ZO	210	16	140	20
H-165	16.5	16	25	210	16	140	20

Technical Characteristics

H-105	10.5KW	9-15
H-135	13.5KW	10-18
H-165	16.5KW	14-24



Installation dimension





Distance	4.5KW	6KW	8KW	9KW
A(mm)	35	50	100	120
B(mm)	20	30	30	40
C(mm)	35	50	80	100

Technical Characteristics

H-45B	4.5KW	3-6
H-60B	6.0KW	5-9
H-80B	8.0KW	8-12
H-90B	9.0KW	9-13



Installation dimension



	4.5KW	6KW	8KW	9KW
A(mm)	35	50	100	120
B(mm)	20	30	30	40
C(mm)	35	50	80	100

Technical Characteristics



H-45BS	4.5KW	3-6
H-60BS	6.0KW	5-9
H-80BS	8.0KW	8-12
H-90BS	9.0KW	9-13

Steam Room Series



Steam Room

STEAM ROOM	
Model	Size(mm)
6A	2460*1800*2150
8A	3050*1800*2150
10A	3640*1800*2150
12A	4230*1800*2150
14A	4280*1800*2150
16A	5410*1800*2150
2B	1260*1020*2150
4B	1800*1280*2150
6B	1800*1870*2150
8B	1800*2460*2150
MOB	1800*3050*2150
12B	1800*3740*2150
14B	1800*4230*2150
16B	1800*4820*2150
10C	2500*2120*2250
2C	3080*2120*2250
14C	3660*2120*2250
16C	4240*2120*2250
18C	4900*2120*2250
20C	5480*2120*2250
4D	2120*1340*2250
6D	2120*1340*2250
7D	2120*1920*2250
8D	2120*1920*2250
10D	2120*2500*2250
12D	2120*3080*2250
14D	2120*3660*2250
2G	1270*1340*2250
12E	2500*3100*2200
16E	3700*3100*2200
18E	4300*3100*2200
20E	4900*3100*2200
8F	3100*1300*2200
10F	3100*1900*2200
12F	3100*2500*2200
14F	3100*3100*2200
16F	3100*3700*2200
18F	3100*4300*2200
20F	3100*4900*2200

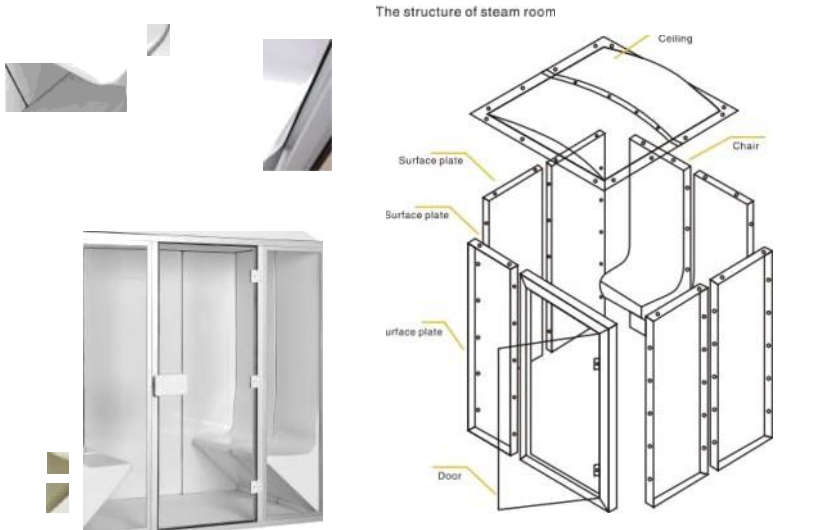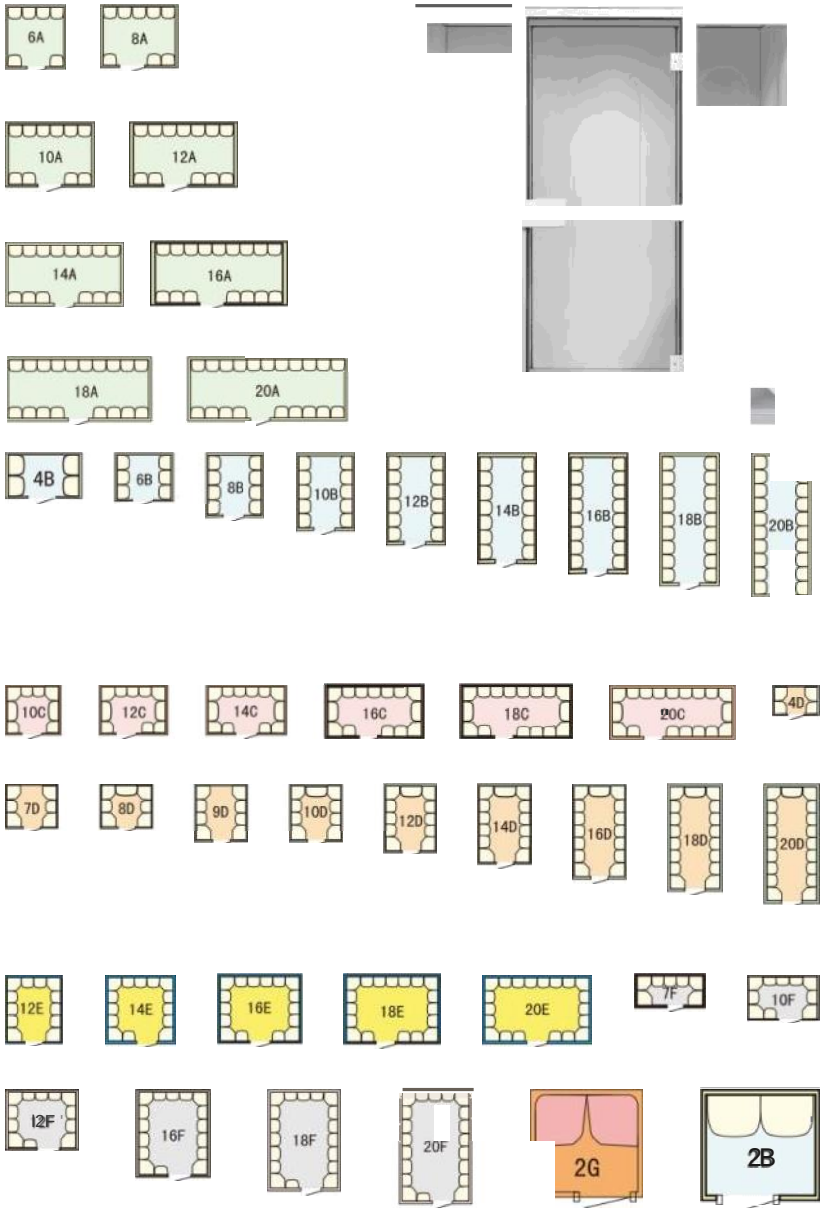

FENTON®
POOLS

Luxury Steam Room

NEW PRODUCT

JOYSPA STEAM ROOM

ENHANCE YOUR LIFESTYLE

EXPERIENCE PERFECT ENJOYMENT

KDL

Material: Tempered glass. Acrylic
304Stainless steel/ Aluminium alloy

Control system: Smart control system

Function: Intelligent touch screen
wireless control panel, FM radio CD
player. MP3. Temperature/Time
adjusting with top light. 3kw
steam generator. Lock function.
Moveable thermotherapy shower tap




Others:

1. Frame Color (Black. Grey)
2. Plate Material option:
Imported Acrylic. Chinese Acrylic
3. Steam generator option:
Imported steam generator
4. Installation accessories.



Product Structure:

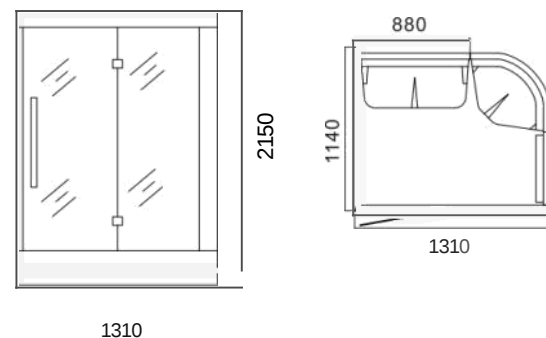

KDL-02A
Product Size:


1310x1140x2150mm

Luxury Steam Room

Material: Tempered glass. Acrylic
304Stainless steel/ Aluminium alloy



Control system: Smart control system

Function: Temperature/Time adjusting.
top light. 4.5-18kW steam generator





Others:


1. Frame Color (Black. Grey)
2. Plate Material option:
Imported Acrylic, Chinese Acrylic
3. Steam generator option:
Imported steam generator
4. Installation accessories.




Product Structure:




More Product Structure




KDL-12B
Size:2250x3120x2150mm




KDL-14B
Size:2250x3720x2150mm




KDL-16B
Size:2250x4320x2150mm



KDL-18B
Size:2250x4920x2150mm



KDL-20B
Size:2250x5520x2150mm




KDL-22B
Size:2250x6120x2150mm



FENTON® POOLS

Steam Series

H3HC Series

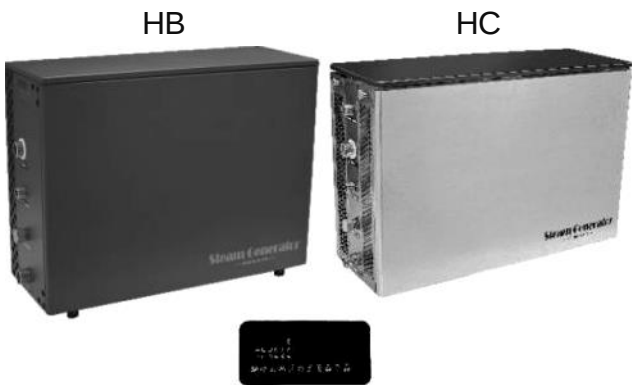

HARIYA ' Series



Technical Characteristics

Model	Power(kw)	Voltage(Vt)	Room(ml)
HB-45/HC-45	4.5	380	3-5
H8-60/HC-60	6.0	380	6-7
HB-90/HC-90	9.0	380	10-12
H8-120/HC-120	12	380	>18
H8-150/HC-150	15	380	18-21
H8-180/HC-180	18	380	21-25
H8-210/HC-210	21	380	26-30

Technical Characteristics

Model	Power(kw)	Voltage(V)	Dimensions(mm)
HA-40	4.0	220/380	210*650*430
HA-60	6.0	220/380	210*650*430
HA80	8.0	220/380	210*650*430
HA.90	9.0	220/380	210*650*430
HAJ20	12	380	260*650*600
HAJS0	15	380	260*650*600
HA180	18	380	260*650*600

"STCMKOT" Series



Technical Characteristics

Model	Power(M)	Vokeye(V)	Current(A)	Room(m³)	AWG
ST-30	3.0	200-240	13.6	2.5-5	3"11
ST&0	4.0	200-240	18.2	5-6	3"10
ST-50	6.0	200-240	27.3	y	3"8
		380-415	9.1		5"13
ST-70	7.0	200-240	31.8	7-9	3"8
		380-415	11.4		5"12
ST-80	8.0	200-240	36.4	9-10	3"7
		380-415	13.6		5"13
ST-90	9.0	200-240	41	10-12	3"7
		380-415	13.6		5"11
ST-105	10.5	380-415	16	12-15	5"11
ST-120	12.0	380-415	18	15-18	5"10
ST-150	15.0	380-415	23	18-21	5"9
ST-180	18.0	380-415	27.3	21-24	5"8

"KASDALY" Series



Technical Characteristics

Model	Power(kw)	Voltage(V)	Current(A)	Room(m³)	AWG
DON-45	4.5	200-240	20	3-5	00
		300-415	7		5"14
DOI-60	6.0	200-240	27.3	6-7	3"8
		380-415	9		5"13
DON-90	9.0	200-240	41	10-12	3"7
			14		5"11
OON-105	10.5	380-415	16	12-15	5"11
DON-120	12.0		18	15-18	5"10
OON-150	15.0		23	18-21	5"9
DON-180	18.0	380-415	27.3	21-25	5"8



SPA Hot Tub Series



TYS-0010B
450X450 X460mm

MY-00 10A
190 0X640X800 mm

TYS-007




ART G3051

ART 1244



TYS-003

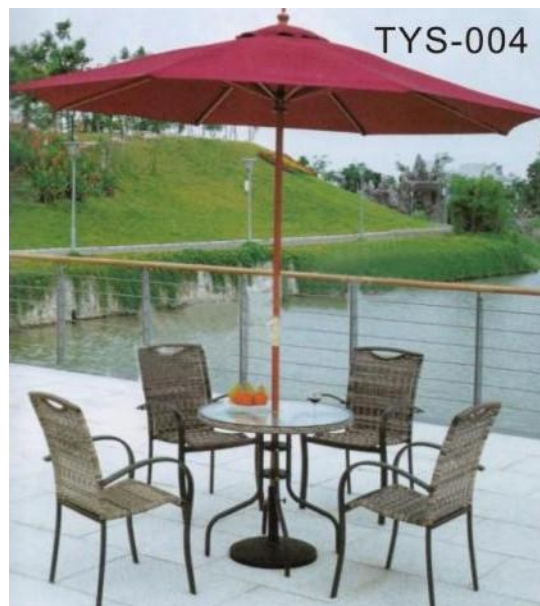

TYS-004



TYS-005



NEW PRODUCT

ENHANCE YOUR LIFESTYLE
EXPERIENCE PERFECT ENJOYMENT

Model Y-8605

Dimensions	SB\$0mmx2200 mmx1500 mm
Capacity	11000L
Seating	2 seats
Dry Weight	1500kg
Filled Weight	11000 L
Total Jets	24pcs



Equipment	
Counter Current Pump	1x2.8 KW/380V
High Performance Pumps	1x2HP
Circulation Pump	1x1.0 HP
9-speed flow controller	1pc
LED Light	1pc
Ozone	1pc
Plastic wood skirt LED light belt	1pc
Inlet/outlet	1pc
Sand filter P400	1pc
Cartridge filter	1pc
Headrest	2pcs
Fiberglass Base Tray	1pc



SHTS 8801A

Dimensions	6900mmX2220mmX1550mm
Capacity	9000L
Seating	2seats
Dry Weight	1600kg
Filled Weight	9000kg
Total Jets	24pcs

Equipment	
Counter Current Pump	1X2.8KW/380V
High Performance Pumps	1X2HP
Circulation Pump	1X 1HP
Heater	1X3KW
LED Light LED	1pc
Synthetic Cabinet	1pc
Drain	1pc
Filtration	1pc
Headrest	2pcs
Sand Filter P400 (options)	2pcs



9-speed flow controller 1pc



SHTS 8601

Dimensions	5850mmx2200mmx1520mm
Capacity	7600L(Approx)
Seating	5seats+1lounger
Dry Weight	1275kg(Approx)
Filled Weight	8000kg(Approx)
Total Jets	59pcs

Equipment	
High Performance Pumps	2x2HP, 2x3HP
Circulation Pump	2x0.5HP
Heater	2x3kw
LED Light	2pc
Blower	400W
Aromatherapy	1pc
Ozone	1pc
Controller	2pcs
Synthetic Cabinet	1pc
Drain	1pc
Filtration	2pcs
High Density Foam Insulation	1pc
Headrest	5pcs



SHTS 8602

Dimensions	5850mmx2200mmx1600mm
Capacity	8500L(Approx)
Seating	4 seats
Dry Weight	1300kg
Filled Weight	11000kg
Total Jets	51 pcs

Equipment	
High Performance Pumps	3x3HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Ozone	1pc
Controller	1pc
Synthetic Cabinet	1pc
Drain	1pc
Filtration	2pcs
High Density Foam Insulation	1pc



Headrest 2pcs



SHTS 8802

Dimensions	5700mmx2240mmx1520mm
Capacity	7600L
Seating	2seats
Dry Weight	1275kg
Filled Weight	8000kg
Total Jets	47pcs

Equipment	
High Performance Pumps	3x3HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Ozone	1pc
Controller	1pc
Synthetic Cabinet	1pc
Drain	1pc
Filtration	1pc
High Density Foam Insulation	1pc
Headrest	2pcs



Fiberglass Base Tray 1pc


SHTS 8603

Dimensions	4180mmx2200mmx1430mm
Capacity	5600L(Approx)
Seating	2seats
Dry Weight	1000kg
Filled Weight	6500kg
Total Jets	28pcs

Equipment

High Performance Pumps	2x2HP 1x3HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Ozone	1pc
Controller	1pc
Synthetic Cabinet	1pc
Drain	1pc



Filtration	1pc
High Density Foam Insulation	1pc
Headrest	2pcs


SHTS 8801

Dimensions	5870mmx2280mmx1520mm
Capacity	7600L
Seating	2seats+1lounger
Dry Weight	1275kg
Filled Weight	8000kg
Total Jets	61pcs

Equipment

High Performance Pumps	3x3HP
Circulation Pump	2x0.5HP
Heater	2x3kw
LED Light	1pc
Blower	400W
Aromatherapy	1pc
Ozone	1pc
Controller	2pcs



Synthetic Cabinet	1pc
Drain	1pc
Filtration	1pc
High Density Foam Insulation	1pc
Headrest	3pcs
Fiberglass Base Tray	1pc


SHTS 8803

Dimensions	4560mmx2240mmx1520mm
Capacity	5600L
Seating	2seats
Dry Weight	1000kg
Filled Weight	6500kg
Total Jets	43pcs

Equipment

High Performance Pumps	3x3HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Ozone	1pc
Controller	1pc
Synthetic Cabinet	1pc
Drain	1pc
Filtration	1pc



High Density Foam Insulation	1pc
Headrest	2pcs
Fiberglass Base Tray	1pc


SHTS 8001

Dimensions	4000mmx2200mmx950mm
Capacity	3000L
Seating	6seats+2loungers
Dry Weight	860kg
Filled Weight	4230kg
Total Jets	114pcs

Equipment

High Performance Pumps	2x3HP, 1x2HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Blower	400W
Aromatherapy	1pc
Ozone	1pc
Controller	1pc



Synthetic Cabinet	1pc
Drain	1pc
Filtration	2pcs
High Density Foam Insulation	1pc
Headrest	8pcs
Fiberglass Base Tray	1pc


SHTS 8005
JY8005

Dimensions	2100mmx1050mmx760mm
Capacity	600L
Seating	2seats
Dry Weight	180kg
Filled Weight	780kg
Total Jets	23pcs

Equipment

High Performance Pumps	1x2HP 2speed
Heater	1x3kw
LED Light	1pc
Blower	300W
Ozon	1pc
Controller	1pc
Synthetic Cabinet	1pc



Drain	1pc
Filtration	1pc
High Density Foam Insulation	1pc
Headrest	2pcs
Fiberglass Base Tray	1pc


SHTS 8005A
JY8005A

Dimensions	2100mmx1050mmx760mm
Capacity	600L
Seating	1 lounger
Dry Weight	180kg
Filled Weight	780kg
Total Jets	23pcs

Equipment

High Performance Pumps	1x2HP 2speeds
Heater	1x3kw
LED Light	1pc
Ozon	1pc
Controller	1pc
Synthetic Cabinet	1pc



Drain	1pc
Filtration	1pc
Headrest	1pc
Fiberglass Base Tray	1pc


SHTS 8006

Dimensions	2100mmx1650mmx790mm
Capacity	950L
Seating	2loungers +1seat
Dry Weight	300kg
Filled Weight	1250kg
Total Jets	24pcs

Equipment

High Performance Pumps	1x3HP 2speeds
Heater	1x3kw
LED Light	1pc
Ozon	1pc
Controller	1pc
Synthetic Cabinet	1pc



Drain	1pc
Filtration	1pc
High Density Foam Insulation	1pc
Headrest	2pcs
Fiberglass Base Tray	1pc


SHTS 8020

Dimensions	2000mmx2000mmx900mm
Capacity	1400L
Seating	4seats+1 lounger
Dry Weight	350kg
Filled Weight	1750kg
Total Jets	33pcs

Equipment

High Performance Pumps	1x3HP
Circulation Pump	1x0.5HP
Heater	1x3kw
LED Light	1pc
Ozone	1pc
Controller	1pc
Synthetic Cabinet	1pc



Drain	1pc
Filtration	1pc
High Density Foam Insulation	1pc
Headrest	1pc
Fiberglass Base Tray	1pc